MOEN[®]

Specifications

DESCRIPTION

- Available finishes identified by suffix
- · Fixed mount showerhead
- · Nonmetallic spray face and shell
- Brass swivel ball assembly
- Rub clean nozzles

OPERATION

- 5 functions: downpour, rinse, full coverage, massage and wide coverage
- Rotate outer ring to select

FLOW


• Designed to deliver 2.5gpm (6.65L/min) at 80 psi

STANDARDS

 Designed and manufactured to comply with the requirements of: ASME A112.18.1/CSA B125.1 and all requirements referenced therein


WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original homeowner
- 10 year limited warranty when used in a multifamily installation
- 5 year limited warranty when used in a commercial installation Visit www.moen.com/support for complete details and limitations



CALDWELL™ 5-Function Showerhead

Models: 205W2 series

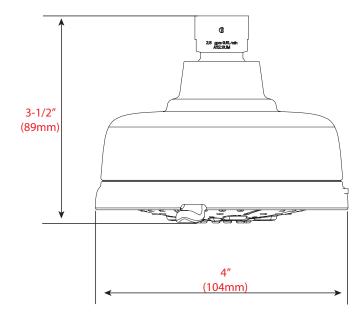

CRITICAL DIMENSIONS

(DO NOT SCALE)

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN

www.moen.com