




FEATURES

- Deep, Ergonomic Bathing Well
- 1" Low-Profile Deck
- Pre-Leveled Support Base
- Slip Resistant Floor
- Premium Cast Acrylic Surface
- Limited Lifetime Warranty
- Reversible Drain
- High Gloss Durable Acrylic
- Made in USA

AVAILABLE SYSTEMS

DRIFTBATH ONLY

- Up to 70 water portals
- Quiet, energy-efficient .75 hp pump with integrated heat-transfer
- Electronic control
- 4 high-intensity LED Chromatherapy
- Available in White or Biscuit
- Dozens of low-profile, water only portals for a one of a kind hydrotherapy experience

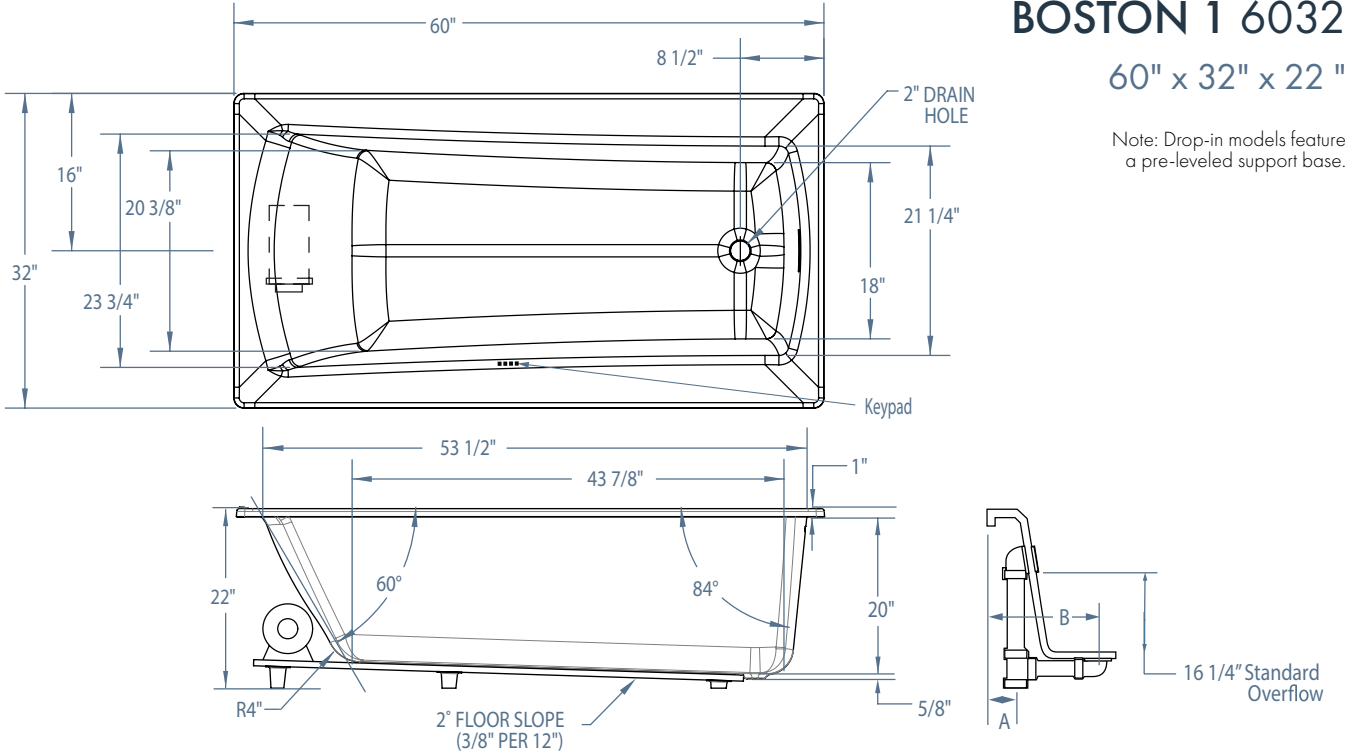

FEATURES Dimensional Tolerance ± 3/8". Dimensions needed for site preparation should be measured from the unit. Manufacturer assumes no responsibility for preparatory work.

Type & Model #	Material	System	Powered By	Heater	Controls	Drain	Pkg. Wt. lbs
DriftBath #6032BDB	Cast Acrylic	Water Circulation	Pump	Integrated	Electronic	Universal	168 lbs

DIMENSIONS

Width	Depth	Height	Skirt Height
60"	32"	22"	—

SUMP DATA

Capacity to Overflow	Min. Operating Capacity	Top	Bottom	Top	Bottom
Standard: 61 gal	—	53 1/2"	43 7/8"	23 3/4"	20 3/8"
		WIDTH @ centerline		DEPTH @ centerline	

PLUMBING DIMENSIONS

A	B	Drain to Overflow	Skirt Height
1 3/8"	8 1/2"	16 1/4"	2" - 1 5/8"

ELECTRICAL DATA

Component	Specification	Requirement
Pump (DriftBath)	3/4 HP; 8.8 AMP; 120V	20 AMP; 120V, separate circuit; Class A GFCI

Notes:

- 1) Where applicable, utilize cut-out templates packed with unit for deck cutouts.
- 2) 16 x 16 minimum access required at pump/blower location(s).