


ASSEMBLY INSTRUCTIONS

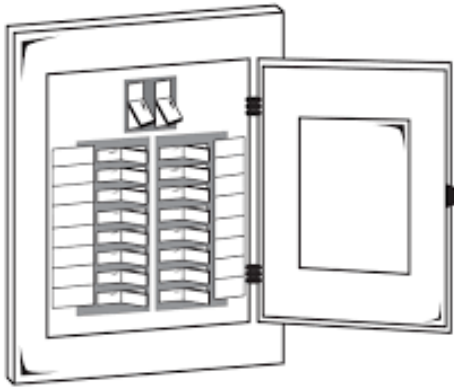


1. Turn OFF the electrical power at the main fuse or circuit breakers.

NOTE: Before continuing installation, confirm that the power is still turned off at the main circuit breaker or by removing the correct fuse. Turning the power off using a wall switch is not sufficient to prevent electrical shock.

2. The mounting bracket is shipped inside the canopy. Loosen the two canopy mounting screws and separate the bracket from the canopy. Secure the mounting bracket to the outlet box (not included) using the screws and washers provided with the outlet box.


WARNING: To reduce the risk of fire electrical shock, or personal injury, mount to the outlet box marked “acceptable for fan support” using the mounting screws and washers provided with the outlet box.

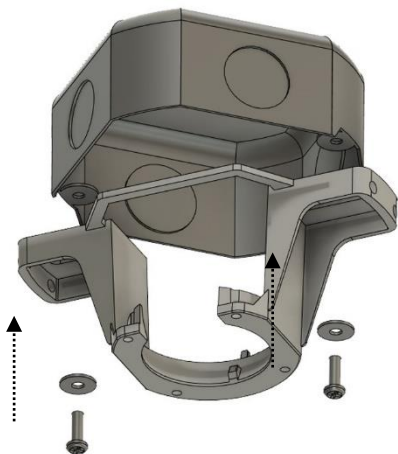

3. **DOWNROD ASSEMBLY & MOUNT for 6” DOWNROD** – Remove the downrod pin and downrod clip from the downrod.

Slide the canopy onto the downrod with the open end facing up toward the ball. Then slide the yoke cover onto the downrod with the flat end toward the canopy and downrod ball.

Note: If using 4” downrod (included), eliminate the yoke cup to allow for adequate access to canopy for wiring.

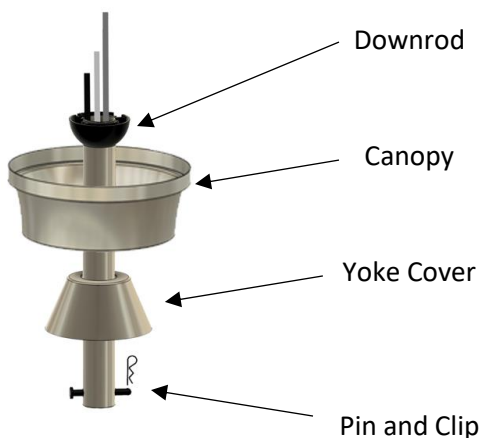

ASSEMBLY INSTRUCTIONS

4



4. Loosen but do not remove the two set screws in the yoke. Set screws need to be loosened enough to fully insert the downrod.

5




5. Feed the entire length of the 3 wires coming from the fan through the bottom of the downrod and out the top of the downrod ball. Insert the downrod into the yoke and reinstall the downrod pin and downrod clip. Then re-tighten the two set screws.

NOTE: With wiring extending out the top of the downrod ball, measure 10 – 12 inches of lead wire and cut the excess wire with wire cutters if using the 6" downrod. Then strip $\frac{1}{2}$ " of insulation from the end of each wire.

For extension downrods measure as needed.

ASSEMBLY INSTRUCTIONS

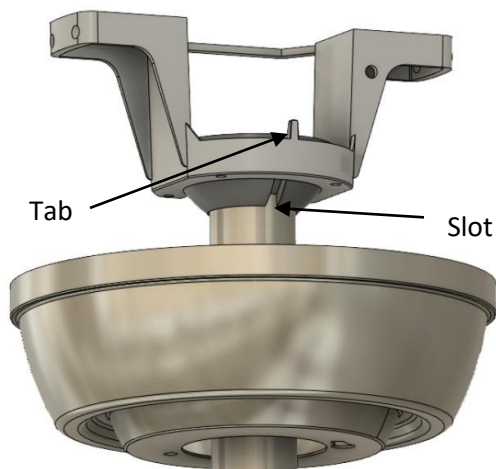

6. Lift the downrod into the mounting bracket. Rotate the downrod until the tab in the mounting bracket is seated in the slot in the downrod ball.


WARNING: The fan and/or downrod should not rotate in the mounting bracket if installed correctly. Failure to align the slot in the downrod ball with the tab may result in fan falling causing serious injury or death.

Canopy as pictured for illustration purposes only – canopy shape in your specific fan may be slightly different.



7. **WIRING THE FAN AND REMOTE RECEIVER--** Slide the remote receiver into the mounting bracket with the slotted side facing down toward the downrod ball.

ASSEMBLY INSTRUCTIONS

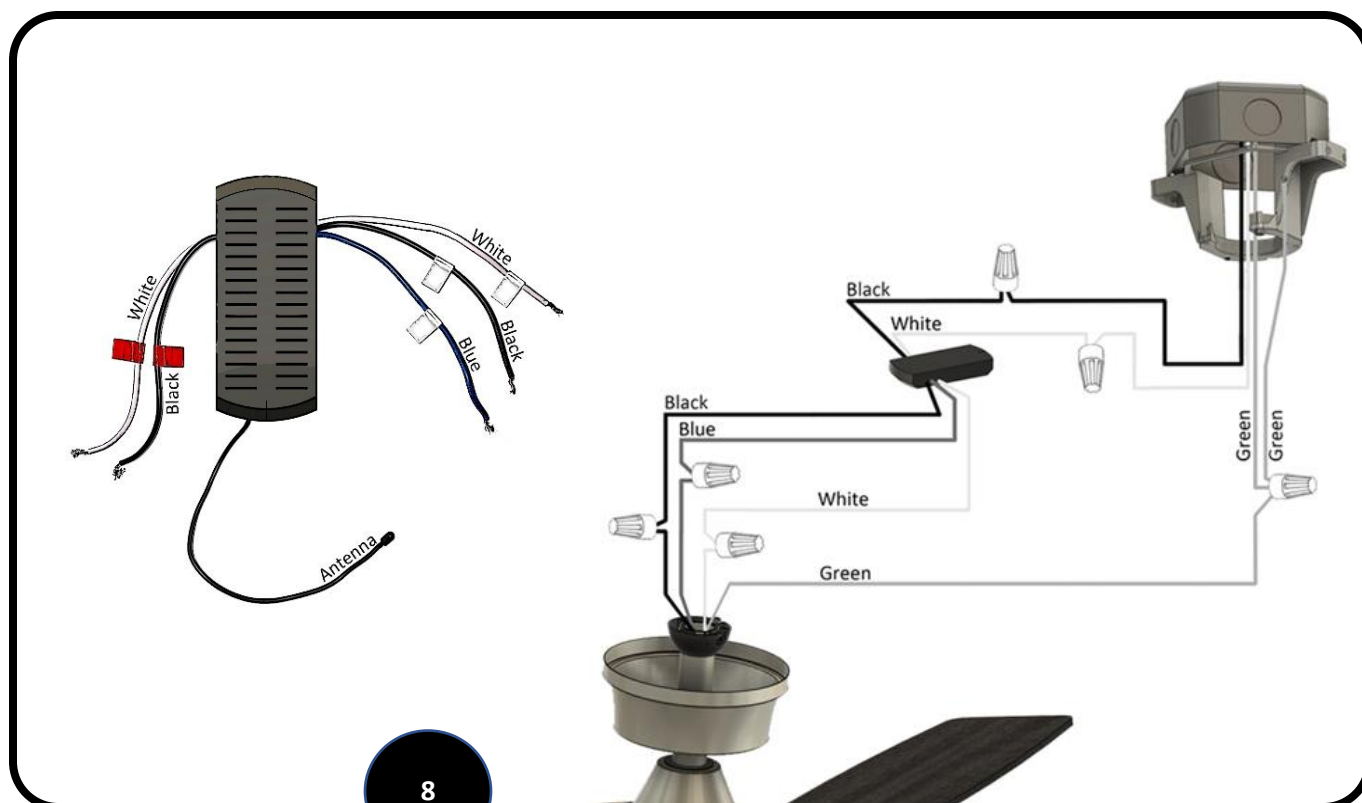

8

8. Use the supplied wire connectors to connect the fan wires to the remote receiver and then the receiver to the power supply wires according to the wiring diagram and following instructions:

Connecting the fan to the remote receiver:

- Connect the white wire from the fan to the white (common) wire from the 3-wire side of the receiver.
- Connect the black wire from the fan to the black wire from the 3-wire side of the receiver.
- Connect the blue wire from the fan to the blue wire from the 3-wire side of the receiver.

Connecting the remote receiver to the power supply:


- Connect the white wire from the 2-wire side of the receiver to the white wire coming from the ceiling.
- Connect the black wire from the 2-wire side of the receiver to the black wire coming from the ceiling.
- Connect all green (ground) wires together: Connect the green wire from the downrod to the green wire from the mounting bracket and the green wire from the ceiling.
- **IMPORTANT:** Make sure all connections are secure and the wires do not come loose from the wire nuts. Carefully turn the splices upward through the hanger bracket and push them back up into the outlet box. Place the black and white wire connections on opposite sides of the outlet box. Be sure to tuck the antenna wire inside the canopy but not up inside the outlet box.

ASSEMBLY INSTRUCTIONS



9


9. Locate the (2) screws on underside of hanging bracket and loosen screws. Place rounded part of slotted hole in canopy over the loosened screws in hanging bracket and push up. Make sure all wires are tucked into the canopy and will not be pinched, including the black antenna wire. Twist canopy to lock. Tighten screws securely.

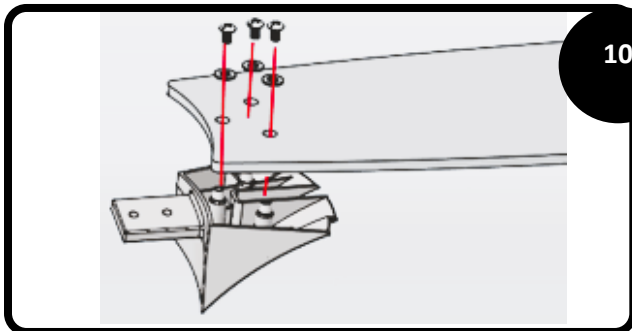

10

INSTALLING THE BLADES

10. Place the blade over the top of the blade holder and line up the (3) holes in the blade with the (3) screw holes in the blade holder. Securely fasten the blade to the blade holder using the (3) blade screws and (3) fabric washers as shown. Repeat for the remaining (4) blades.

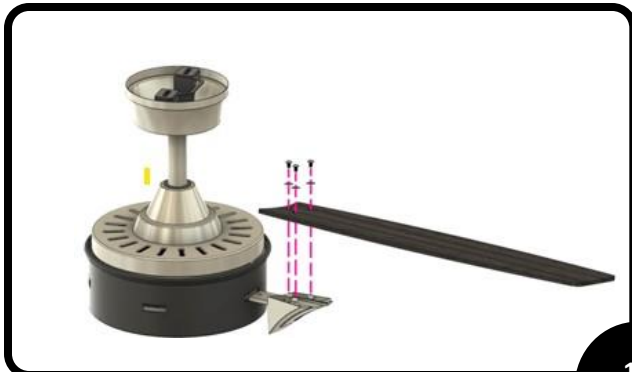


11

11. Insert the blade holder into the blade slot around the motor housing and line up the (2) holes at the end of the blade holder with the (2) holes on the bottom of the motor housing. Secure the blade holder to the fan using (2) blade holder screws.




Repeat for the remaining (4) blades.

ASSEMBLY INSTRUCTIONS

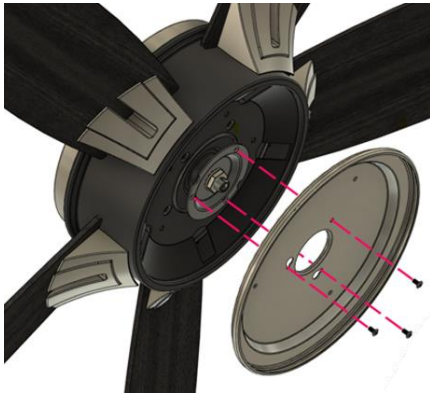


CONNECTING THE LIGHT KIT PLATE

- 12.** Remove one (1) of the pre-installed screws on the motor ring and loosen the other two (2) screws. Position the light kit plate under the fan and feed the light kit wire through the cut out in the center of the light kit plate. Line up the two keyhole slots on the light kit plate with the two loosened screws and lock into place and tighten down. Install the remaining screw in the remaining hole.

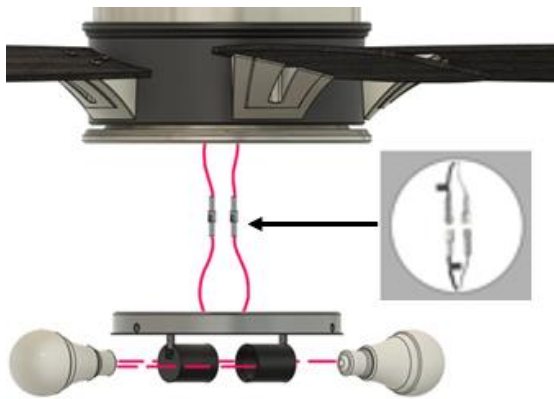

CONNECTING THE LIGHT KIT

- 13.** Light kit plate: Connect the light kit wiring harness by inserting the white wire from the fan to the white wire from the light kit and the black (or blue) wire from the fan to the black wire from the light kit. Be sure connections are firmly inserted and secure.

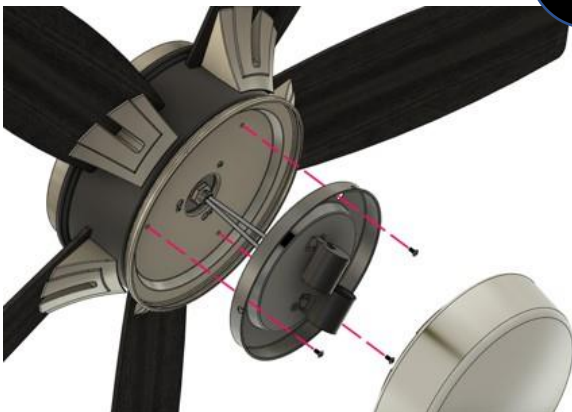

Light kit: Remove one (1) of the screws attached to the bottom of the light kit plate and loosen the other two (2). Line up the reverse switch with the cut-out in the light kit plate for the reverse switch. Position the light kit to line up with the two screws on the bottom of the light kit plate and tighten down. Insert and tighten down the remaining screw.

ASSEMBLY INSTRUCTIONS




14

14. INSTALLING THE LIGHT KIT GLASS

Install the (2) LED bulbs.

Position the glass bowl to line up with the bottom of the light kit. While holding the glass up to the bottom of the light kit, turn the glass clockwise until the notch in the glass slips into the light kit channel. Continue to turn clockwise until snug and tight. **DO NOT OVERTIGHTEN.**

Assembly complete.

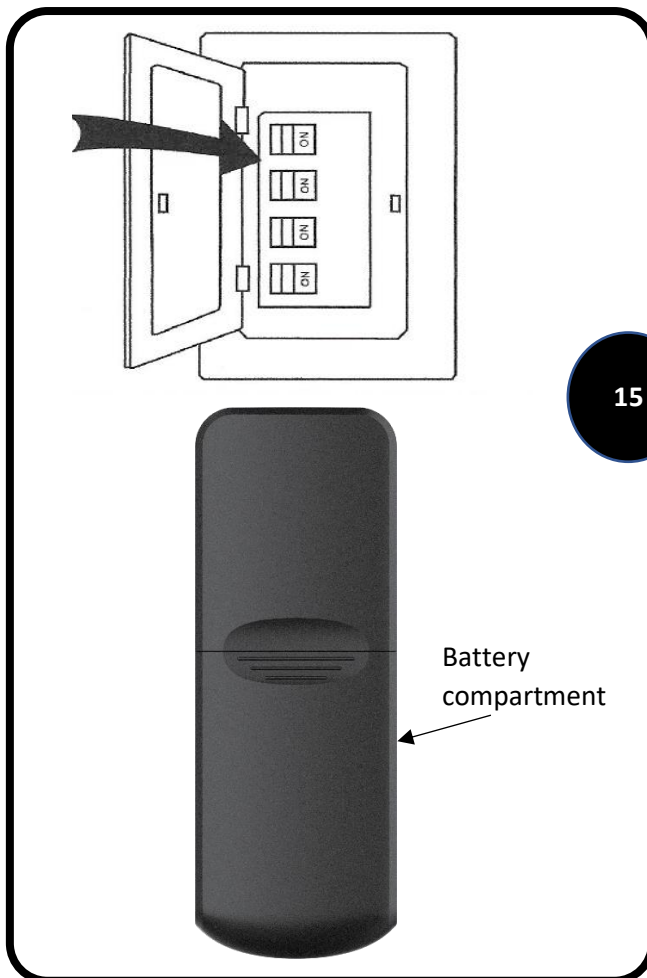

15

15. Restore the power to the main fuse or circuit breaker. Slide off the lower rear panel of the remote control to expose the battery compartment. Install the batteries (included) and slide the battery compartment back onto the remote.

Sit back, relax, and enjoy your Blue Mountain fan!