# **KOHLER**<sub>®</sub>

## Wellworth® Two-piece round-front toilet, dual-flush K-3987

### Features

- Two-piece design
- Round-front bowl offers an ideal solution for smaller bathrooms and powder rooms
- Left-hand nested trip lever offers a choice of 1.1 or 1.6 gallons per flush (gpf)
- 2-1/8" (54 mm) fully glazed trapway
- Coordinates with other products in the Wellworth collection
- Combination consists of the K-4197 bowl and the K-4458 tank
- Dual-flush technology allows you to choose between a full or partial flush
- Eligible for consumer rebates in some municipalities

### Installation

- Seat sold separately
- Standard 12" (305 mm) rough-in
- Three-bolt quick-connect installation

### **Recommended Products/Accessories**

K-5589 Purefresh® Deodorizing round-front toilet seat K-76923 PureWash® M250 Quiet-Close<sup>™</sup> round-front toilet seat with antimicrobial agent K-5420 Low-Profile Bolt Caps K-9237 Dual-flush Trip Lever 1023457 Wax Ring/Hardware Kit 1265114 Connector Hose K-23726 Drain treatment K-4639-RL Cachet® ReadyLatch® Quiet-Close<sup>™</sup> round-front toilet seat

### **Included Components**

K-4197 Round-front toilet bowl K-4458 Toilet tank, dual-flush





Codes/Standards ASME A112.19.2/CSA B45.1 EPA WaterSense®

# KOHLER® Toilets and Seats Limited Warranty

See website for detailed warranty information.

### Available Colors/Finishes

Color tiles intended for reference only.

### Color Code Description

0	White
0	vvinte


96 Biscuit

7 Black Black™





# Wellworth® Two-piece round-front toilet, dual-flush K-3987

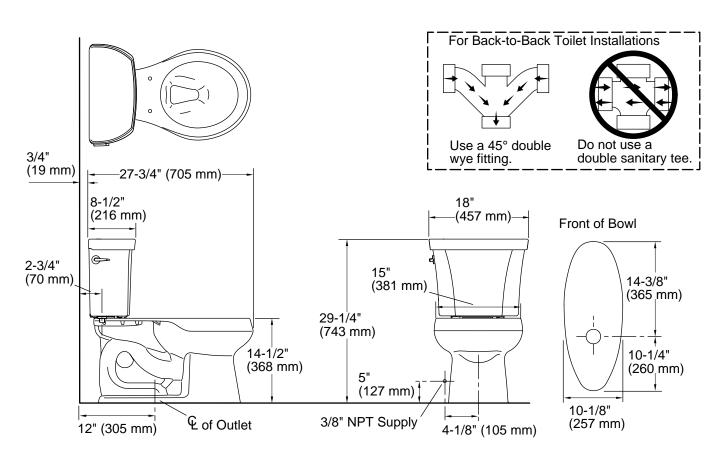

### **Technical Information**

All product dimensions are nominal.	
Toilet type:	Floor-mount
Waste Outlet:	Floor
Bowl shape:	Round-front
Flush type:	Class Five
Trap passageway:	2-1/8" (54 mm)
Water surface size:	10-1/2" x 7-3/4" (267 mm x 197 mm)
Rim to water	5-1/4" (133 mm)
surface:	
Rough-in:	12" (305 mm)
Seat-mounting	5-1/2" (140 mm)
holes:	

### Notes

Install this product according to the installation instructions.

For back-to-back toilet installations: Use only a 45° double wye fitting.

