
# **Sliding Door TV Stand w/Fireplace**

# **Assembly Instructions**




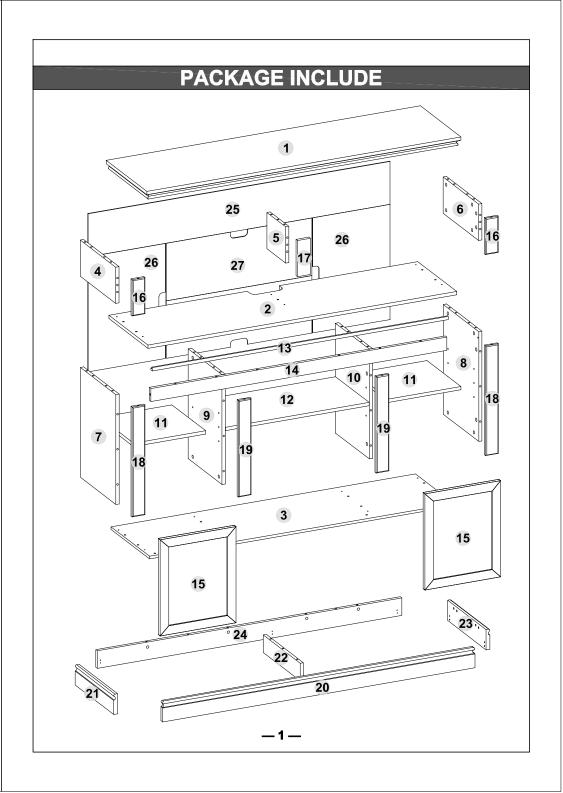


# PART IDENTICATION


CODE	DESRIPTION	QTY	
1	Top panel	1	
2	Middle shelf	1	
3	Bottom panel 1		
4	Upper Left side panel 1		
5	Upper partition panel	1	
6	Upper Right side panel	1	
7	Lower left side panel	1 1	
8	Lower right side panel	1	
9	Lower left partition panel	1	
10	Lower right partition panel	1	
11	Small adjustable shelf	2	
12	Large adjustable shelf 1		
13	Upper slide rail		
14	Upper front baffle	1	
15	Sliding door 2		
16	Upper front panel 2		
17	Upper middle panel 1		
18	Lower front panel	2	
19	Lower middle panel	2	
20	Bace front molding	1	
21	Bace left molding	1	
22	Bace support	1	
23	Bace right molding 1		
24	Bace back stretcher 1		
25	Upper back panel	1	
26	Side back panel	Side back panel 2	
27	Middle back panel	1	

PACKAGE CONTENT						
				Ø8x30MM	Ø	3.5x14MM
			Q		(4	
<b>A</b> 54x+1	В	54x+1	0	46x+1	O	8x+1
				<b>Ø1/4"x1</b> 2		
12x	<b>3</b>	8x	G	16x	0	6x
Ø3.0x12MM		M6x25			Ø	3.5x14MM
Follow						
<b>0</b> 24x	0	4x	K	4x	•	36x+1
				Ø1/4"x		
		00			6	000
M 1x	0	4x	0	8x	<b>P</b>	8x+1
<b>Q</b> 2x						
—3—						

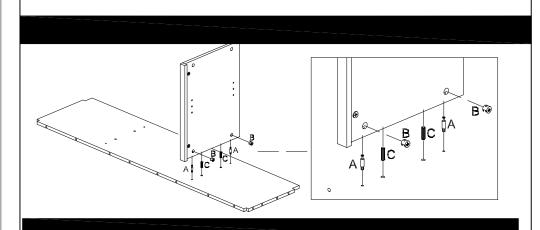


Insert the wood dowel [B] at least half way by tapping lightly with a rubber mallet, IF NECESSARY.






- 1. Screw the cam bolt [A] into the threaded insert on the panel.
- 2. Connect both panels together making sure cam bolt [A] goes into the pre-drilled large hole on the end of panel for cam lock [C].
- 3. Insert the cam lock [C] into the pre-drilled large hole on the panel. Make sure the cross slot of cam lock [C] faces out.
- 3. Rotate the cam lock [C] clockwise with a self-supplied phillips screwdriver to lock the cam bolt [A] in place.

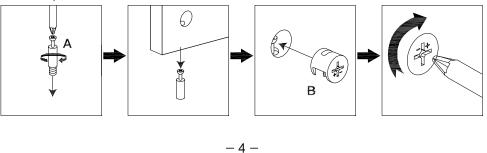

# You are now ready to assemble the TV Stand

# It is divided into three parts in total:


- 1. Install the base part Base
- 2. Install the middle part Body
- 3. Install the top part Top

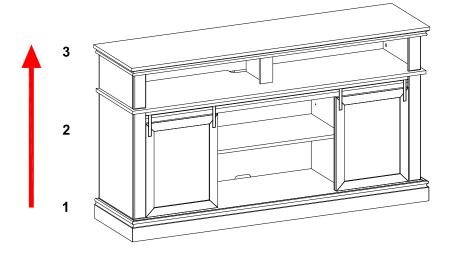

# Warm Tips:


Start the installation from the base to the top.








## PART 1 - start to assemble the base part


-Screw (G) &(F) to (3) as below shown

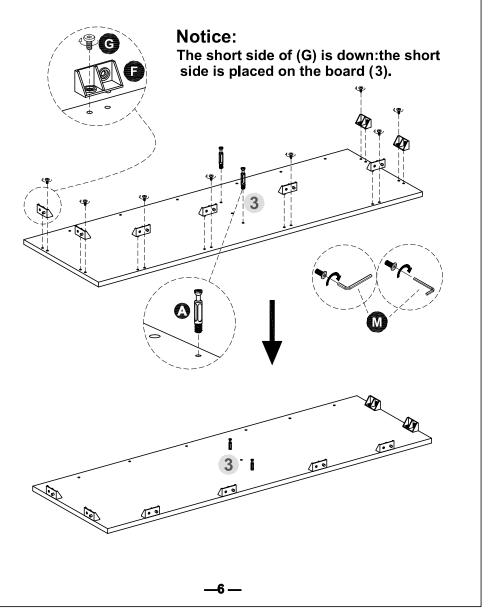


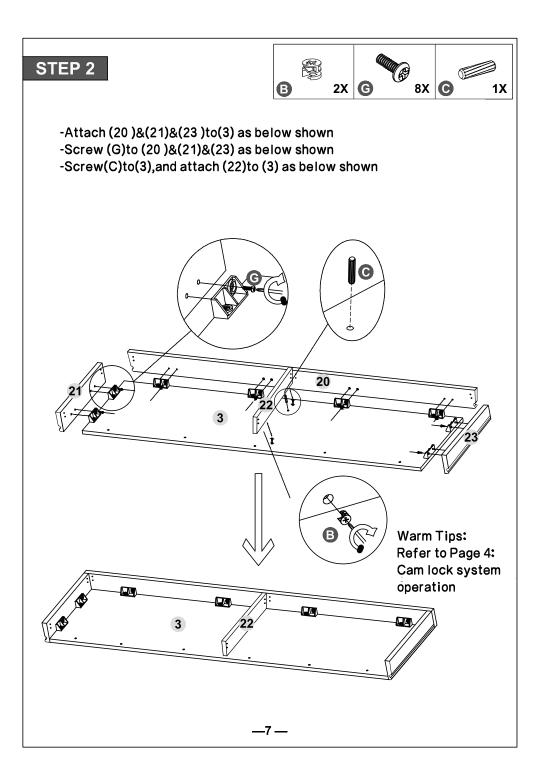

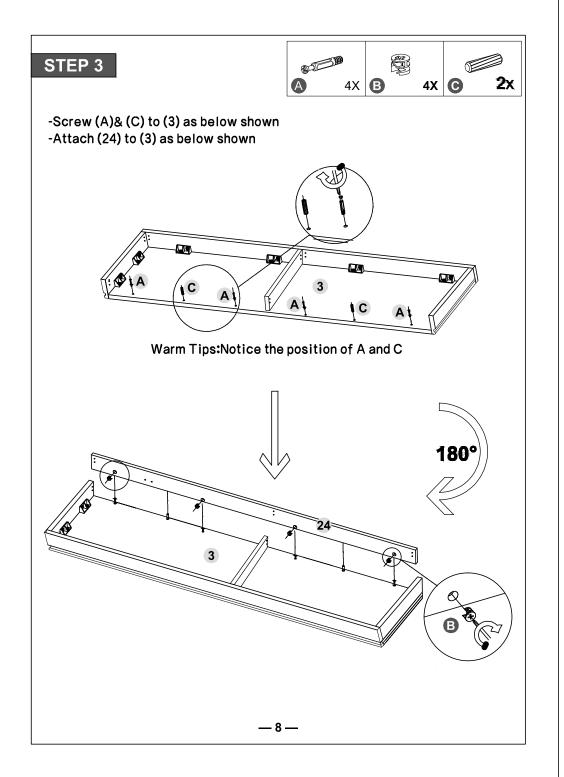

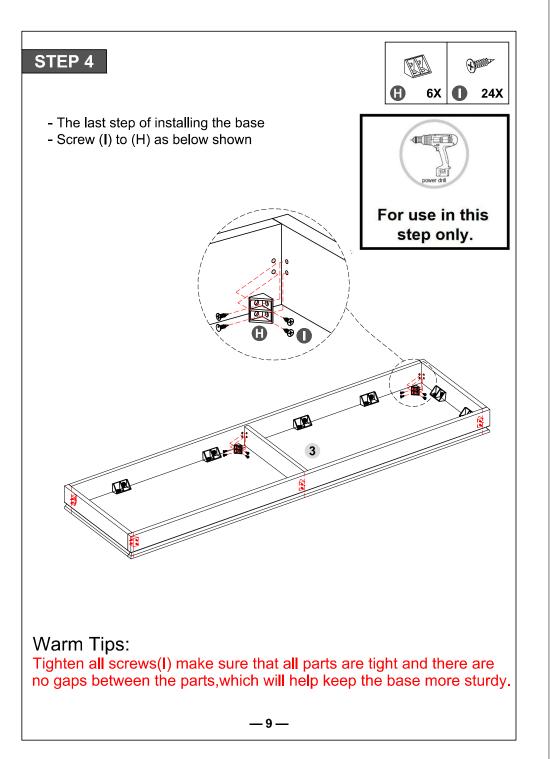

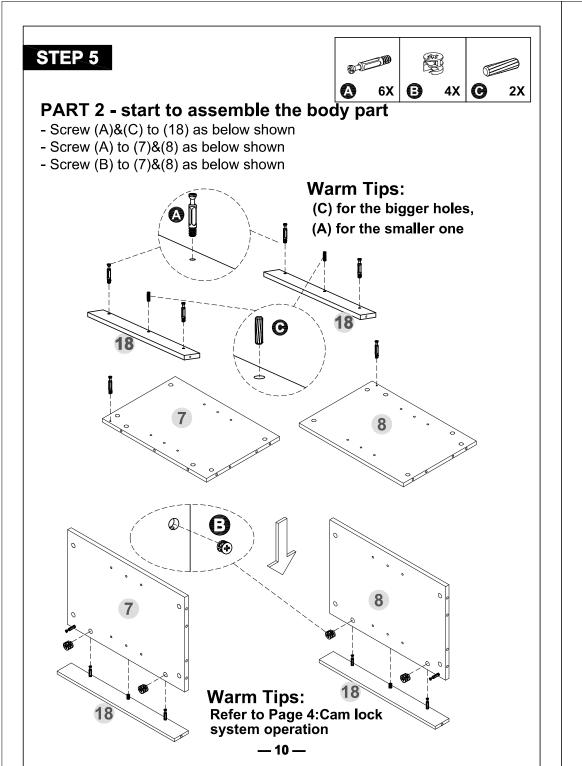

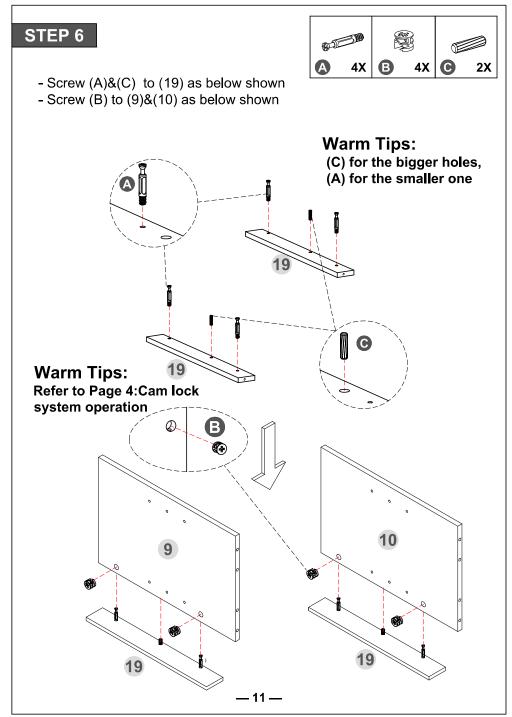





13




-Screw (J) to (13)&(14) as below shown

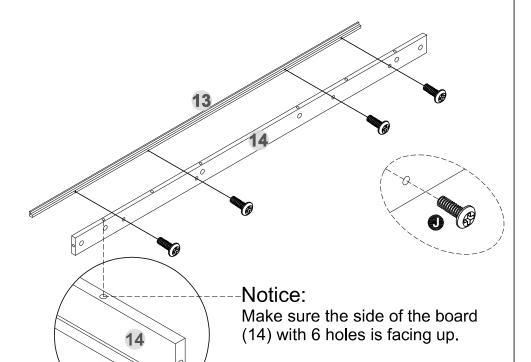



STEP 8





- -Screw (A) & (C) to (3) as below shown -Screw (B) to lock the (9)&(10) on the (3) as below shown

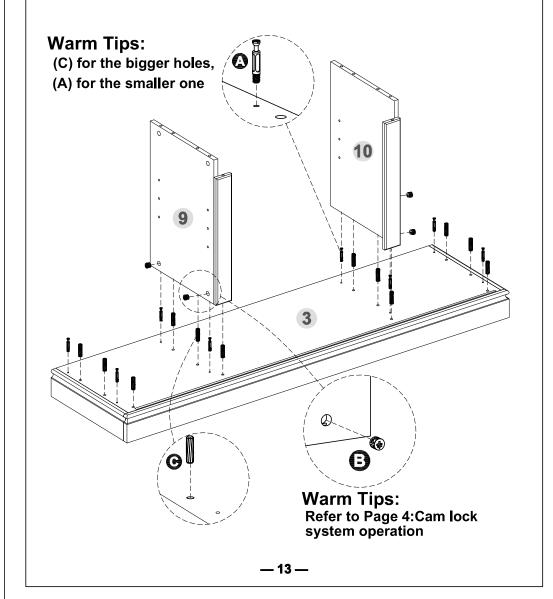


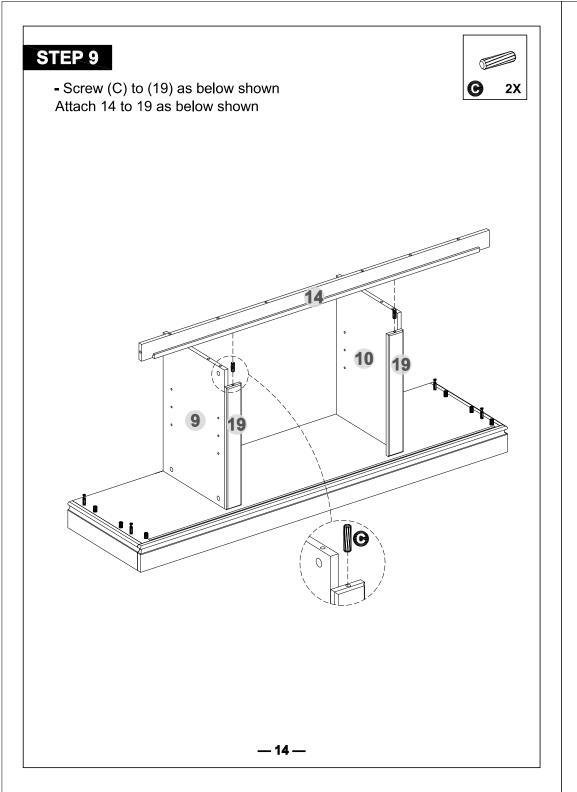


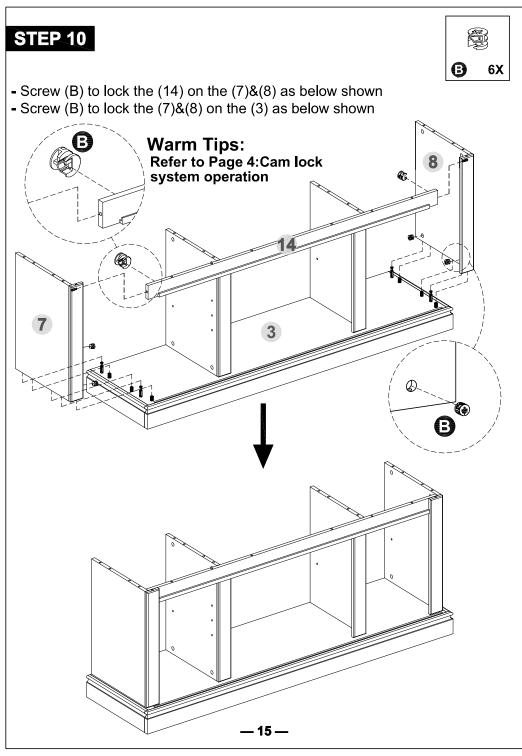

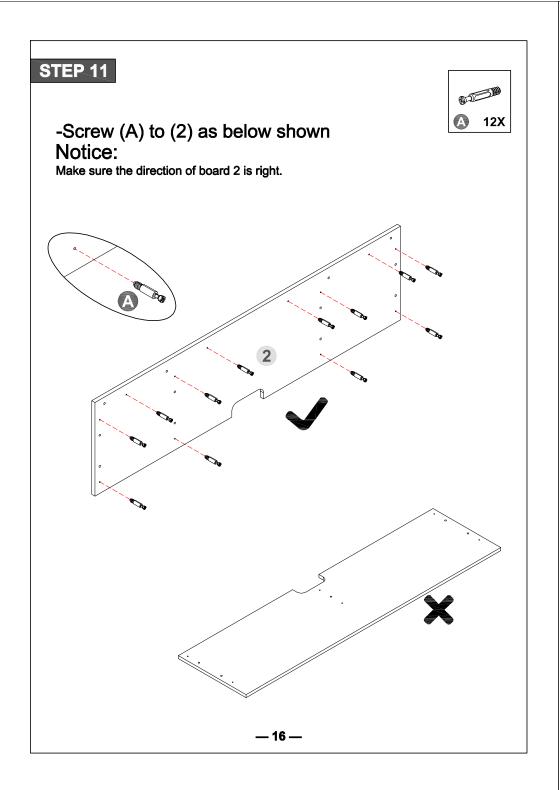


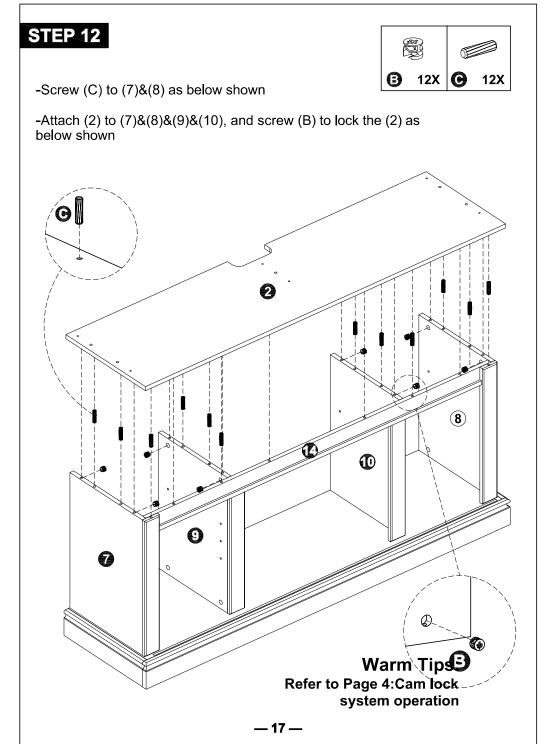

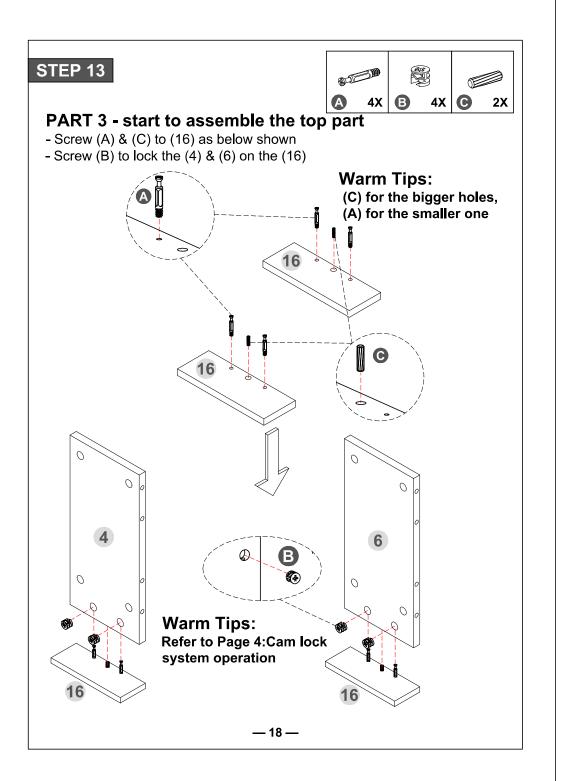


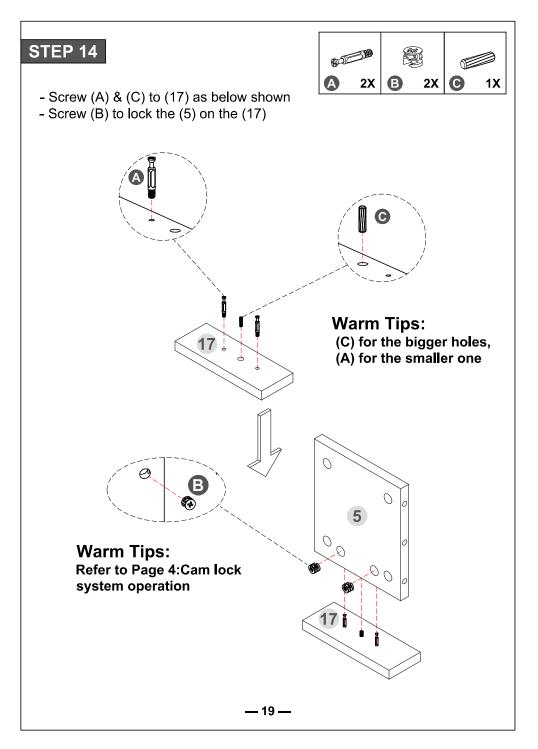

# STEP 15



-Screw (A)&(C) to (2) as below shown

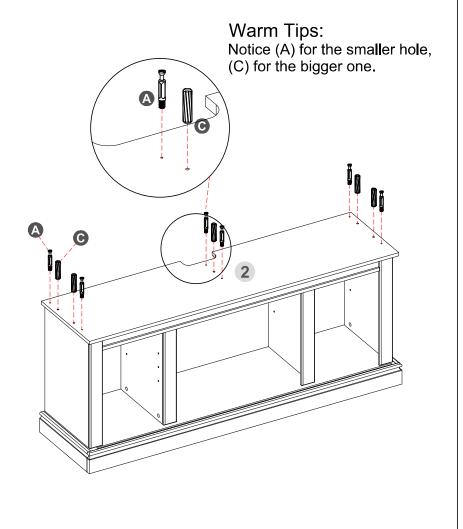


**— 20 —** 

# STEP 16



- -Attach (4) &(5)&(6) to (2) as below shown -Screw (B) to lock (4)& (5)& (6) as below shown


## **Warm Tips:** Refer to Page 4:Cam lock system operation

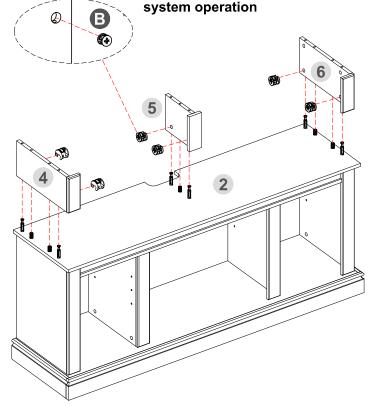






-Attach (A) to (1) as below shown

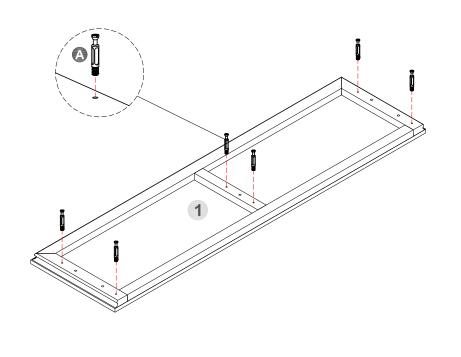

-22 -

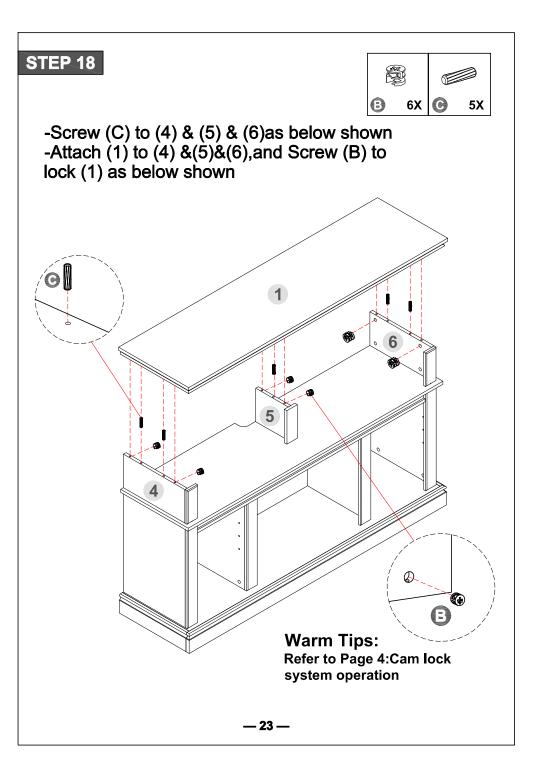

If you intended to use this product as a TV stand, continue the assembly instruction on page 24.

If you intended to use this product as a fireplace mantel, continue the assembly instruction on page 30.


## TV STAND ASSEMBLY

# STEP 19

-Screw (E) to (7) & (8)& (9)& (10) as below shown

-Put in (11)& (12) as below shown



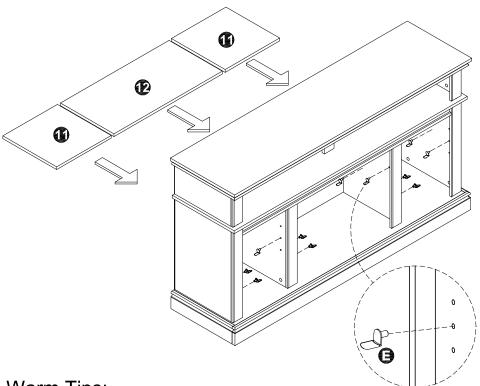


# Warm Tips:

Make sure to install (E) in place, otherwise there will be gaps, making it difficult to install (11)&(12).(E) is adjustable in 3 gears, and it must be installed at the same height.

# STEP 20


-Start to install the back panel



It is recommended to attach the back panel (25) at the top panel (1) first.then


36X


and then attach (26)-(27)-(26) from left to right. Please remember not to fully tighten all the screws (L) until all of them are in correct position.

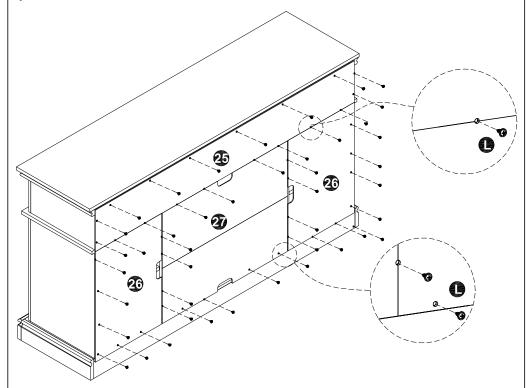



### Notice:

Make sure that the directions of (25),(26), (27) are right: The position with the small round hole is below. Tighten all screws make sure that all parts are tight and there are no gaps between the parts, which will help keep the TV stand more sturdy

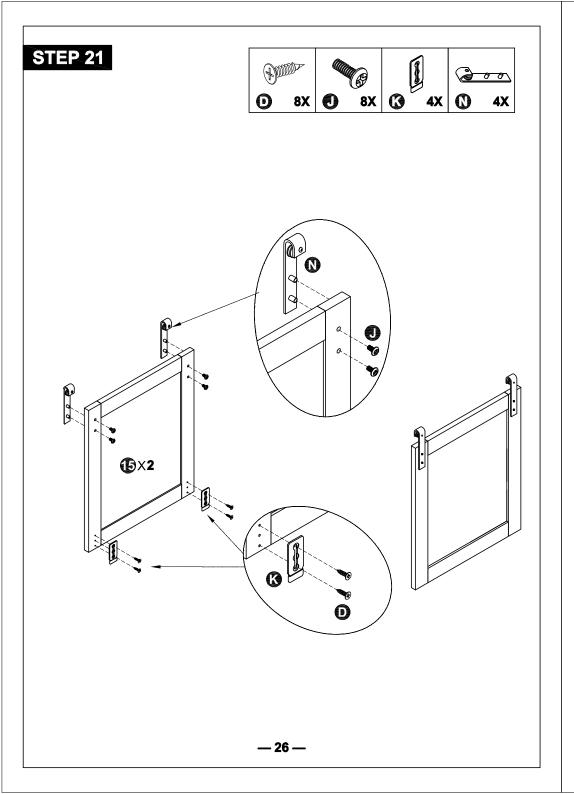

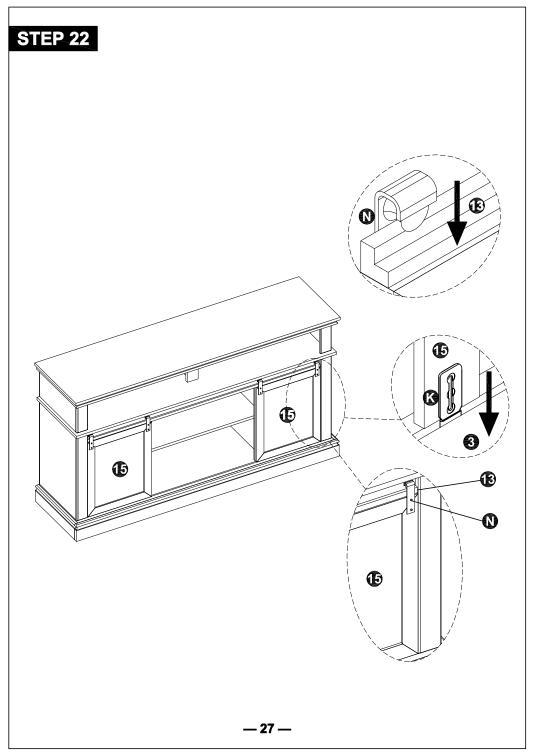

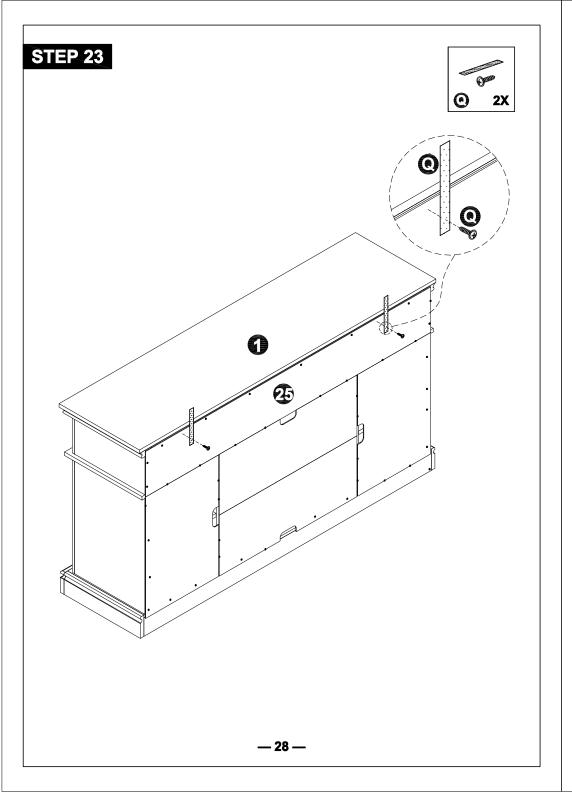


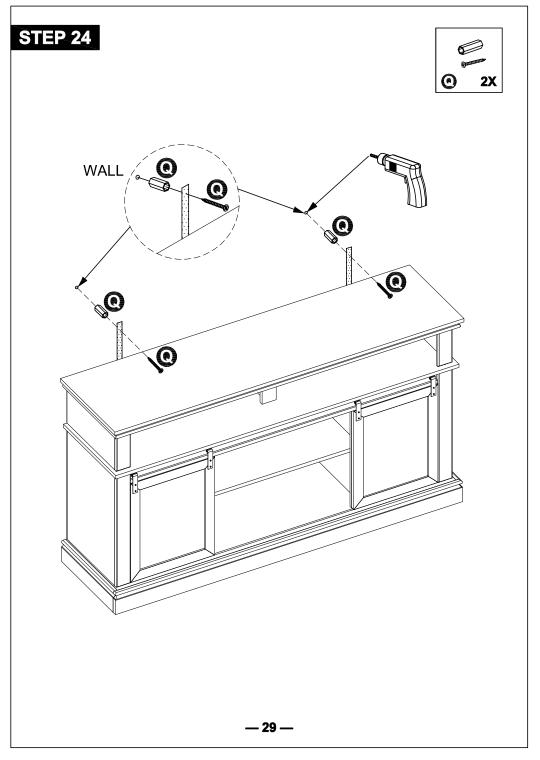


## FIREPLACE MANTEL ASSEMBLY

## STEP 19

-Screw (E) to (7) & (8)& (9)& (10) as below shown





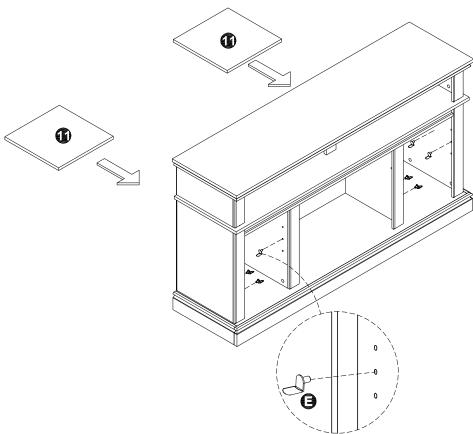

# Warm Tips:

Make sure to install (E) in place, otherwise there will be gaps, making it difficult to install (11).(E) is adjustable in 3 gears, and it must be installed at the same height.


# STEP 20



- -Start to install the back panel
- -Screw (L) to attach (25)&(26) as below shown Warm Tips:


It is recommended to attach the back panel (25) at the top panel (1) first.then


and then attach (26) from left to right. Please remember not to fully tighten all the screws (L) until all of them are in correct position.

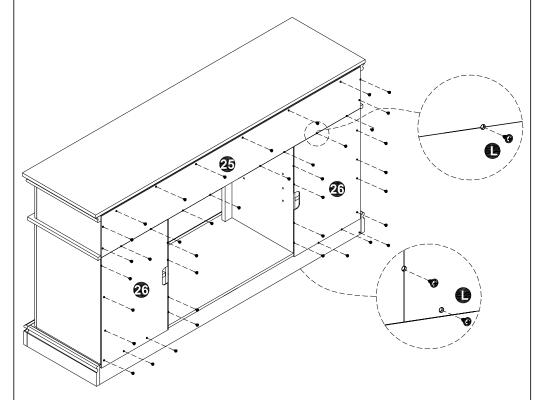



### Notice:


Make sure that the directions of (25),(26) are right: The position with the small round hole is below. Tighten all screws make sure that all parts are tight and there are no gaps between the parts, which will help keep the TV stand more sturdy

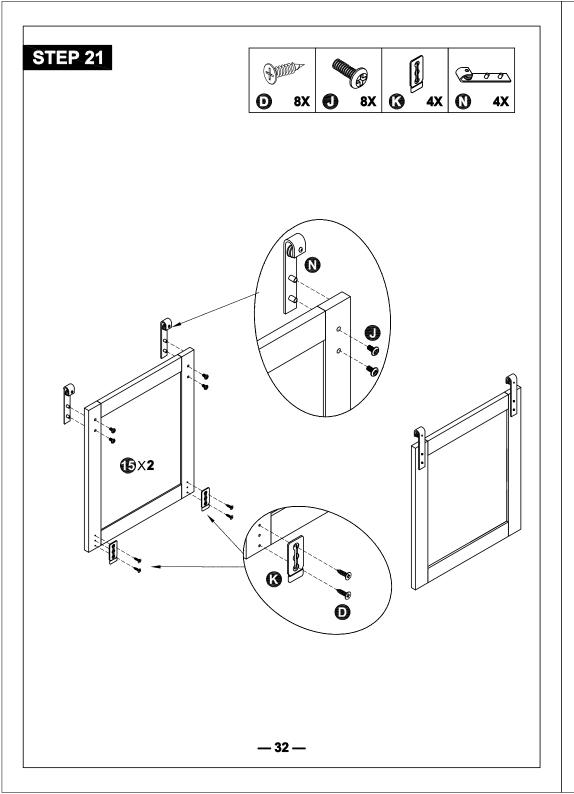

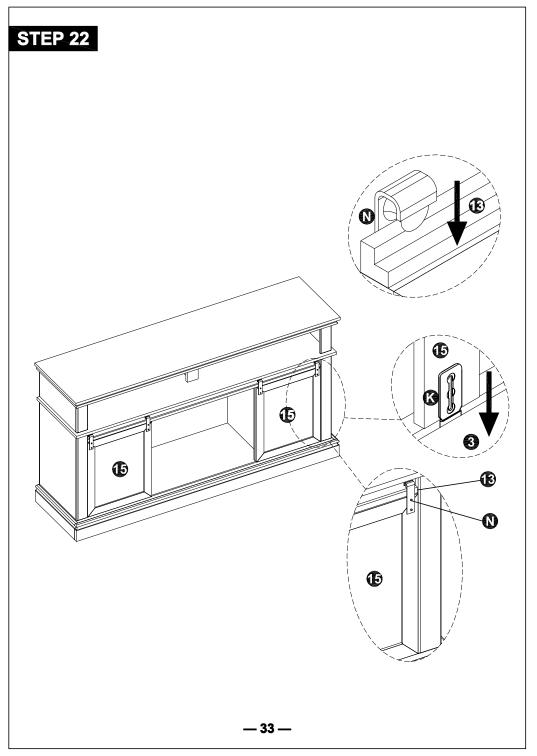

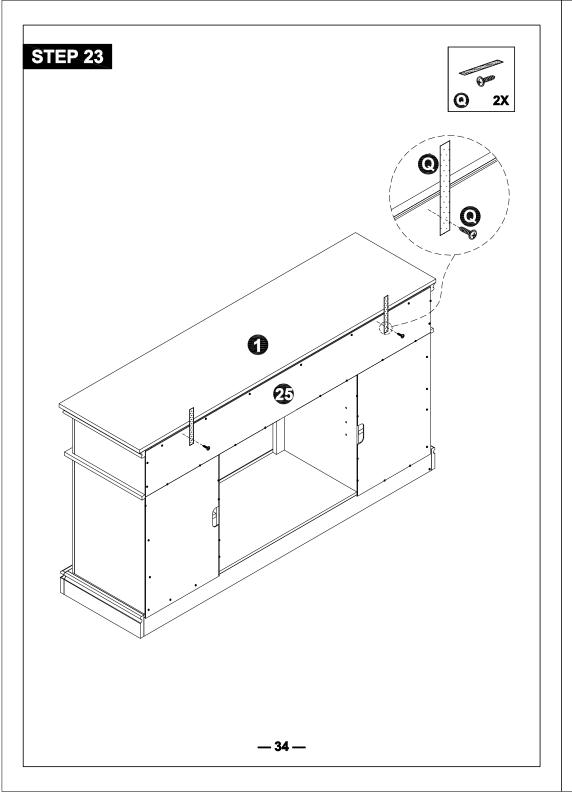

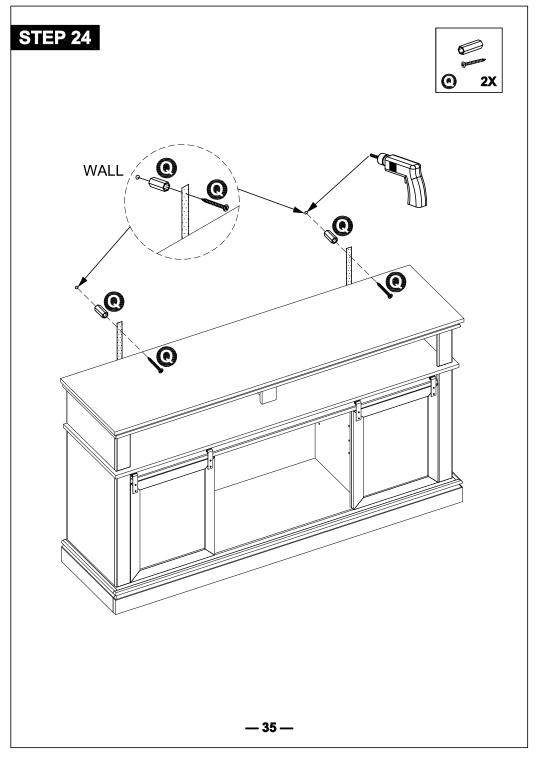

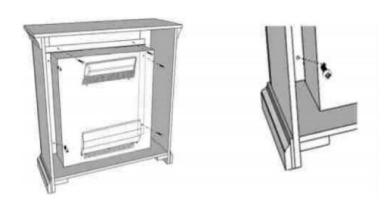


### FIREPLACE INSTALLATION

If you decide to install the fireplace into the mantel, carefully set the unit from the back of the mantel and center it in the opening.

Check the alignment and attach the unit to the mantel by inserting screws through the drilled holes on the trim to the mantel.

NOTE: Do not attempt to install the unit from the front of the mantel. It will not fit.



# 23" Insert Fireplace Heater

## **TABLE OF CONTENTS**

Safety Information	03
Technical Specification	04
Package Content	04
Assembly Instruction	05
Users Instruction	07
Control Panel	30
Remote Control	10
Care and Maintenance	11
Trouble Shooting	11

When using electrical appliances, basic safety precautions should always be followed including the following:

#### READ ALL INSTRUCTIONS BEFORE USE AND SAVE THESE INSTRUCTIONS

- Read all instructions before using this heater.
- 2. Do not use this heater outdoors.
- This heater is not intended for use in bathrooms, laundry areas and similar indoor locations. Never locate the heater where it may fall into a bathtub or other water container.
- 4. Do not run the power cord under carpeting. Do not cover the power cord with throw rugs, runners, or the like. Arrange the power cord away from traffic areas and where it will not be tripped over.
- 5. To disconnect the heater, turn controls to off, then remove the plug from the outlet.
- Connect to properly grounded outlet only. Always plug heaters directly into a wall outlet/receptacle. Never use with an extension cord or reloadable power tap (outlet/power strip).
- To prevent a possible fire, do not block operate the firebox on soft surfaces, like a bed, where openings may become blocked.
- There is a thermostat limiter inside the heater. When the inner temperature overheat or abnormal heating occurs, the thermostat protective device cuts off the power supply to avoid fireplace from damaged or risk of fire.
- Use the heater only as described in the manual. Any other use not recommended by the manufacturer may cause fire, electrical shock, or injury to persons.
- 10. WARNING: Manufacturer and seller expressly disclaim any and all liability for personal injury, property damage or loss, whether direct, indirect, or incidental, resulting from the incorrect attachment, improper use, inadequate maintenance, unapproved modification, or neglect of this product.

⚠ WARNING: There is no user serviceable parts inside fireplace/heater. If the unit appears to malfunction, turn the unit off and unplug from the wall immediately and contact Customer Service.

⚠ WARNING: This heater is hot when in use. To avoid burns, do not let bare skin touch hot surfaces. If provided, use handles when moving thos heater. Keep combustible material, such as furniture, pillows, bedding, papers, clothes, and curtains at least 3ft (0.9m) from the front of the heater and keep them away from the side or rear.

⚠ WARNING: Extreme caution is necessary when any heater is used by or near children or invalids and whenever the heater is left operating and unattended.


⚠ WARNING: Do not operate any heater with a damaged cord or plug or after the heater malfunctions, has been dropped, or damaged in any manner. Return the heater to an authorized service facility for examination, electrical or mechanical adjustment, or repair.

⚠ CAUTION: While the heater is in use, the top center of the fireplace can get hot to the touch, and may cause serious injury or burns. Always supervise small children around the fireplace/heater. Do not place any cloth or decorations over the heater outlet or fireplace, or otherwise obstruct the heater outlet of the fireplace, as this may cause a fire and serious injury.


### **TECHNICAL SPECIFICATION**

Model Number	JC-2301EA		
Dimensions (W x D x H)	23" x 5.15" x 17.1"		
Net Weight	17. 6 lb		
Gross Weight	19. 8 lb		
Power Rating	1400 W		
Voltage	120 V		
Frequency	60 Hz		

## **PACKAGE CONTENT**

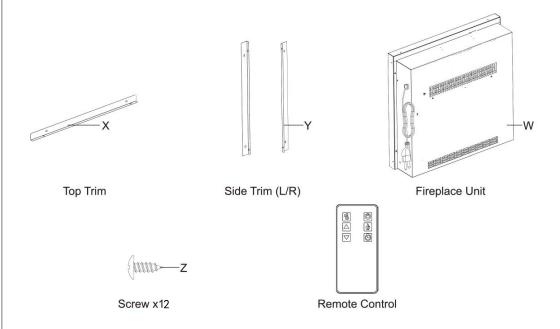

## **ASSEMBLY INSTRUCTION**



### STEP 1

Take out the unit from the box and layout all the spare parts for easy assembly. Make sure all small items are not left in packaging materials.

## **A** CAUTION

 This unit has a glass front panel. Use extreme caution when handling glass to prevent personal injury or damage.

#### STEP 2

Attach the top trim to the top of the unit and secure it by tightening 2 screws. Make sure the right angle side faces toward the front of the unit.

Align and attach two side trims to the sides of the fireplace unit. Identify the right and the left and make sure the right angle side is faces toward the front of the unit.





#### STEP 3

Carefully set the unit from the back of the mantel and center it in the opening.

Check the alignment and attach the unit to the mantel by inserting screws through the drilled holes on the trim to the mantel.

NOTE: Do not attempt to install the unit from the front of the mantel. It will not fit.

### **USER INSTRUCTION**

#### Before use

Check that the air intake and exhaust is not covered or obstructed in anyway.

Keep combustible objects at least 3ft away from the unit.

Plug the unit to a grounded power socket.


### Grounding


This product must be grounded. If it should malfunction or breakdown, grounding provides a path of least resistance for electric current to reduce the risk of electric shock.

This unit comes standard with a 6ft (1.8m) long, three wired cord. Always plug the unit into a wall outlet. An extension or relocate tab should never be used.


## **A CAUTION / WARNING**

- Improper connection of the equipment grounding conductor can result in a risk of electric shock. Check with a qualified electrician or serviceman if you are in doubt as to whether the product is properly grounded.
- DO NOT modify the plug provided with the product nor using any bypass device
  if the plug does not fit the outlet. Have a proper outlet installed by a qualified
  electrician.





## **USER INSTRUCTION (CONTROL PANEL)**

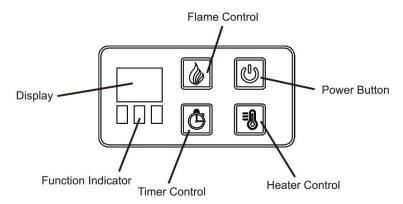

#### **Control Panel**

The control panel is located on the top right corner of the unit.

#### Power ON / OFF

Press the power button to turn on the unit. Press again to turn off the unit.

NOTE: There is a thermostat limiter inside the unit. When the inner temperature is too hot, the unit will automatically turned off to avoid damage to the product or risk of fire.

## **A CAUTION / WARNING**

DO NOT unplug the unit when it is still "ON"

#### Flame Control

Press the flame control button to rotate and set flame effect levels. The flame setting are as follows

Button Press	Flame Level	Display Value	Fireplace Appearance
1st Press	High	L3	Highest flame, logs glow
2nd Press	Medium	L2	Medium flame, logs glow
3rd Press	Low	L1	Low flame, logs glow
4th Press	OFF	None	OFF

NOTE: When the heater is turn on, the flame effect level can only rotate and set between High, Medium, and Low.

#### **Heater Control**

Press the heater control to turn on and off the heater.

When the heater is turned on, press and hold the heater control button for 5 seconds to enter temperature adjustment mode. The LED indicator is red. In adjustment mode, the display will flashes. There are 22 levels to change Fahrenheit temperature (ON, 62°F - 82°F). After this is set, the display will flash 5 times and exit from setting status.

To switch from degree Fahrenheit to degree Celsius, press and hold the power button for 5 seconds when the heater is turned on. The LED indicator will turn to green. There are 12 levels to change Celsius temperature (ON, 17°C - 27°C). Repeat the same process to convert Celsius to Fahrenheit.

NOTE: Degree Fahrenheit will be displayed in RED and degree Celsius will be displayed in Green.

#### **Timer Control**

Press the timer button to turn the timer on. The timer function can controls both the flame effect and heater.

The timer can set as the table suggested below


Button Press	Timer Interval	Display	
1st press	30 Minutes	30	
2nd press	1 Hour	1h	
3rd press	2 Hours	2h	
4th press	3 Hours	3h	
5th press	4 Hours	4h	
6th press	5 Hours	5h	
7th press	6 Hours	6h	
8th press	OFF	None	

NOTE: Timer only controls heater if only the heater is on before timer is set.

NOTE: Timer only controls flame effect function if only the flame effect function is on before timer is set.

NOTE: Timer can control both heater and flame effect function if both are on before timer is set

## **USER INSTRUCTION (REMOTE CONTROL)**



#### Remote Control

The operation of the remote control buttons work the same as the button on the control panel. NOTE: The remote control cannot be used to switch between degree Fahrenheit and degree Celsius.

#### Install / Replace Battery


The remote control is provided with a CR2025 battery. Remove the plastic insulating sheet before using.


To replace or remove old battery, push in the clip and pull the battery bracket out simultaneously.

Insert a new battery with the button side into the battery bracket, make sure the battery is firmly seated.

To replace the bracket, simply push it into the remote control. Make sure the bracket snaps into position.

NOTE: Remove battery from remote control if not use for an extended period of time.





## **A CAUTION / WARNING**

- Dispose old / used battery at a suitable recycling point or according to local regulations.
- · DO NOT ingest battery. If accidentally swallowed, seek for medical help immediately.

### **CARE AND MAINTENANCE**

#### Cleaning the unit:

Always turn off and unplug the unit from power outlet before cleaning.

Allow the unit to cool down completely before performing any maintenance or cleaning.

Use a vacuum cleaner or duster to regularly remove any accumulated dust on the unit

Use a damp soft cloth to clean the surface and buff with a dry cloth.

Do not use abrasive cleansers, liquid sprays or any cleaner that could scratch the surface.

### TROUBLE SHOOTING

Problem	Solution
The unit does not turn on	Make sure the unit is plugged into a standard 120V grounded power source. Press the power button on the control panel.
Flame effect is on, but there is no flame effect	Open the top and back panel to check if the flame spindle has fallen off from the spindle motor.
The heater does not blow warm air	Make sure the set temperature is higher than the room temperature.
The heater does not work	Turn all switches to OFF and unplug the unit for 5 minutes. Plug the unit back to power and operate as normal.
Error Code EE shown on the indicator	Please contact customer service.
Remote control does not work	Use it closer to the unit / change battery / remove insulating plastic sheet.

10