

# QUOIZEL

6 CORPORATE PARKWAY  
GOOSE CREEK, SC. 29445  
www.quoizel.com

Quoizel, Inc.  
6 Corporate Parkway  
Goose Creek, SC 29445

Customer Service  
Phone 631.273.2700  
Fax 631.231.7102  
www.quoizel.com

## Assembly Instruction Sheet #IS-OZ1713 For Styles OZ1713PN, OZ1713C and OZ1713IN

**Tools Required:** Flathead screwdriver, Phillips screwdriver, pliers, wire cutters, wire strippers, electrical tape, safety glasses.

**Bulb Recommended:** (2) Medium Base 100W Maximum, Alternate bulb (2) 23W CFL

**Estimated Assembly Time:** 30-45 minutes

**Preparation:** Identify and inspect all parts before beginning installation. Check package content list and diagrams below to be sure all parts are present. If any parts are missing or damaged, do not attempt to assemble, install, or operate the fixture. Contact customer service for replacement parts.


### ⚠ Warnings and Cautions

Turn off electricity at circuit breaker or main fuse box before installation. Consult a licensed electrician if in doubt.



These instructions are provided for your safety. It is very important you read them completely before installing the fixture. We strongly recommend that a licensed, professional electrician perform the installation.

Disconnect fixture from power source before replacing bulbs. Make sure bulbs are given sufficient time to cool before removal. Do not subject glass parts to any shock while in operation or shattering may result.

### Package Contents

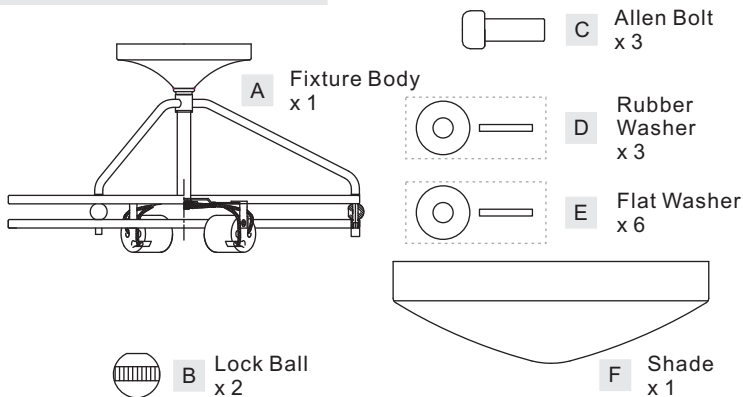

### Hardware Contents

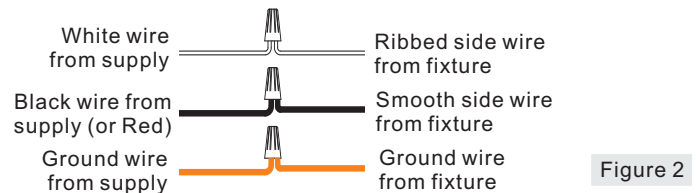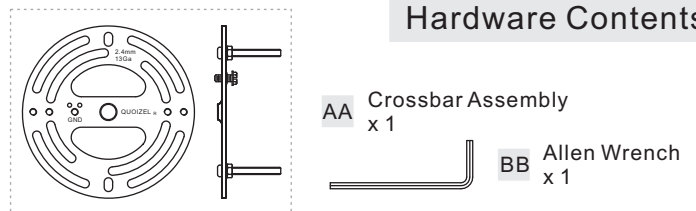

### STEP 1 - Install Crossbar

- A. Attach the Crossbar Assembly (AA) to the Outlet Box with the head of the Green Ground Screw facing you. Secure it with Outlet Box Screws (not included). Tighten until snug.

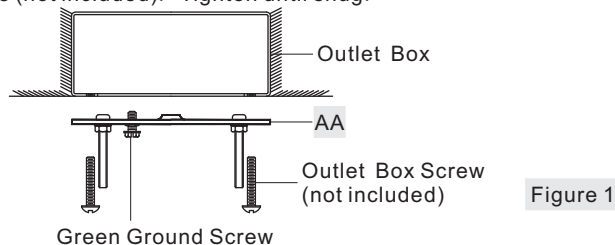


Figure 1

### STEP 2 - Wire Connections

- A. Use standard wire connectors (not included) to make all wire connections. (Connectors are not included with fixture.) Strip and prepare wire ends according to instructions supplied with connectors.  
B. Connect White Supply Wire from the Outlet Box to Ribbed side Wire from fixture.  
C. Connect Black (or Red) Supply Wire from the Outlet Box to Smooth side Wire from fixture.  
D. Connect Ground Wire from the Outlet Box to Ground Wire from fixture.  
E. Twist connectors until wires are tightly joined together.  
F. Wrap each connection with approved electrical tape and carefully stuff all the connected wires into the Outlet Box.

### STEP 3 - Attach Fixture Body to Mounting Screw

- A. Place the Ceiling Canopy of the Fixture Body (A) over the Mounting Screws and secure with Lock Ball (B). Hand tighten until snug.

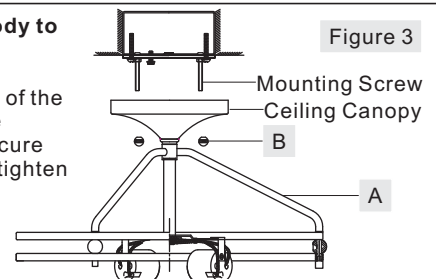


Figure 3

### STEP 4 - Install Shade

- A. Place the Rubber Washer (D) and Flat Washers (E) over the Allen Bolt (C).  
B. Place the Shade (F) into the shade holder, line up the holes on the side of the Shade (F) and the mounting holes on the Ball. Pass the Allen Bolts (C) with washers (D/E) through the holes on the Shade (F), thread into the mounting holes on the Balls by using the Allen Wrench (BB). Please make sure that the Allen Bolts (C) don't penetrate opening of the Ball, this will allow the support arms to pass through the Ball to attach the Shade (F) to the Fixture Body (A).

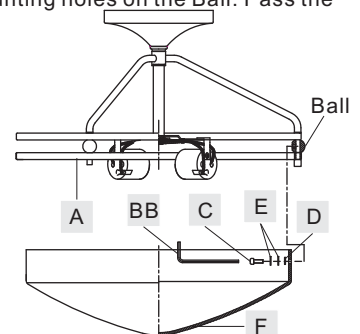


Figure 4

Thank you for purchasing a Quoizel product.  
Need assistance with parts or assembly? Call Quoizel customer service at 1-631-273-2700  
or visit us on-line at [www.quoizel.com](http://www.quoizel.com)

**STEP 5 - Install Bulb**

- A. This fixture uses standard bulb with a medium screw base.  
Maximum 100 watts.
- B. Insert bulb and screw snugly into place.

Your fixture is now assembled and ready to use. Enjoy!



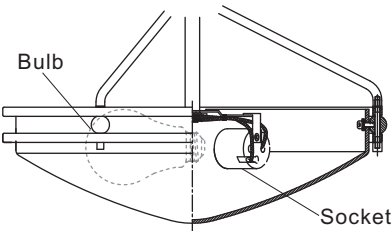


Figure 6

OZ1713PN/OZ1713C/OZ1713IN

FINISH: PALLADIAN BRONZE  
/POLISHED CHROME  
/IRON GATE

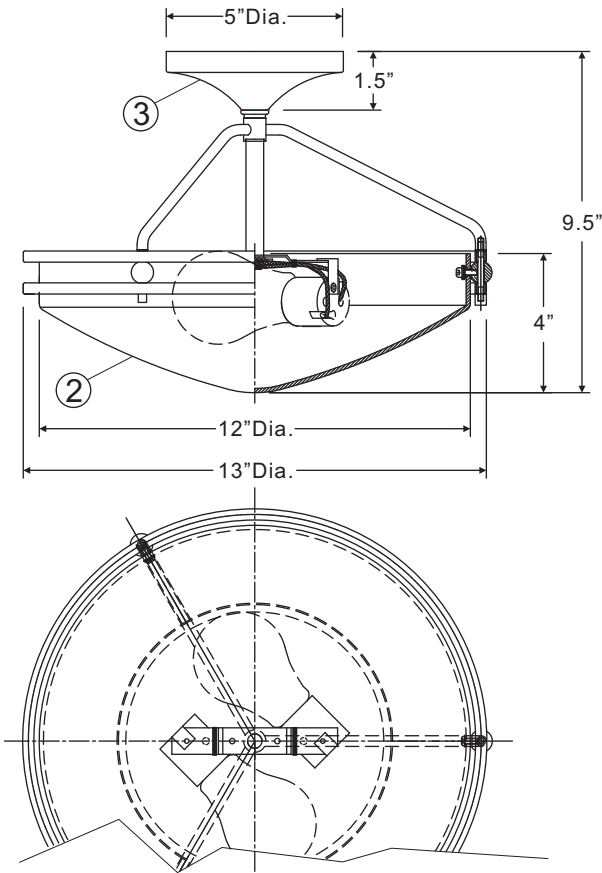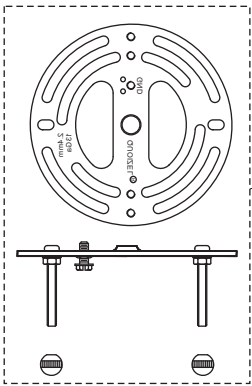

(2) 100W Medium  
Base Bulbs  
(Not Supplied)

NOTE: ALL DIMENSIONS ARE ROUNDED UP TO THE NEAREST 1/2"

| NO. | PART NUMBER | REPLACEMENT PART DESCRIPTION           | REQ. | ITEM NUMBER |
|-----|-------------|----------------------------------------|------|-------------|
| 1   | 8598KIT     | KIT POLISHED CHROME HARDWARE           | 1    | OZ1713C     |
| 2   | G2236SH     | SHADE ETCHED PAINTED WHITE INSIDE 12"D | 1    |             |
| 1   | 9194KIT     | MOUNTING HARDWARE IRON GATE 4"D        | 1    | OZ1713IN    |
| 2   | G2236SH     | SHADE ETCHED PAINTED WHITE INSIDE 12"D | 1    |             |
| 3   | 11713INOZ   | BASE IRON GATE OZ1713IN                | 1    |             |

Thank you for purchasing a Quoizel product.  
Need assistance with parts or assembly? Call Quoizel customer service at 1-631-273-2700  
or visit us on-line at [www.quoizel.com](http://www.quoizel.com)