

NXTIAOO SERIES FIBERGLASS STEP LADDER



DURABILITY AND PERFORMANCE

- LOCKTOP[™] ladder top designed for safety, efficiency and productivity with steel plate for magnetic tools and 3 anchor points
- EDGE360[™] Bracing designed for drop protection, stability and slip resistance
- High visibility yellow tops and feet improve visibility and signal safety across the jobsite



#I PRO LADDER CHOSEN BY THE PROS THAT KNOW



Heavy duty spreaders and knee braces on every step for maximum durability



EDGE360[™] Bracing designed for drop protection, stability and slip resistance




LOCKTOP[™] ladder top safely holds I6 tools & is LOCK-IN[™] accessory compatible



NXTIAOO SERIES FIBERGLASS STEP LADDER



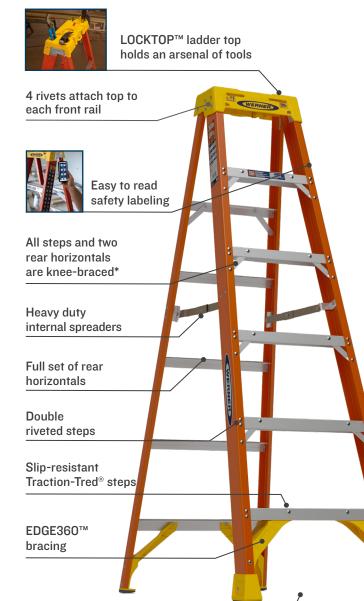

Wide stance for stability





Non-conductive side rails for working near electricity



*Number of rear horizontal braces varies by model **Assumes a 5'7" person with vertical 12" reach



EXPERIENCE LOCKTOP™ LADDER TOP

- O Paint Tray Inserts
- 02 Parts Bin
- **03** Screwdriver Slots (2)
- 04 Paint Can Holder
- **05** Anchor Points (3)
- 06 Paint Can Hook
- 07 Impact Driver Slot

- **OB** Werner LOCK-IN[™] Accessory
- (Hang variety of tools with power tool belt clip)
- (D) Small Tool Holder (Holds multi-purpose screwdriver or wrench)
- II Steel Plate for Magnetic Accessories (Hang magnetic lights, laser levels, etc)
- Permanent Duty Rating

FEATURES

- · High-visibility ladder top signals safety
- · High-visibility feet to prevent kicks and trips
- · Safety labels enhance safety practices
- · Load capacity molded into top for permanent marking

SPECIFICATIONS

MODEL NO.	SIZE	approximate Width	APPROXIMATE SPREAD	AVERAGE REACH HEIGHT**	APPROXIMATE Shipping Weight (LBS)	
NXT1A04	4′	19-7/8″	29″	8′ 5″	16 lbs	
NXT1A06	6′	23-3/8″	41-1/4"	10' 4"	22 lbs	
NXT1A08	8′	26-7/8″	53-3/8″	12' 3"	30 lbs	
NXT1A10	10′	30-3/8"	65-7/8″	14' 2"	39 lbs	
NXT1A12	12'	33-7/8″	78-1/4″	16′ 1″	48 lbs	

WERNER CO. CORPORATE HEADQUARTERS: 555 PIERCE RD., SUITE 300, ITASCA, IL 60143 TEL: (888) 523-3371 FAX: (888) 456-8459 WERNERCO.COM