CARE AND MAINTENANCE

Always use felt pads under all articles to prevent discoloration or softening of the lacquer. Plastic and rubber bases on items can discolor wood. Wipe up spills immediately and avoid common hazards such as hot dishes, harsh solvents and abrasives. Cleaning should be done with a soft lint free cotton cloth dampened with water or furniture polish. On highly used surfaces we recommend applying a quality paste wax which should be used on a regular basis to provide additional protection from sratches and spills. How often you apply the wax depends on how much wear the furniture receives.

NOTICE

- * Please make sure that you have all parts indicated before you begin assembly of this item
- * This item should be assembled on a soft surface to prevent scratching the finish during assembly
- * This item may require periodic tightening

Part List and Hardware List

| PIECE | DESCRIPTION | PICTURE | QUANTITY |
|-------|--------------|---------|----------|
| А | SEAT PART | | 1X |
| В | BACK REST | | 1X |
| С | FRONT LEGS | 1 | 2X |
| D | SCREWS | | 6X |
| Е | RING | 0 | 6X |
| F | BLACK FABRIC | | 1X |
| G | SPANNER | 68 | 1X |



Model # SEA8013

Product Dimensions: 18.1"W x 23.2"D x 40.1"H




PREPARATION

Before beginning assembly of product, make sure all parts are present. Compare parts with package contents list and hardware contents list.

If any part is missing or damaged, do not attempt to assemble the product.


Estimated Assembly Time: 10 minutes.



B D+E

Step 1
Take all the packaging off the item.
Take the two front Legs (C) and screw them on the Seat Part. (A)

Step 2
Take the Back Part (B) and joined with the Seat Part (A) and screw it

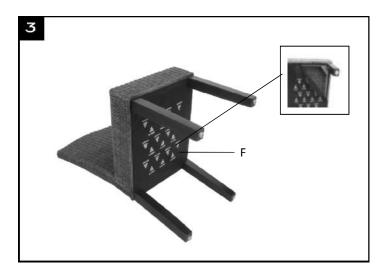

Step 3
Take the Black Fabric (F) and fix at the bottom of the chair with the velcrow