

Models



ITD60 ABS model



ITD51 PVC model



TOTAL 1
ITD365 2-in-1 ABS/PVC model

ITEM #	DESCRIPTION	BARCODE 7 75439	CTN QTY
ITD60	1pc ABS ISLAND TUB DRAIN® w/ABS Adaptor Kit and Reducing Bushing	04073 5	10
ITD51	1pc PVC ISLAND TUB DRAIN® w/PVC Adaptor Kit and Reducing Bushing	04074 2	10
ITD365	Total 1™ 2-in-1 ISLAND TUB DRAIN® w/ABS and PVC Adaptor Kit and Reducing Bushings	04075 9	10

Each kit includes

- Island Tub Drain® assembly
 - Flanged Brass Tailpiece w/Nut & Washer and Lubricant. Other tailpieces available from +osb™
 - ABS or PVC Adapter Kit (Total 1™ model includes both). Attaches to ABS or PVC Bath Wastes
- 2” x 1-1/2” ABS or PVC Reducing Bushing (Total 1™ model includes both)
 - Removable Mortar/Debris Guard
 - Cutting template

To see our videos:



www.youtube.com/c/osbplumbing




Scan the QR Code

Introducing the Redesigned ITD®

Our original Island Tub Drain® was groundbreaking, creating a new category and setting the industry benchmark for freestanding tub drains.

Still 100% engineered and manufactured in Canada, the newest addition to our ITD® range of products resets the benchmark with it’s new 1 piece design and category leading features.

and done.

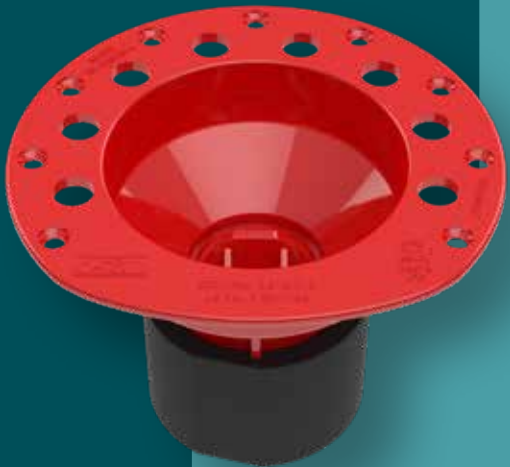

Rough-in a Freestanding Tub in advance... Install a Freestanding Tub in minutes.

When installed at rough-in, the Island Tub Drain® provides a simple connection between the P-trap and tub from above the floor - eliminating the need for access from below the fixture during tub installation. Reduces time and simplifies installation!

and done.



Features/Benefits

- More compact Asymmetrical Deck Flange - makes installation in tight spaces easier
- Low profile design - allows for installation in 8" joist space or greater
- 1 piece design - ensures a secure installation
- Deeper "Well" design - accommodates bath drain fittings
- Built-in Snap-off Test Cap - allows for water/air/smoke testing (Rated to 30psi)
- Island Tub Drain® is a Freestanding Tub rough-in (install before tile installation) - access below fixture not required
- Available in ABS, PVC and Total 1" 2-in-1 ABS/PVC models - see next page

Installation Tips*

- Use 4" hole saw to cut sub floor (not included). Cutting template included
- Secure Deck Flange with screws (not included)
- Do not cut the brass Tailpiece as this may cause a leak. Other tailpieces available from +osb™
- Disassembling the Drain or cutting the Tailpiece will void the warranty
- *Refer to complete installation instructions supplied with product
- NOTE: Island Tub Drain® IS NOT FOR USE with liquid applied or sheet membranes
- NOTE: Island Tub Drain® MUST BE INSTALLED in a dry area with no potential of water contact

Certification*



*The "cCSAus Meets UPC & IPC Code" mark means the product conforms to the requirements of the NPC, UPC, IPC and IRC.

Smaller all Plastic Deck Flange
Compact Asymmetrical design for easier installation in tight spaces (fits in 8" joist space or larger)

Screw holes
Fixes flange to sub floor. Screws not included

Snap off Test Cap
Allows for easy water/air/smoke testing

Available models:

- ITD60: ABS model (Shown)
- ITD51: PVC model
- ITD365: Total 1" 2-in-1 ABS and PVC model

2" DWV Outlet
2" x 1-1/2" ABS or PVC Reducing Bushing supplied.

New 1 piece design
For a secure installation. Deep Well design accommodates bath drain fittings

Certification
cCSAus meets UPC & IPC Code

Easy grip removable Mortar/Debris Guard included
Sits above floor and is easy to grip and remove (actual Guard is larger than shown)