
Item Number: A05223

WARNING (To reduce the risk of fire, electric shock, or personal injury):

- 1. We suggest installation by a licensed electrician.
- 2. Please read the instruction carefully and save it as you may need it at a later time.
- 3. Before you start, **NEVER** attempt any work without shutting off the electricity until the work is done.
 - » Go to the main fuse, or circuit breaker, box in your home. Place the main power switch in the "**OFF**" position.
 - » Place the wall switch in the "OFF" position.
- 4. Mounting surface should be clean, dry, flat, strong enough and 1/4" larger than the canopy on all sides. Any gaps between the mounting surface and canopy exceeding 3/16" should be corrected as required.
- 5. Make sure that the ceiling or wall can stand the weight of the lamp before installation.
- 6. Make sure the voltage you are using is **120V**. The maximum wattage is **LED**, **36W**.
- 7. Keep the lamp away from acidic and alkaline substances in case of damaging the surface of the lamp.
- 8. When replacing bulbs, you should turn off or unplug the lamp and you must wait until it is cool as bulbs get hot quickly.
- 9. The safety instructions appearing in this manual are not meant to cover all possible conditions that may occur. It must be understood that common sense, caution and care must be used with any electrical products.

IMAGE FOR FINISHED PRODUCT:

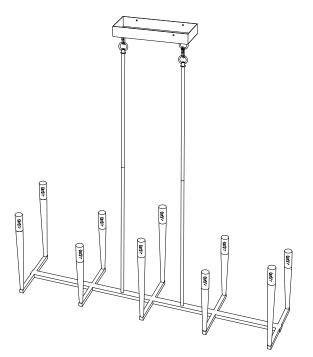

ORDERING PARTS

Keep this sheet for future reference in case you need to order replacement parts. All parts for this fixture can be ordered from the place of purchase. Be sure to use exact wording from illustration when ordering parts.

CLEANING

To clean, wipe the fixture with a soft cloth. Do not use abrasive materials such as scouring pads or powders, steel wool or abrasive paper.

| TOOLS REQUIRE (NOT INCLUDED) | Before starting assembly and installation please prepare the tools as below picture | | | |
|---------------------------------|---|-----------------|--------|--|
| | | | | Control of the second s |
| Ladder | Philips Head or Flat Blade Screwdriver | Electrical Tape | Pliers | Wire Cu |



Wire Cutter/Stripper


needed

PARTS TYPE & QTY INCLUDED:

- (E) Mounting plate (1)
- (F) Canopy screw (4)
- (G) Canopy (1)
- (H) Loop (4)
- (I) Quick link (2)
- (J) Tube
- (K) Body (10)
- (L) Frame (1)
- (M) Led driving (1)

ACCESSORIES & QTY ENCLOSED:

- (A) Anchor (2)
- (B) Anchor screws (2)
- (C) Mounting screw (2)
- (D) Plastic Wire Connector (3)

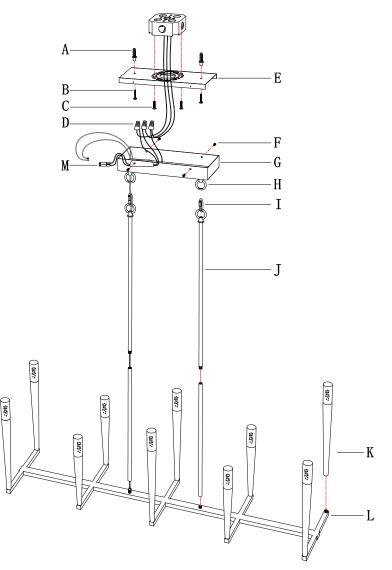


ASSEMBLY & INSTALLATION INSTRUCTIONS:

1. Carefully remove the fixture from the carton and check that all parts and accessories are included as shown in the above illustration.

2. Turn off power Before you start the installation, NEVER attempt any work without shutting off the electricity until the work is done.

- Go to the main fuse, or circuit breaker, box in your home.
 Place the main power switch in the "OFF" position.
- » Place the wall switch in the "OFF" position.

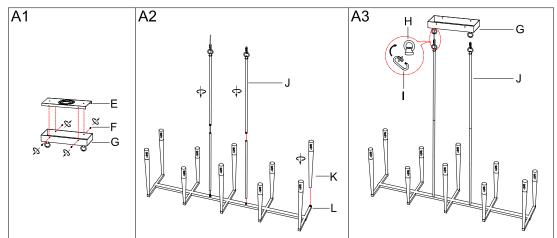

Step A1 » Unscrew canopy screws (F) from mounting plate (E) and canopy (G).

Step A2 » 1) Carefully pass the fixture wires through one side of tubes (J) and loops (H).


2) Screw tubes (I) and bodies (K) to nipple of frame (L) as shown in the illustration.

3. Turn off power

Before you start the installation, NEVER attempt any work without shutting off the electricity until the work is done.

- Go to the main fuse, or circuit breaker, box in your home.
 Place the main power switch in the "OFF" position.
- » Place the wall switch in the "OFF" position.

4. Make installation

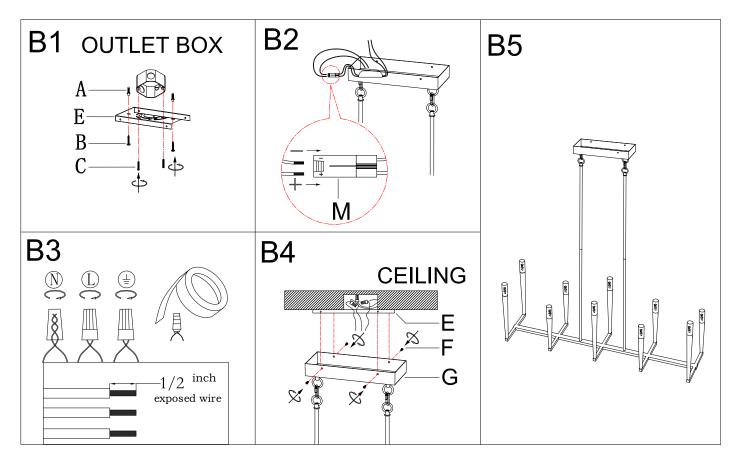


Step B1 » Carefully pass the supply wires from the outlet box through mounting plate (E).

- 1) NOTE:To drill the holes in the wall for anchors (A), attach mounting plate (E) to wall with screws (B & C)
- 2) Attach mounting plate (E) to outlet box and then mark the position of holes in the wall with a pen as shown in the illustration.
- 3) Drill holes and gently knock anchors (A) into the marked holes until anchors (A) are level with the wall.
- 4) Secure mounting plate (E) to the wall with screwing anchor screws (B) into anchors (A) and mounting screws (C) into holes of mounting plate (E).


Step A3 » Open quick links (I). Attach quick links (I) to loops (H) on canopy (G) and on the top of tubes (J). Close quick links (I).



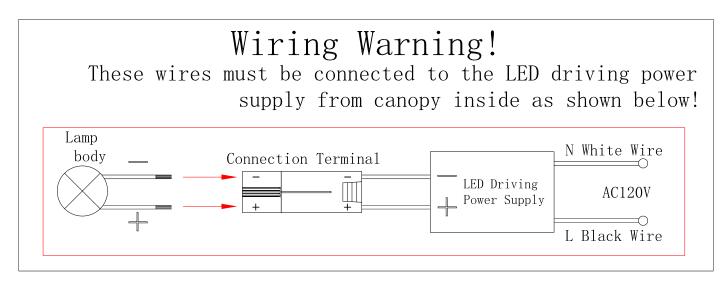

Step B3 » Make wire connections

Connect wires as shown in the charts below. *PLEASE NOTE THAT GROUND WIRE IS BARE COPPER WIRE, NEVER CONNECT OTHER WIRES TO GROUND WIRES.*

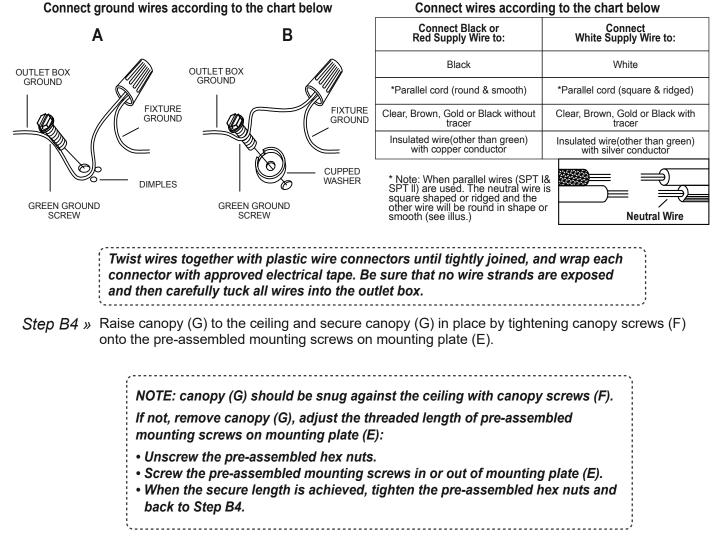

Step B5 » Check that everything is installed properly, then you can turn on the light. We hope you enjoy your new lighting!