

# ASSEMBLY AND INSTALLATION INSTRUCTIONS

H0161

**WARNING:** TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER BEFORE INSTALLING OR SERVICING THIS FIXTURE.

NOTES: 1. Before installing, consult local electrical codes for wiring and grounding requirements.  
2. READ AND SAVE THESE INSTRUCTIONS.

## Hardware Package (included):



Mounting Strap (A)



Mounting Screw (B)



Green Grounding Screw (C)



Hex Nut (D)



Wire Nut (E)



Threaded Pipe (F)



Canopy (G)



Top Loop (H)



Collar (I)



Washer (J)



Loop Lock (K)



Chain (L)

## Assembly Instructions:


Turn off the power at fuse or circuit box.

1. Attach the threaded pipe to the mounting strap, and then secure it with a washer and a hex nut.
2. Attach the mounting strap to the outlet box by using two mounting screws.
3. Attach the long threaded pipe to the fixture, secure it with the set screw.
4. Slip the tube cap with the open side facing upward, the long tube, the tube cap with the open side facing downward, decoration, the tube cap with the open side facing upward, the short tube and the tube cap with the open side facing downward through the long threaded pipe, secure them with the loop.

**NOTE:** The decoration should be aligned with below arms.

5. Connect the chain:

- Determine needed length of chain to achieve desired fixture height. (To remove excess chain section, use pliers to bend link open.)
- Weave the fixture wires through the chain, collar, and canopy.

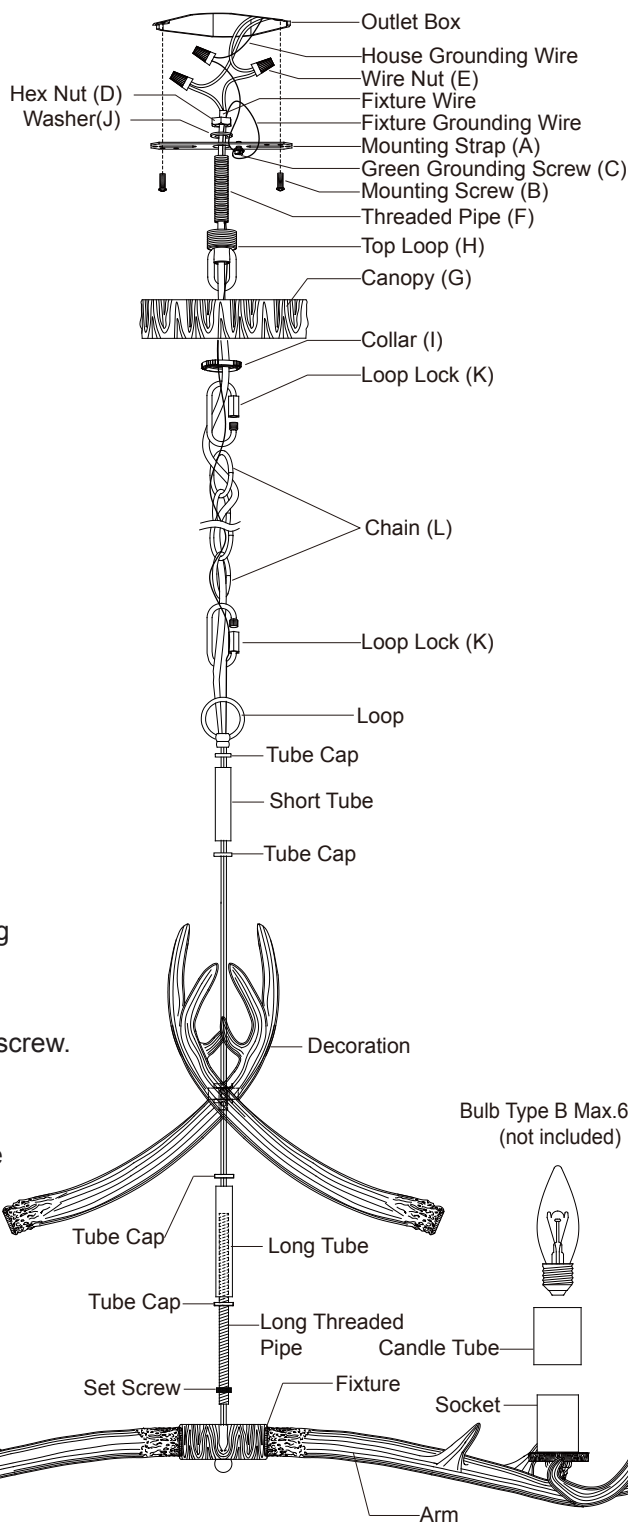














6. Connect one end of the chain to the loop using a loop lock.
7. Connect the other end of the chain to the top loop using the other loop lock.
8. Thread the fixture wire and fixture grounding wire through the top loop, the threaded pipe and the mounting strap.
8. Pull out the source wires from the outlet box. Make wire connections using wire nuts as follows:
  - Connect the smooth-coated wire (marked) from the fixture to the black wire from the power source.
  - Connect the ribbed-coated wire (unmarked) from the fixture to the white wire from the power source.
  - Attach the fixture grounding wire to the mounting strap with the green grounding screw, and then connect it to the house grounding wire with a wire nut.
 Carefully put the wires back into the outlet box.
9. Attach the canopy to the mounting strap: insert the top loop through hole, and then secure it by tightening collar.
10. Attach the candle tubes onto the sockets.
11. Install bulbs (not included). See relamping label at socket area or packaging for maximum allowed wattage.

**Turn on the power at fuse or circuit box.**

**The following parts are available for re-order if damaged or missing.**

### **Spare Parts List:**

						
Mounting Strap (A)	Mounting Screw (B)	Green Grounding Screw (C)	Hex Nut (D)	Wire Nut (E)	Threaded Pipe (F)	
						Assembly Kit (5425MM) (1 SET)
Canopy (G)	Top Loop (H)	Collar (I)	Washer (J)	Loop Lock (K)	Chain (L)	

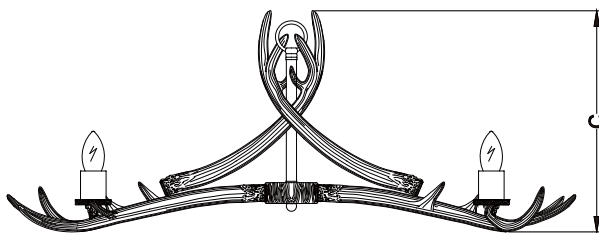

A: 44-1/2"

B: 21"

C: 18"

