

Highline® Class Five® Dual Flush Toilet K-3989-RA

Features

- Two-piece toilet.
- Elongated bowl offers added room and comfort.
- Comfort Height® feature offers a chair-height seat that makes sitting down and standing up easier for most adults.
- Right-hand nested trip lever offers a choice of 1.1 or 1.6 gallons per flush (gpf).
- 2-1/8-inch glazed trapway.
- Combination consists of the K-4199 bowl and the K-4458-RA tank
- Seat not included.

Technology

 Dual-flush technology allows you to choose between a full- or partial-flush.

Installation

- Standard 12-inch rough-in.
- Three-bolt installation.

Water Conservation & Rebates

- WaterSense® toilets meet strict EPA flushing guidelines, including using at least 20 percent less water than 1.6-gallon toilets.
- Eligible for consumer rebates in some municipalities.
- This product meets water savings requirements for Colorado SB 14-103.

Recommended Accessories

K-4636 Cachet® Quiet-Close™ Elongated Toilet Seat K-5588 Purefresh® Elongated Toilet Seat K-4108 C3®-230 Elongated Cleansing Toilet Seat K-5420 Low-Profile Bolt Caps K-9236 Trip Lever Dual Flush 1023457 Wax Ring/Hardware Kit 1265114 Connector Hose

Components

Product includes:

K-4458-RA Dual-Flush Tank

K-4458 Dual-Flush Tank

K-4199 Comfort Height® Elongated Bowl

K-9236 Trip Lever Dual Flush

Additional included component/s: Bowl, Tank, Tank cover, Trip lever, and Bolt cap accessory pack.





ADA CSA B651

Codes/Standards
ASME A112.19.2/CSA B45.1
EPA WaterSense®
ADA
ICC/ANSI A117.1

CSA B651 OBC

KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

Available Color/Finishes

Color tiles intended for reference only.


Color	Code	Description
	0	White
	96	Biscuit
	47	Almond





Highline®

Class Five® Dual Flush Toilet K-3989-RA

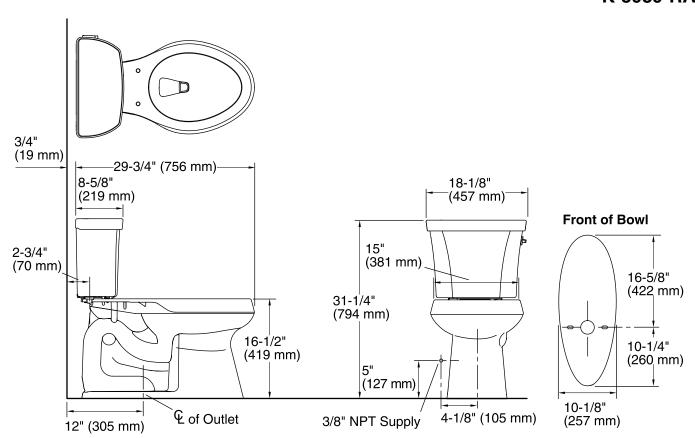

Technical Information

All product dimensions are nominal.

Toilet type: Two-piece, Floor-mount

Waste Outlet: Floor

Bowl shape: Elongated front Flush type: Class Five® Trap passageway: 2-1/8" (54 mm)

Water Consumption

Full: 1.6 gpf (6 lpf)
Reduced: 1.1 gpf (4.3 lpf)

Water surface size: 11-3/8" x 8" (289 mm x 203 mm)

Rim to water surface: 5-3/8" (137 mm)

Rough-in: 12

Seat-mounting holes: 5-1/2" (140 mm)

Notes

Install this product according to the installation instructions.

The Model Plumbing Codes require the installation of elongated open-front toilet seats in public bathrooms.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations. Plumbing codes may require elongated toilets and elongated, open-front seats in public bathrooms.

Accessibility standards may require controls to be located on the open side of the toilet.

