




PROP™

LP8323LBN 60" Ceiling Fan Lowes Item #588961

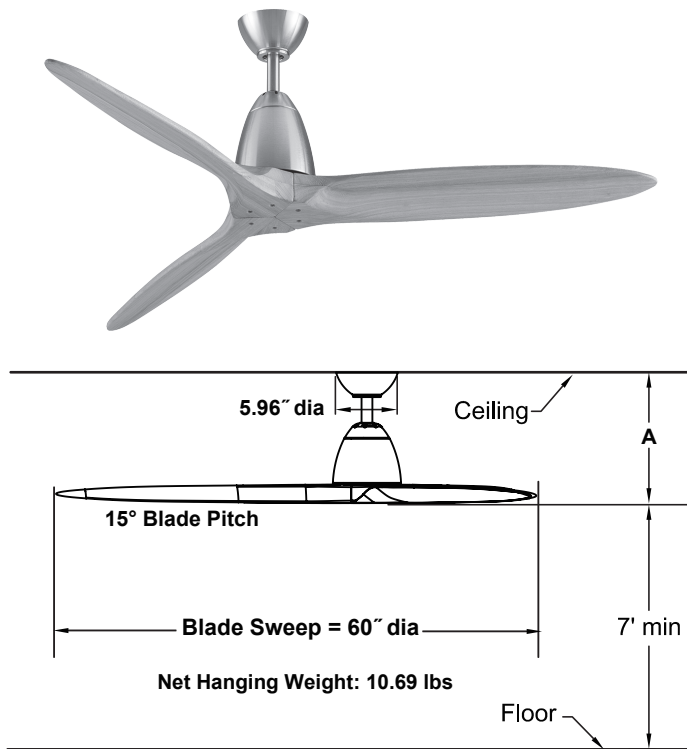

	A
Fan w/4.5" downrod	12.70"
Fan w/12" downrod	20.20"
Fan w/18" downrod	26.20"
Fan w/24" downrod	32.20"
Fan w/36" downrod	44.20"
Fan w/48" downrod	56.20"
Fan w/60" downrod	68.20"
Fan w/72" downrod	80.20"

INSTALLATION REQUIREMENTS:

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 35 lbs.

ELECTRICAL REQUIREMENTS:

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

MOTOR SPECS:

DC 125NS sensorless DC motor is designed for optimal performance with this fan. Fan is Energy Star Rated.

BLADES:

A set of three 30" buttonwood blades is included.

CONTROL OPTIONS:

TR34S hand-held DC fan remote control is included. Push button remote control has 6 fan speeds, fan off and reverse button.

DOWNROD OPTIONS:

Fan comes with a 1" Dia. x 4.5" downrod (DRT1-45). Optional downrods are available in 12", 18", 24", 36", 48", 60" and 72". For installations requiring a longer downrod, a downrod coupler is available. Fan can be mounted on a sloped ceiling up to 19°. Optional close-to-ceiling kit is available as well—sold separately. Optional sloped ceiling kits (SCK1-52) are available for up to 42°. Call technical support for more information.

LOCATION USE:

Fan is rated for dry location only.

Available Finishes

BN	Brushed Nickel with Natural buttonwood blades
----	---

Airflow / Energy Efficiency Info (120V)

Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
I	50	2378	1321	0.04	2
II	69	3224	1112	0.05	3
III	88	3950	823	0.07	5
IV	107	4951	635	0.11	8
V	126	5613	449	0.17	13
VI	145	6580	337	0.26	20

Energy Guide FTC

Power (W _{ave})	Total Air Delivery (CFM _{ave})	Estimated Yearly Energy Cost (\$)	Ceiling Fan Efficiency (CFM/W)
16	4408	5	272