# Rite-Temp® shower trim kit, 1.75 gpm K-TS27404-4G



#### **Features**

- Pressure-balancing diaphragm technology maintains outlet temperature within +/-3°F during water pressure fluctuations
- Antiscald protection
- A single handle controls both on/off activation and temperature setting
- Includes faceplate with ADA-compliant metal lever handle
- Includes single-function 1.75 gpm (6.6 lpm) showerhead
- MasterClean<sup>™</sup> sprayface features an easy-to-clean surface that withstands mineral buildup and maximizes spray performance
- Includes shower arm and flange
- Coordinates with other products in the Riff collection
- Requires Rite-Temp® pressure-balancing valve (sold separately)

#### Material

- Premium material construction with metal handle ensures reliability and durability
- KOHLER® finishes resist corrosion and tarnishing

## **Required Products/Accessories**

K-8304 Series Rite-Temp® Valve & Cartridge Kits or

K-8300 Series Rite-Temp® Valve Body Rough-ins K-8305 Series Rite-Temp® Cartridges

#### Adapters, Rough-in and Extension Kits

10350 Range: 3-1/2" (89 mm) - 4-1/4" (108 mm)

#### **Recommended Products/Accessories**

K-23723 Faucet cleaner

#### **Optional Products/Accessories**

K-10350 Deep rough-in kit K-10351 Test cap for K-8300 Series valve bodies







#### Codes/Standards

ASME A112.18.1/CSA B125.1 DOE - Energy Policy Act 1992 EPA WaterSense® California Energy Commission (CEC) IAPMO Certification

## **KOHLER® Faucet Lifetime Limited Warranty**

See website for detailed warranty information.


#### Available Colors/Finishes

Color tiles intended for reference only.

Color	Code	Description
	CP	Polished Chrome
	SN	Vibrant® Polished Nickel
	BN	Vibrant® Brushed Nickel
	BL	Matte Black
	2MB	Vibrant® Brushed Moderne
		Brass





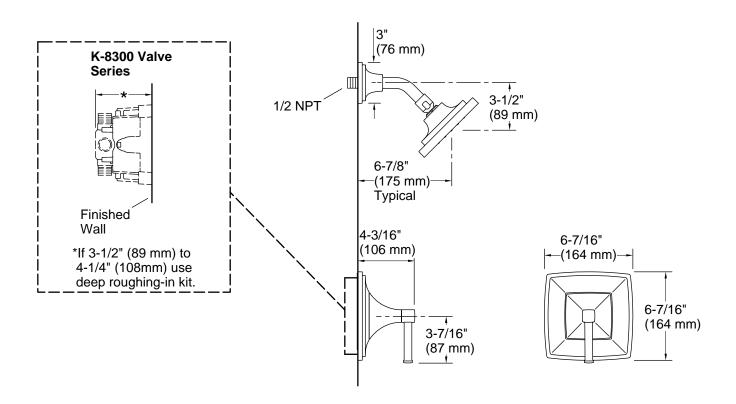

### **Technical Information**

All product dimensions are nominal.

Drain included: No

Handshower:

Rated maximum 0 gal/min (0 l/min)

flow:

## **Showerhead/Body Spray:**

Rated maximum 1.75 gal/min (6.6 l/min)

flow:

#### **Notes**

Install this product according to the installation instructions.

