

Side Table

ASSEMBLY INSTRUCTION

1. Before installation, please read the Assembly Instruction carefully.
2. Please check whether the Parts and Hardware are consistent with the list.
3. It is normal for the sealed environment to smell, not a product quality



Clihome


















Web: <https://clihome.net/>

Service Contact : service@clihome.net


Phone Number:

(951) 213-4743/303-747-4421

HARDWARE LIST

NO.	DESCRIPTION	QTY	NO.	DESCRIPTION	QTY
A	 Φ 6*35	12	J	 Φ 6*40	2
B	 Φ 15*10	12	K		4
C	 Φ 6*30	12	L	 Φ 3*16	4
D	 Φ 4*40	4	M	 Φ 5x30	4
E		1	N	 Φ 3*12	24
F	 Φ 4x35	8	O		4
G		2	P	 Φ 4*12	6
H	 Φ 4*10	4	Q		4
I		1			



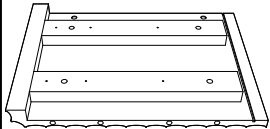

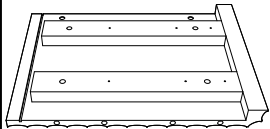


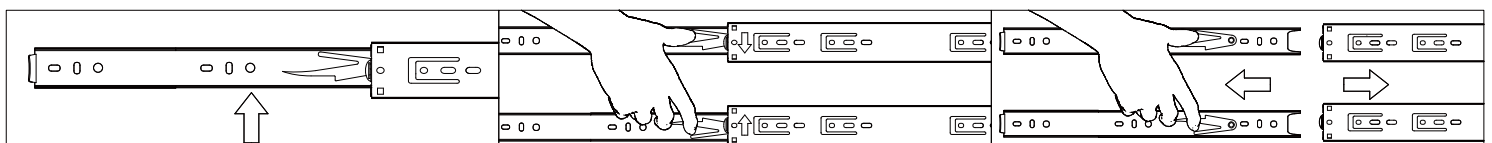





↑ Runner Operation



1. Find Switch


2. Push Down or Up

3. Pull out of Runner

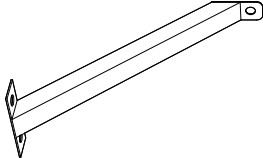


PART LIST							
LTEM.	DESCRIPTION	PART	QTY	LTEM.	DESCRIPTION	PART	QTY
1	TOP PANEL		1	8	DRAWER RIGHT SIDE PANEL		2
2	LEFT SIDE PANEL		1	9	DRAWER BACK PANEL		2
3	RIGHT SIDE PANEL		1	10	DRAWER BOTTOM PANEL		2
4	BOTTOM PANEL		1	11	METAL LEG		2
5	BACK PANEL		1	12	BOTTOM SUPPORT METAL		1
6	DRAWER FRONT PANEL		2	13	BOTTOM SUPPORT METAL		2
7	DRAWER LEFT SIDE PANEL		2				

Layout Parts on Soft Surface

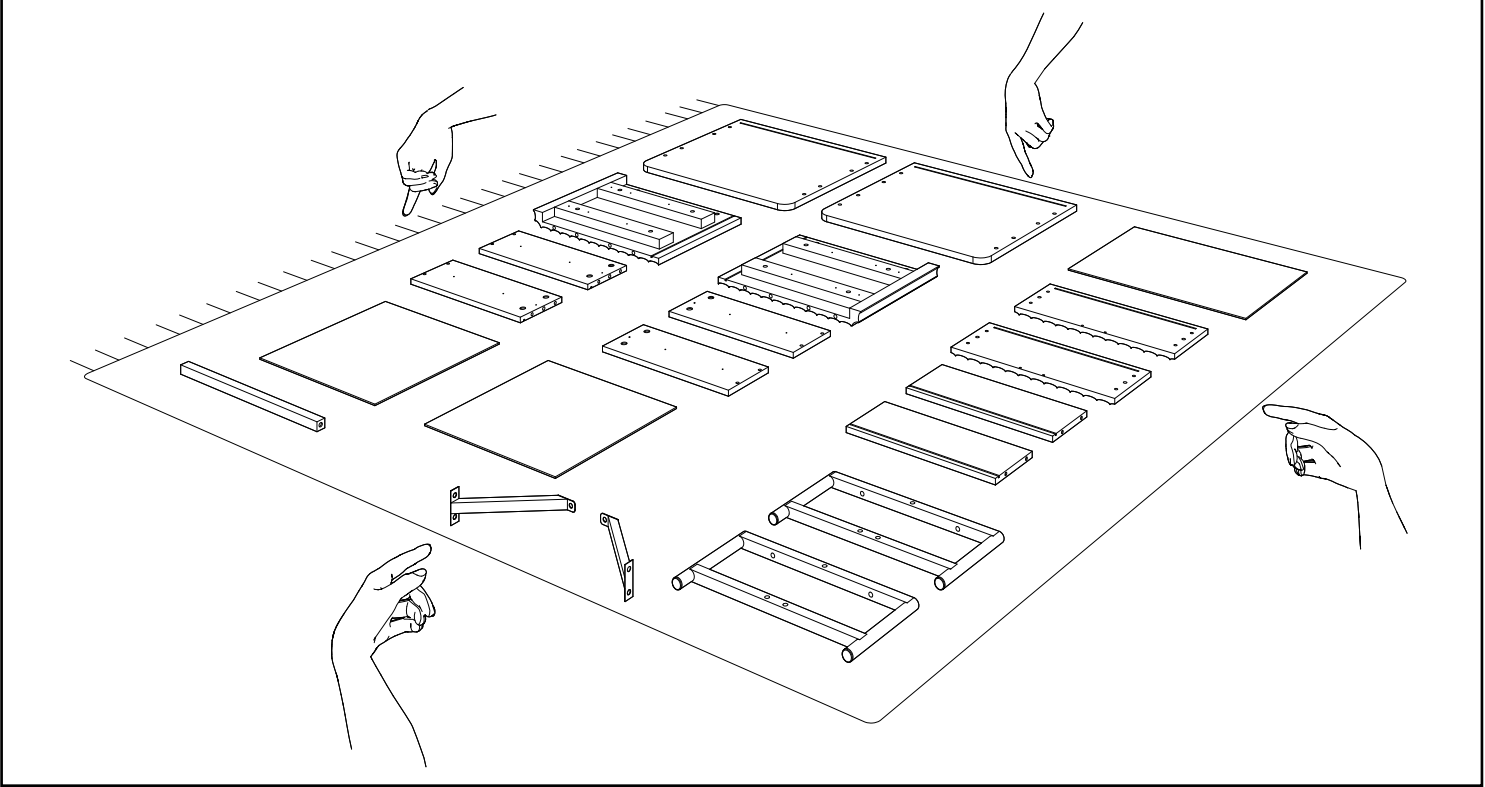Lay out all parts on a soft surface i.e. Rug, Carpet or Packaging Carton



Assembly Details

30_{mins} Approximate Assembly Time	 2 person assembly	Floor Area: 1.5X1.5 meters Required Assembly Space 
Required Assembly Tools Phillips-Head Screwdriver 		

Tips Before you Start


1. Please check that all parts are present before you start the assembly of your furniture.
2. For ease and speed of assembly, we recommend that before you commence each step of the assembly, that you identify all the parts required for that step.
3. We recommend that, where possible, all items are assembled near to the area in which they will be placed in use, to avoid moving the product unnecessarily once assembled.
4. For the protection of your furniture, we recommend that the product is placed on a protected surface during assembly to prevent any damage.
5. During assembly please take care not to over-tighten any fittings, as this may damage the product. Do not use power tools.
6. Always place the product on a flat, steady and stable surface.
7. Do not stand on the product. Do not use the product as a stepladder.
8. Please use caution and care when lifting the product to avoid personal injury and/or product damage.

Care and Maintenance


- Upon completion of assembly be sure that all screws, bolts and fastening
- Never clean with abrasive ammonia base, bleach base or spirit type cleaners.
- Use only replacement parts supplied by manufacturer.

INSTALLATIONS



STEP 1

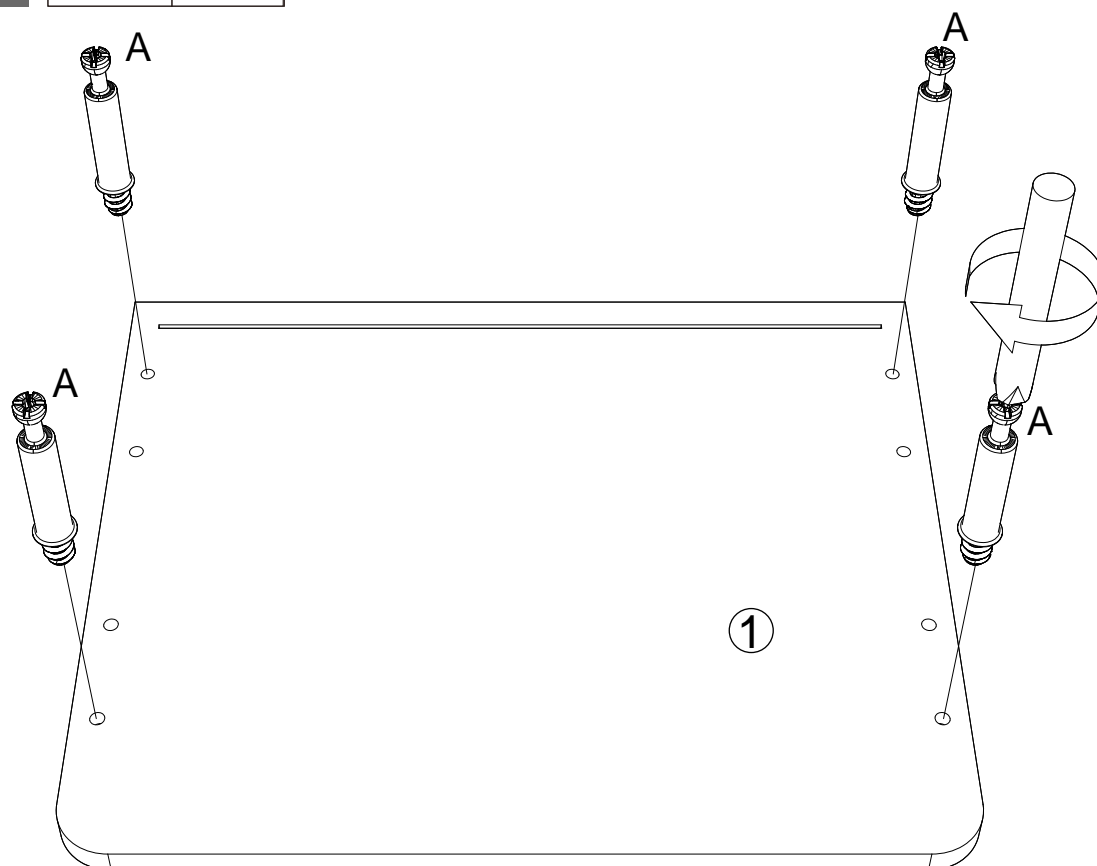


STEP 2

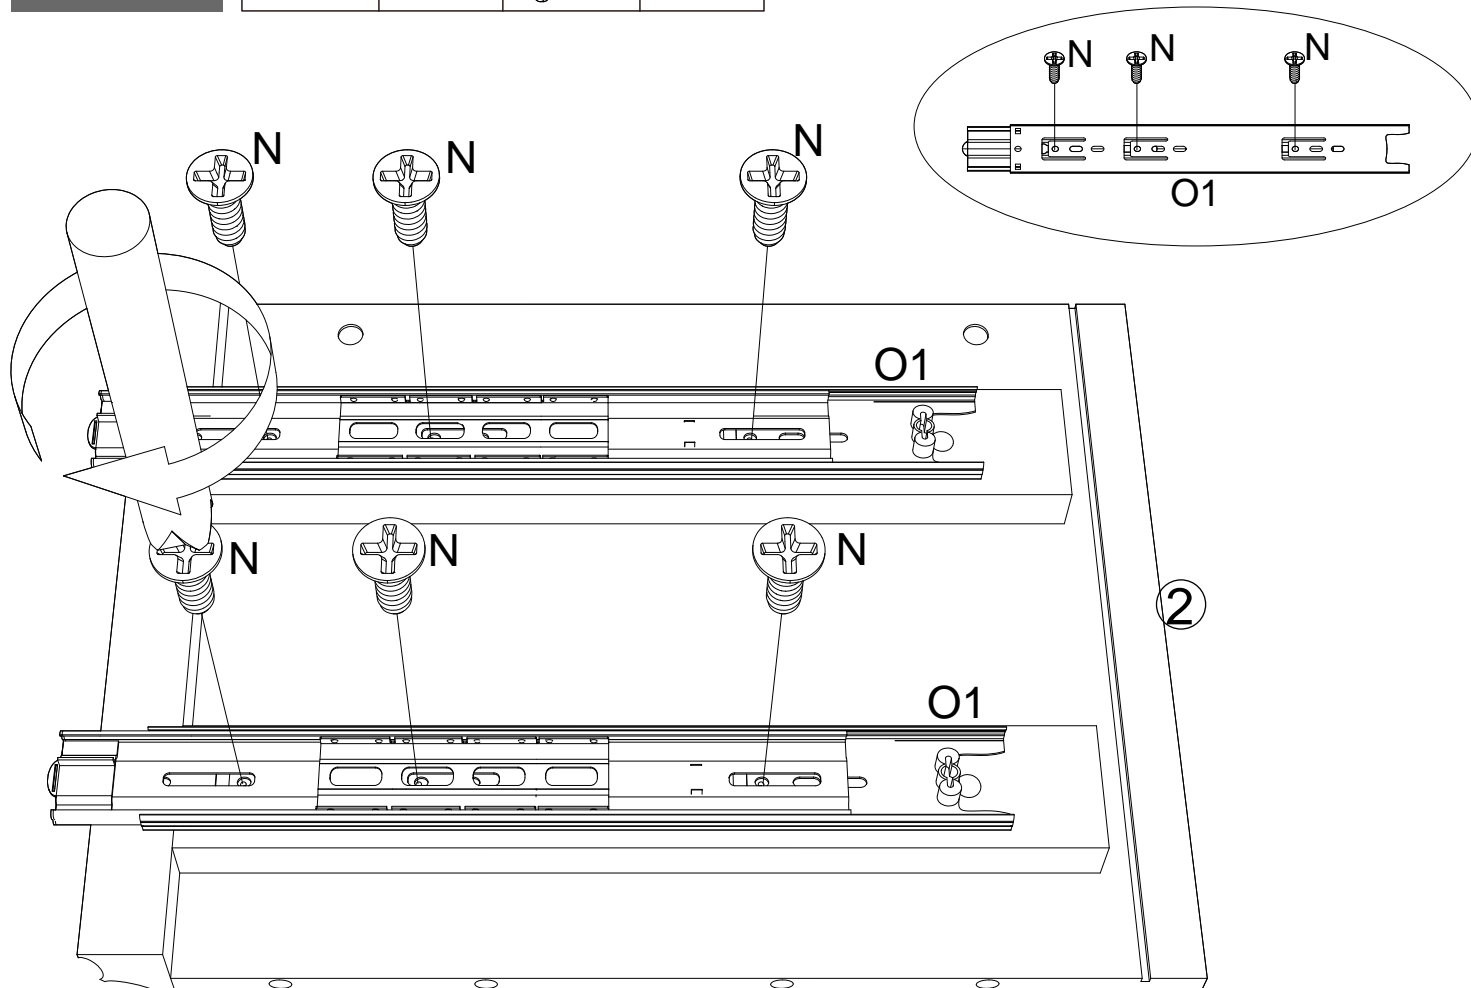


STEP 3

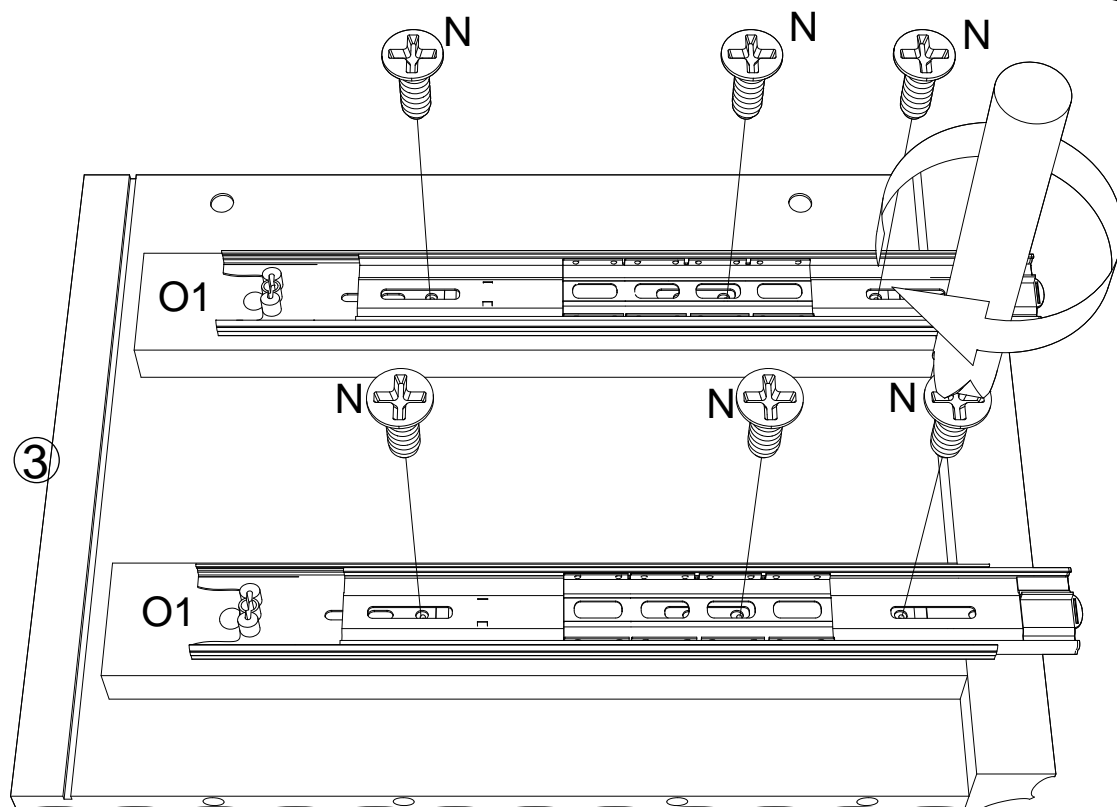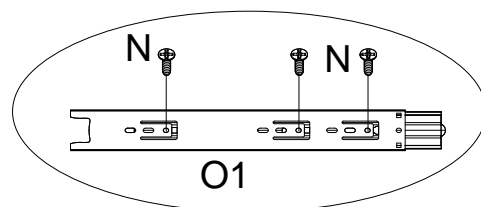

STEP 4

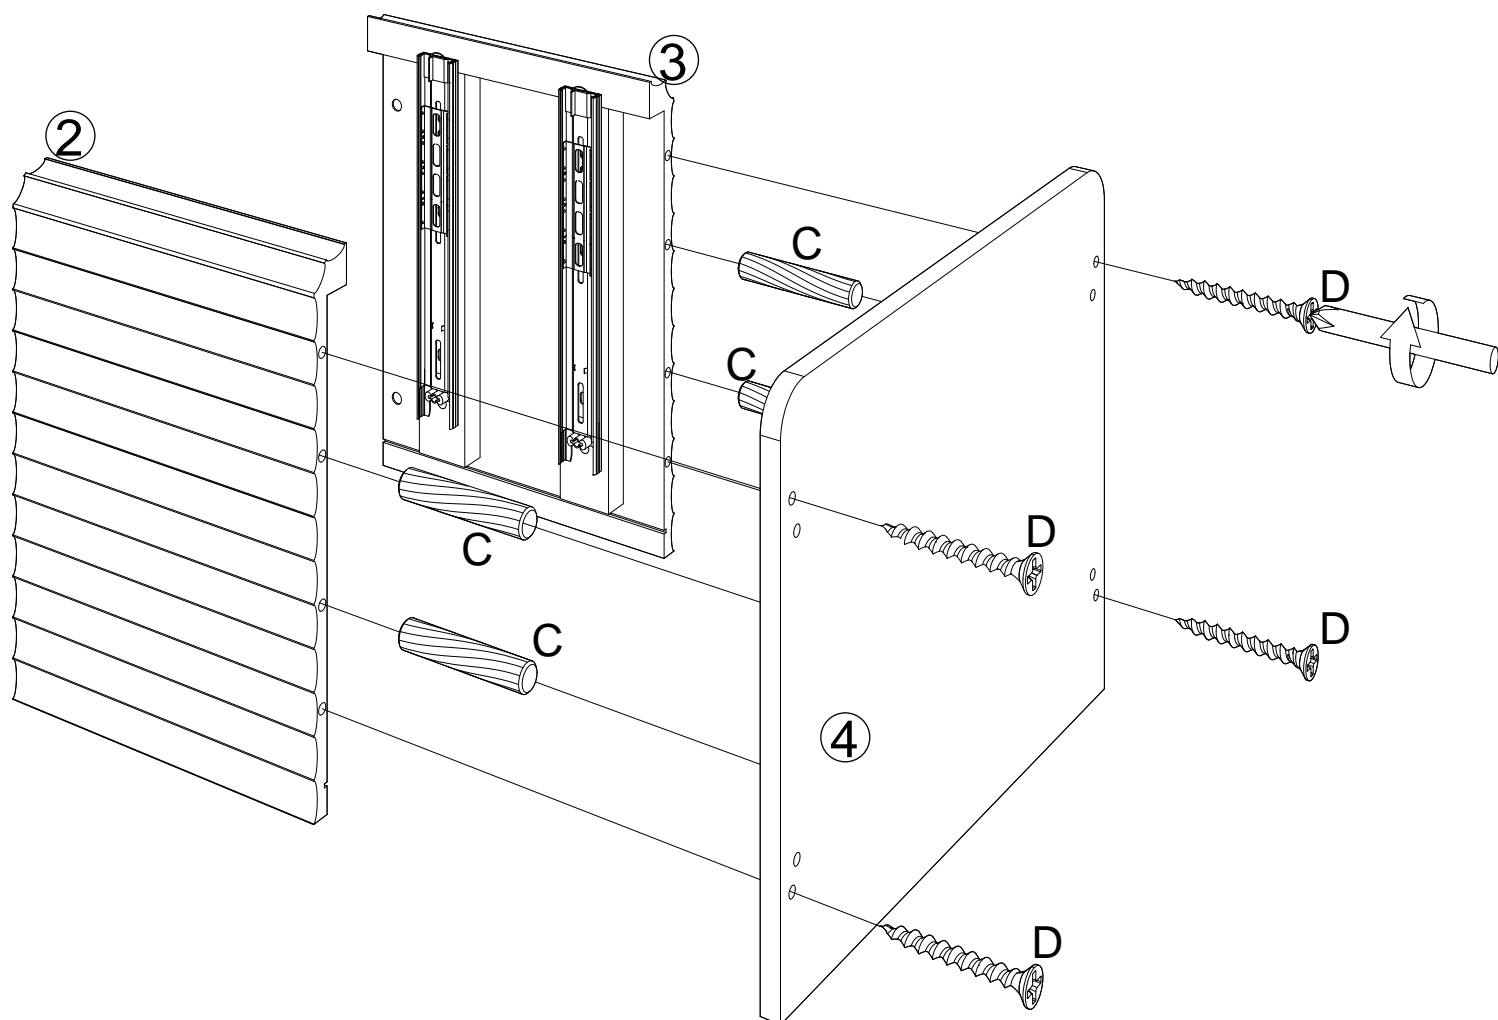

STEP 5

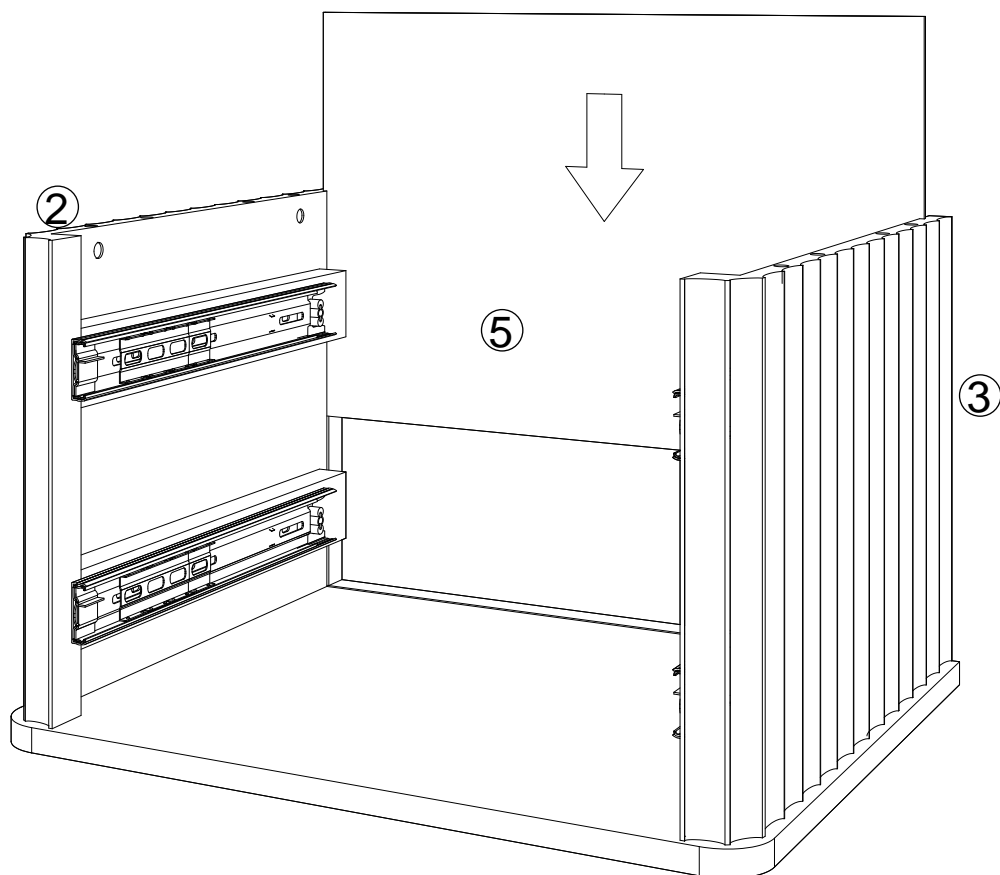


STEP 6



BX4




CX4

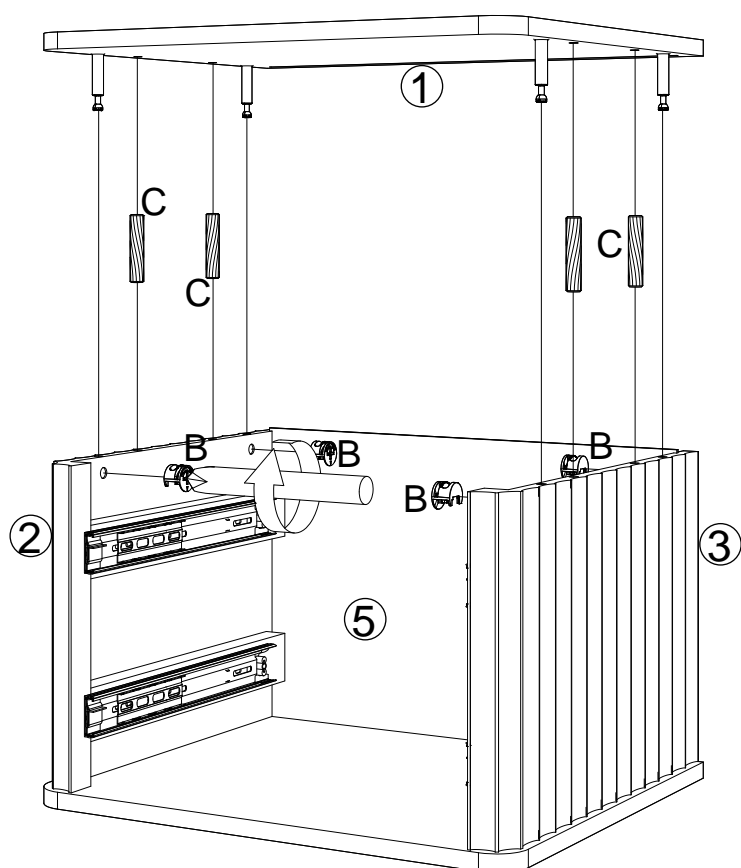


STEP 7



PX4

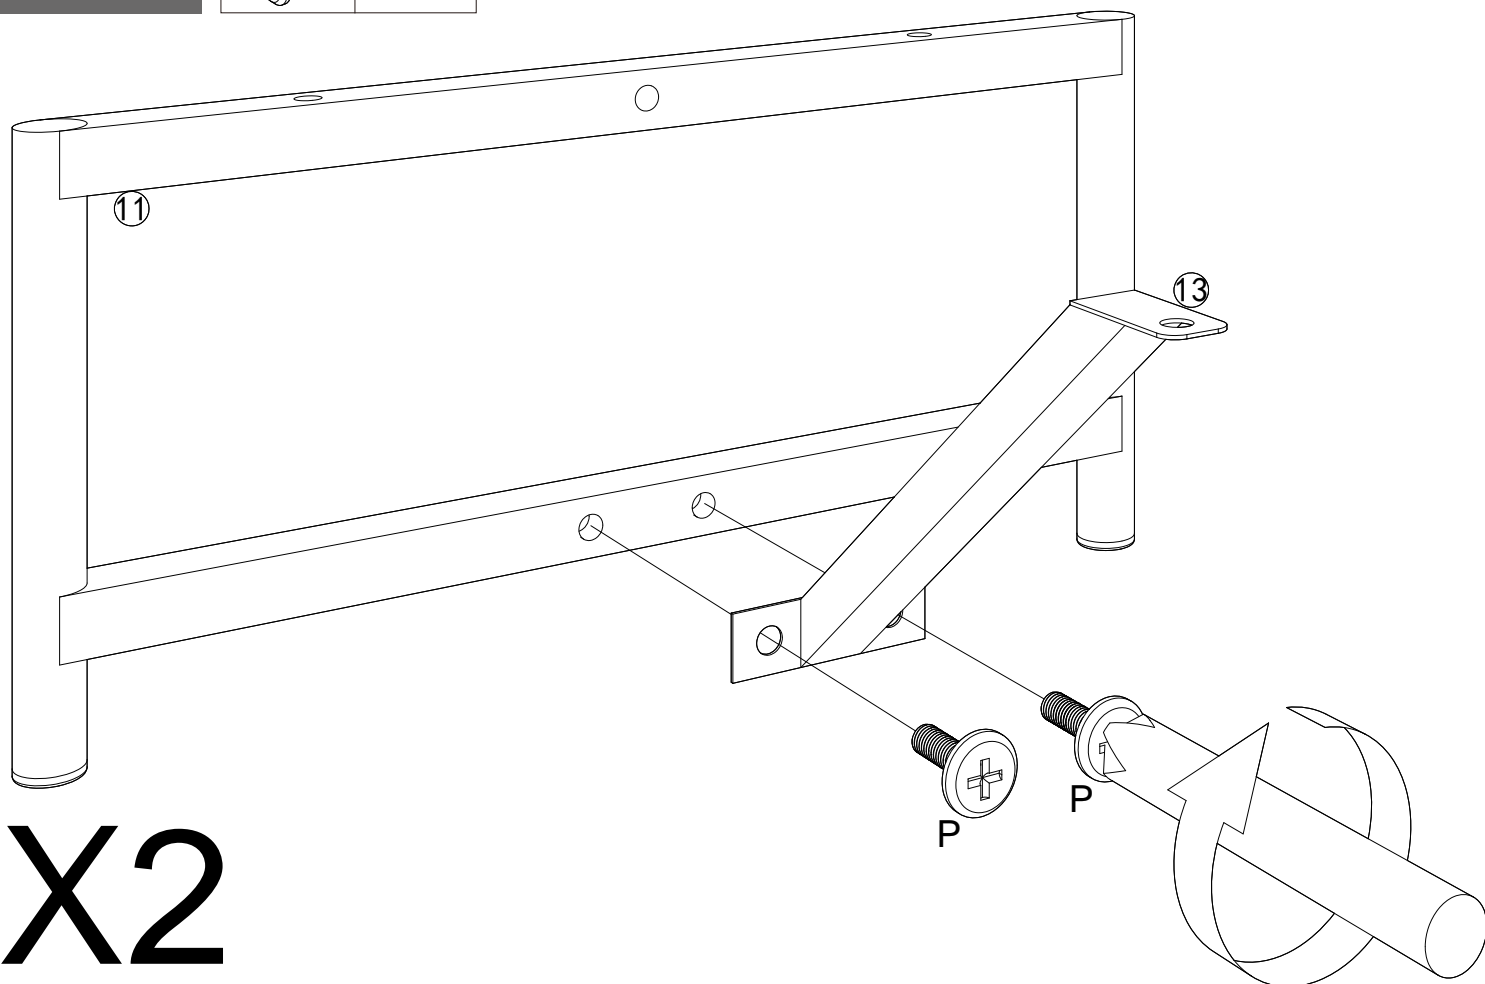


STEP 8



IX1




JX2

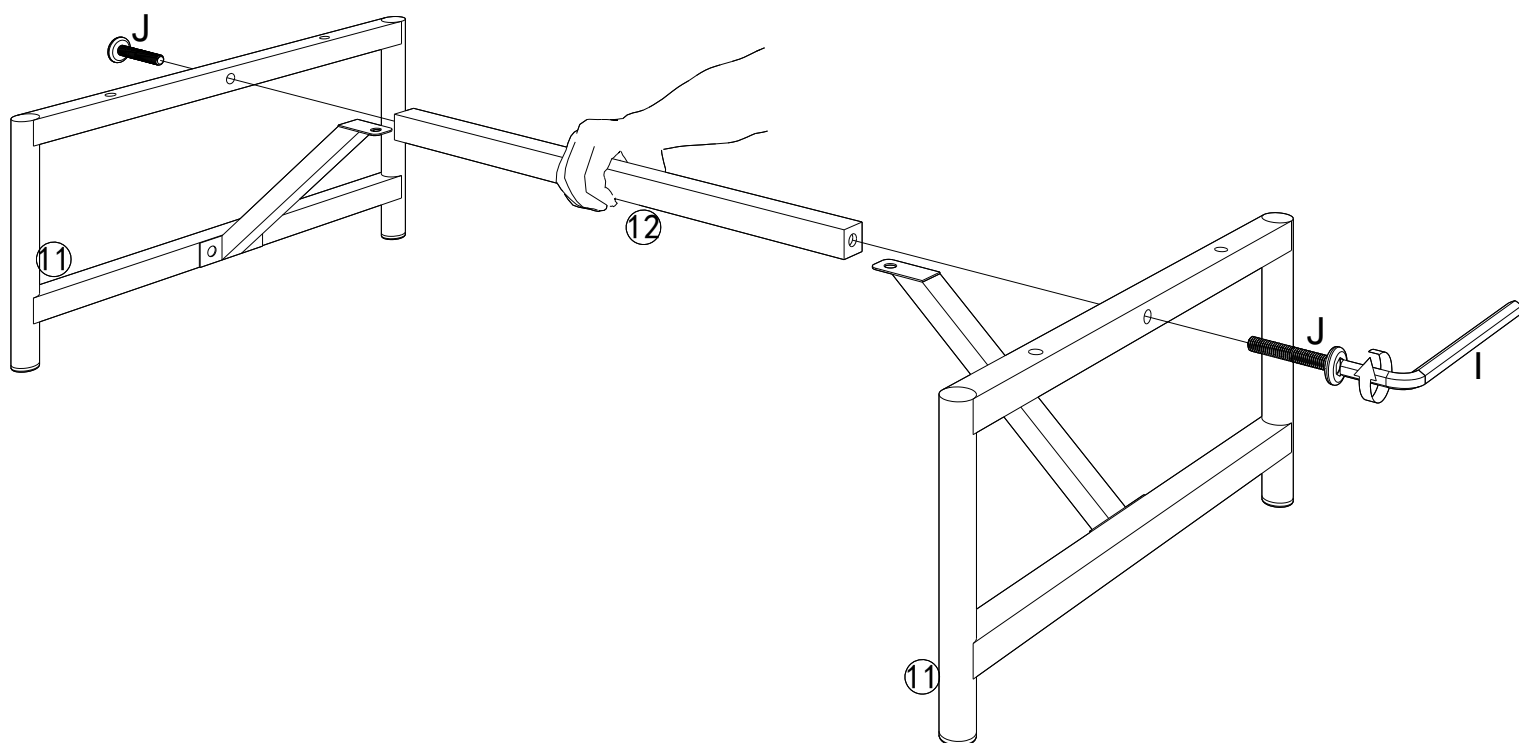

STEP 9




PX2

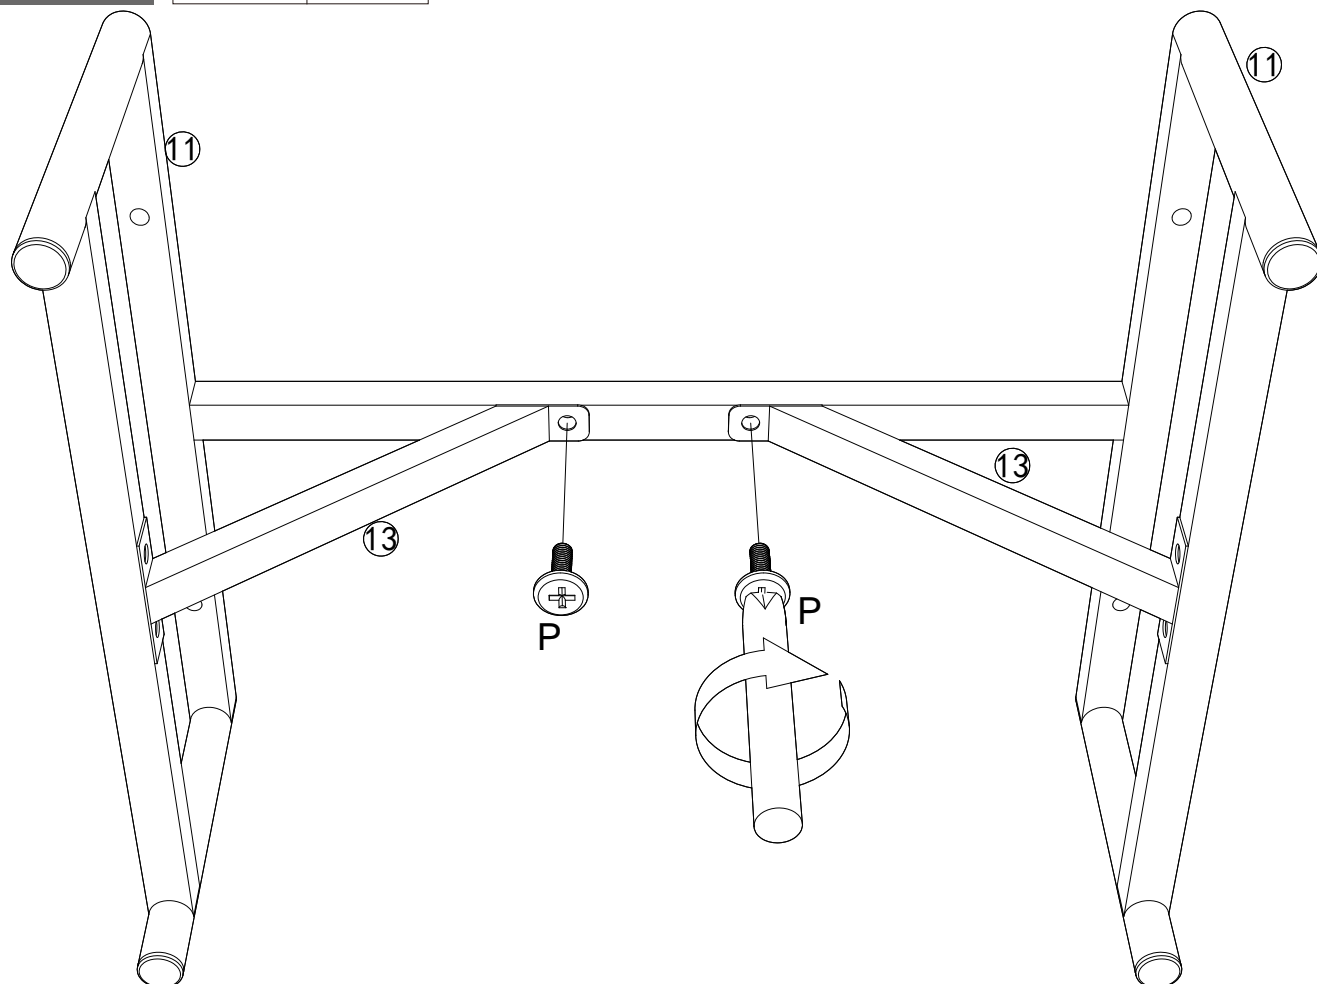

STEP 10




IX1




MX4



QX4

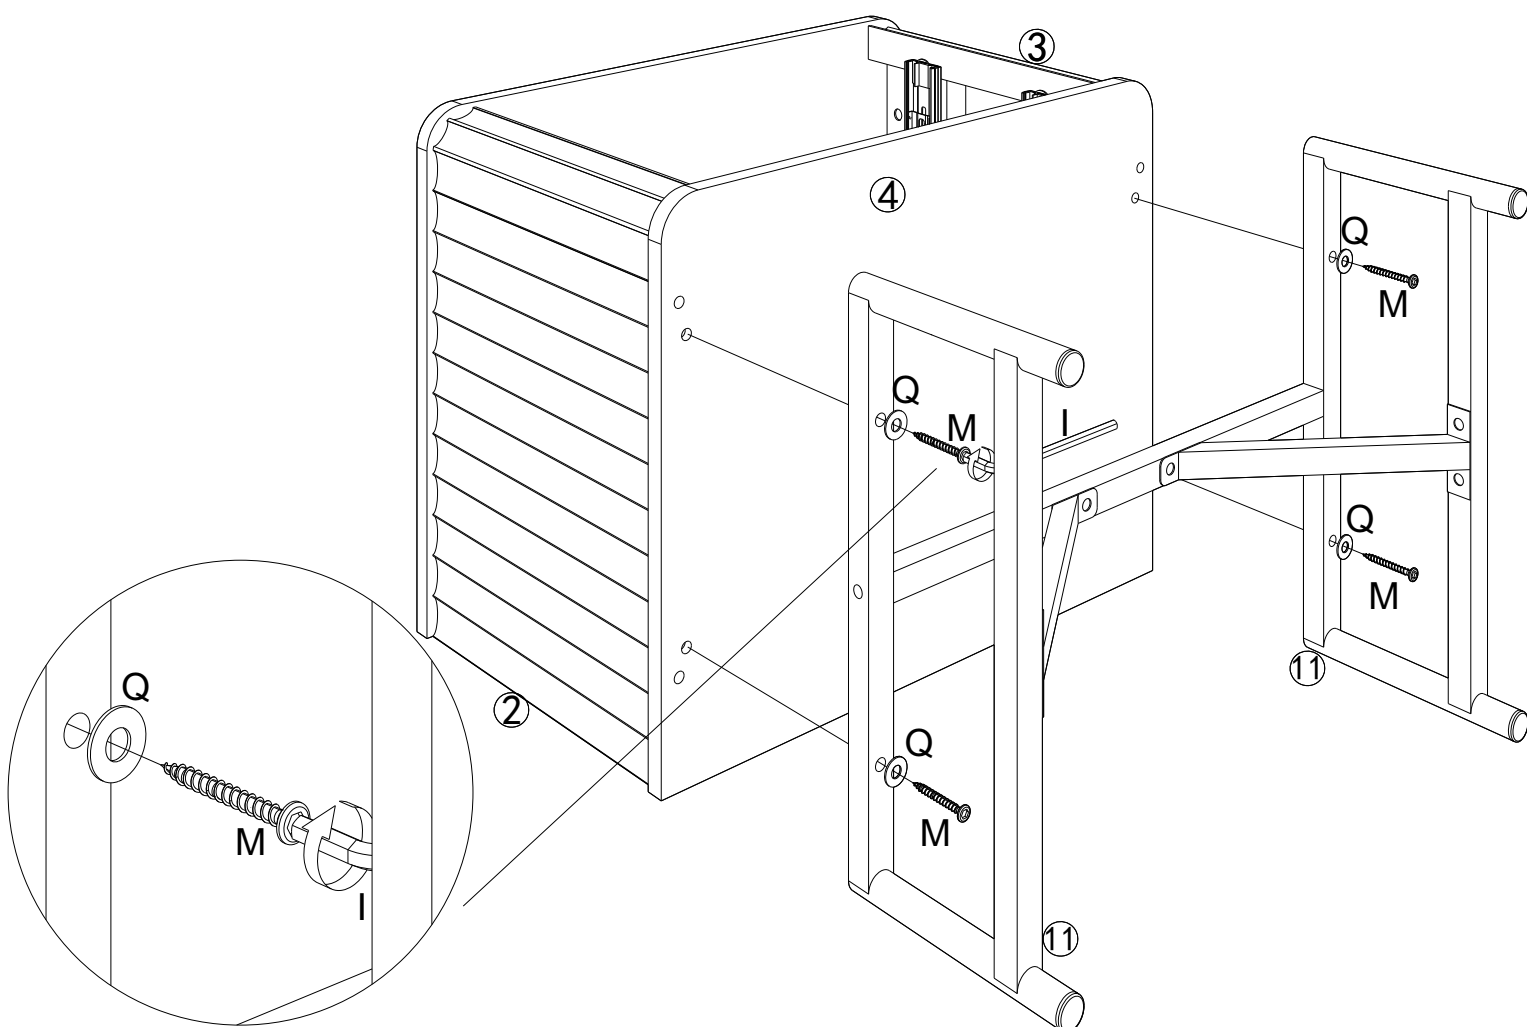


STEP 11

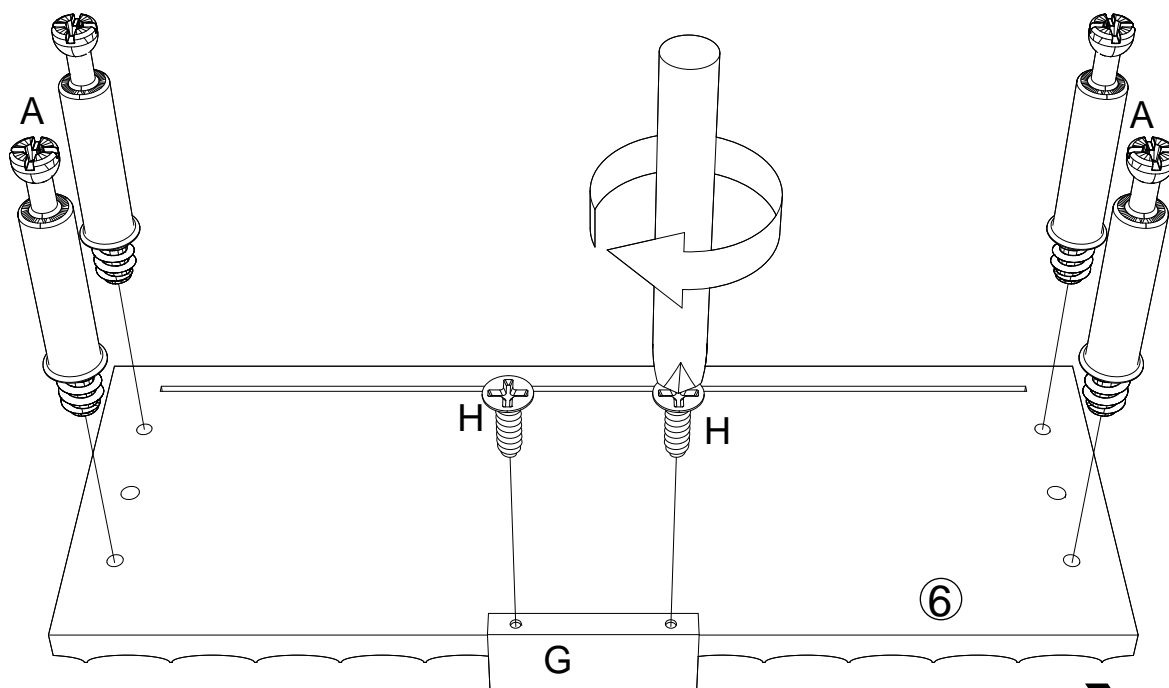


X2

STEP 12

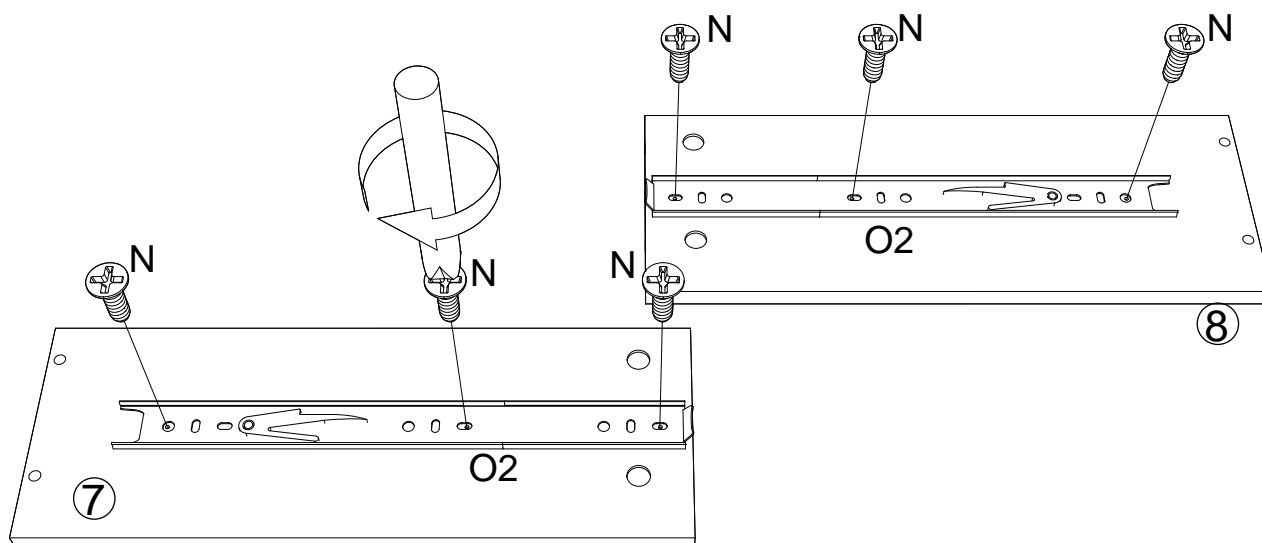


X2

STEP 13




FX8

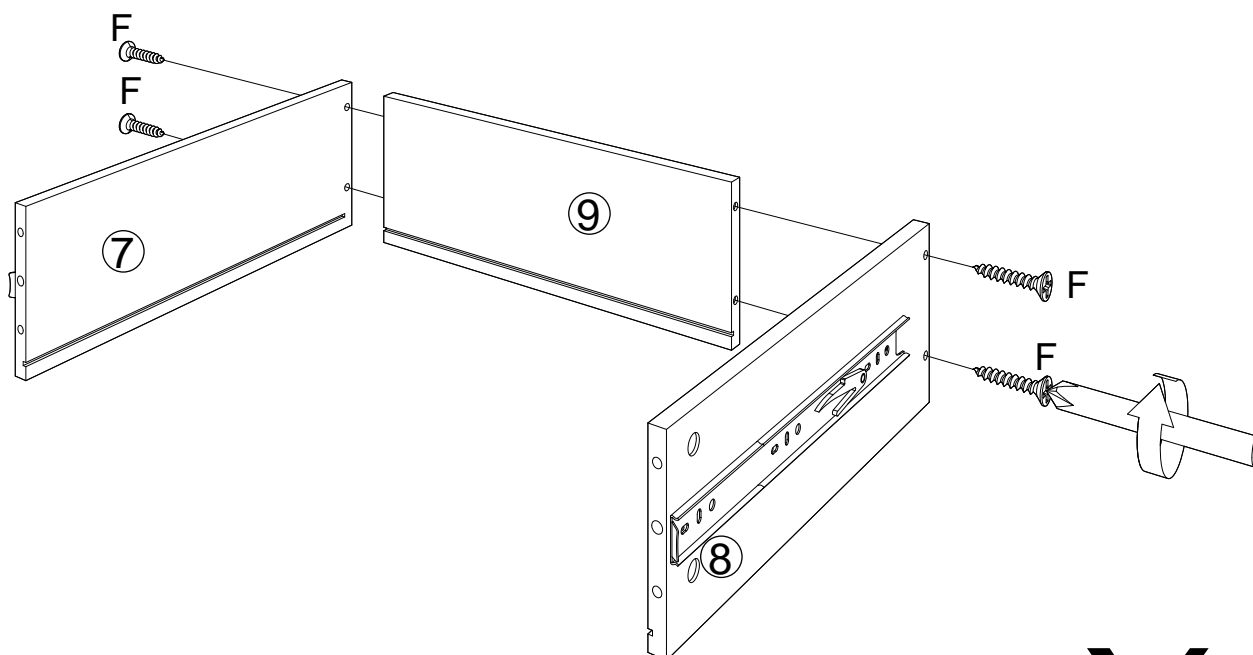

X2

STEP 14

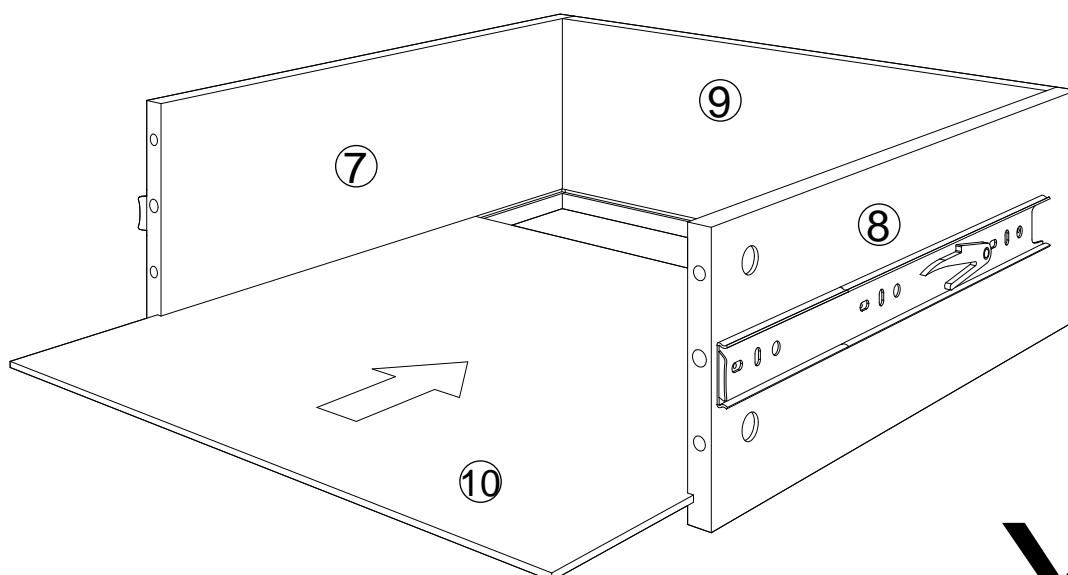

X2


STEP 15



BX8





CX4

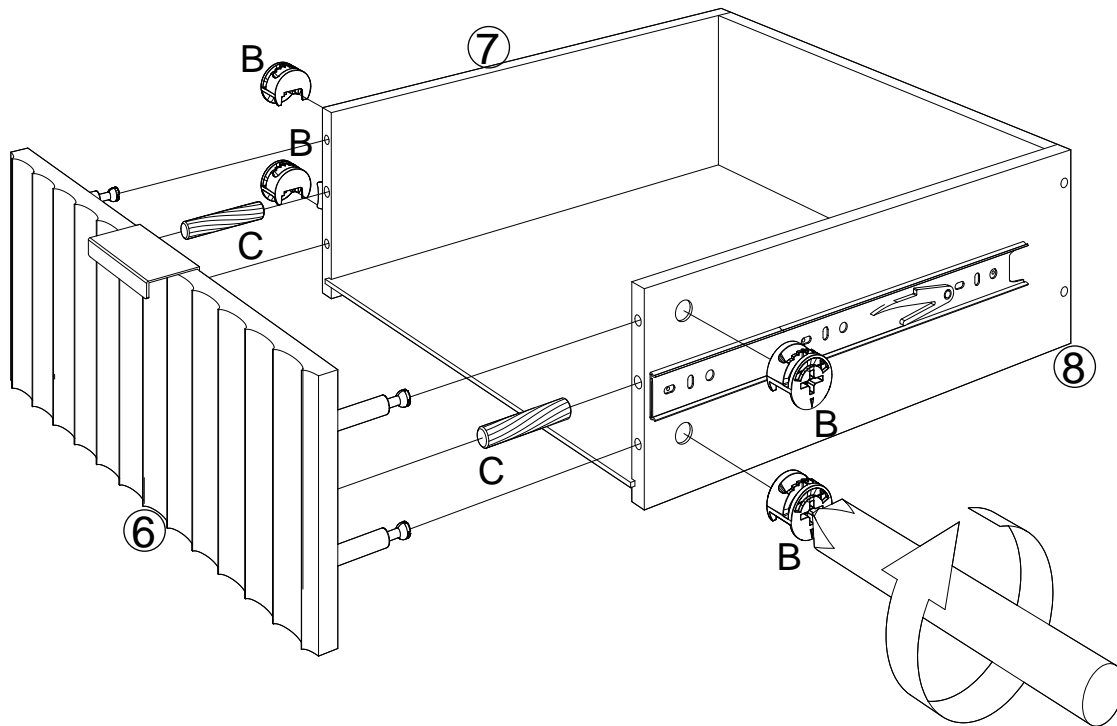

X2


STEP 16

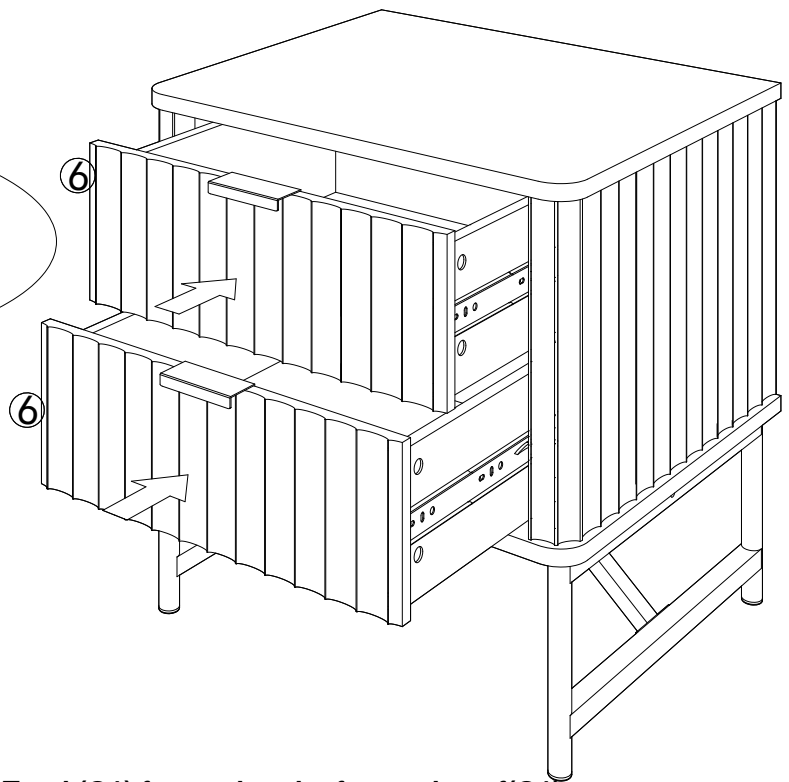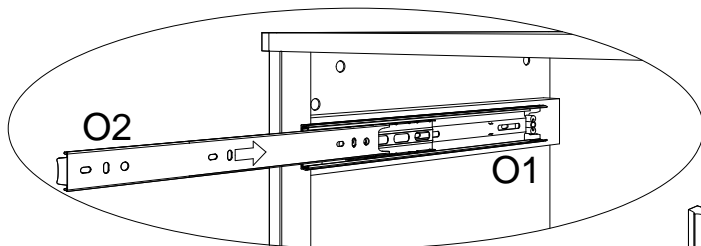

To insert Drawers:

- Bring the ball-bearing slider on Drawer Glide Track(O1) forward to the front edge of(O1).
- Align the back open-end of the Drawer Glide Runner(O2) on each side of the drawer to fit squarely into the groove on the open front-end of(O1). Be sure the drawer/O2 is not tilted or angled, and gently push in drawer squarely.
- When the drawer is pushed in about half way, the Disconnect Lever on (O2) will be engaged onto(O1) which will create a slight resistance-this is normal. Pull out the drawer a little bit and gently push in the drawer again to engage the Lever to the slide mechanism on (O1). The drawer should now slide smoothly.
- If the drawer cannot be pushed in or stuck, do not force it in. Remove the drawer and repeat the steps above.



STEP 17



LX4



KX4

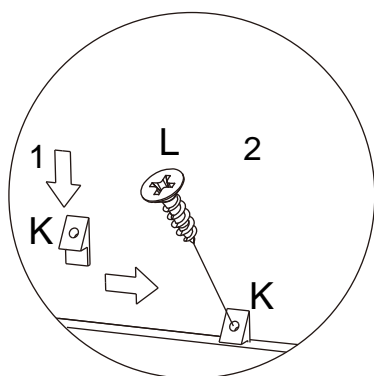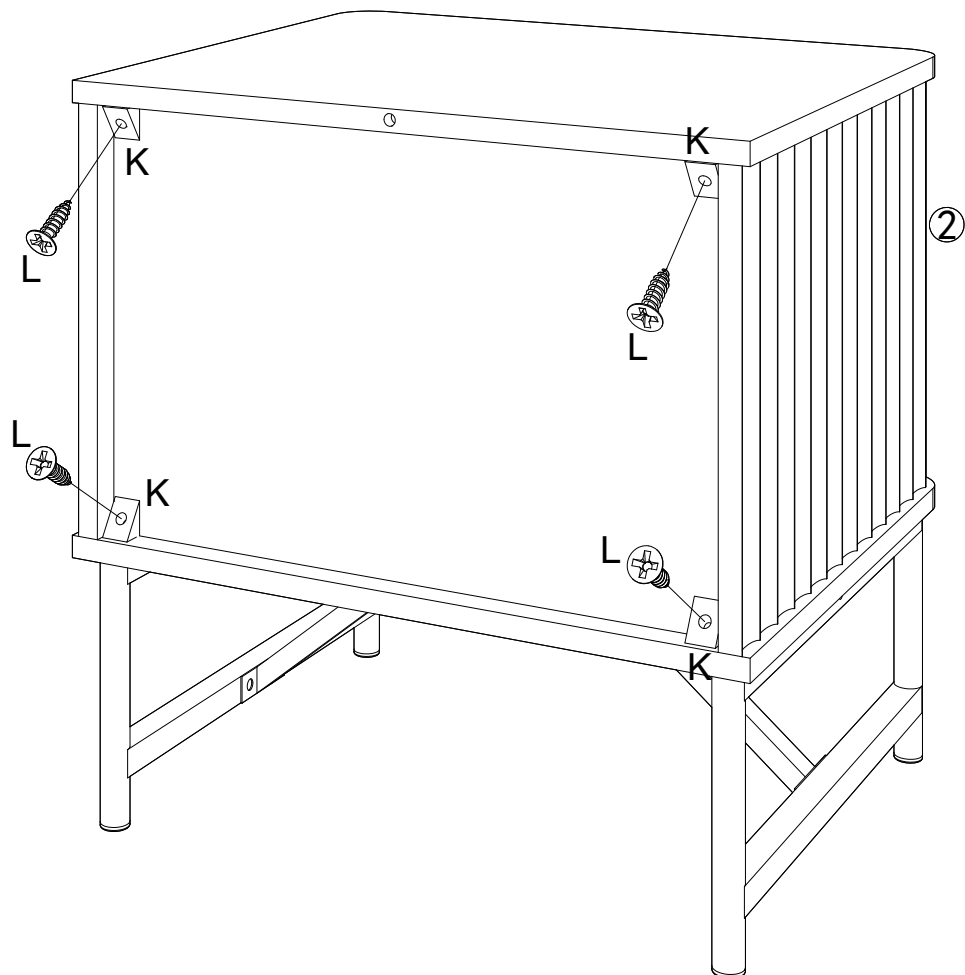

STEP 18



EX1

WALL

