


---

# Ceiling Fan With Light User Manual

No.7066

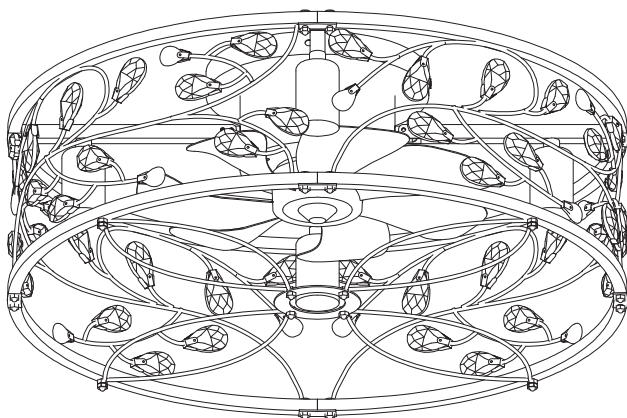

Please Scan the QR code to watch the installation video. If you have any questions, please feel free to contact us through the order page.



# Notice Before Installation

1. Not compatible with a dimmer switch. Please use a regular ON/OFF wall switch or the included remote.
2. Contact us via the order page if there are any damaged/missing parts or other questions. (Reply within 6 hours / Free replacement or partial refund)
3. It is recommended that two individuals collaborate to ensure efficient assembly of components and optimal safety.




Please Scan the QR code to watch the installation video. If you have any questions, please feel free to contact us through the order page.

## Warning!

- 1) Please install by professional.
- 2) The voltage available for ☒ AC110V ☐ AC127V ☐ AC220V ☐ AC85-265V only.
- 3) Don't install the lighting fixture under moist condition.
- 4) Please switch off the power when you clean the lighting fixture.
- 5) Keep away from acidic &corrosive material.

# Package includes


Check to see that you have received the following parts:



Hanging Bracket



screw driver



M3 wrench



S hook



Remote control




M3 screw cap




M10 screw nut




M3 screw

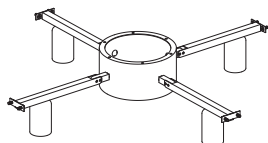


Motor+bracket




Canopy

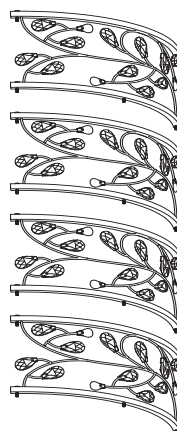

Lampshades

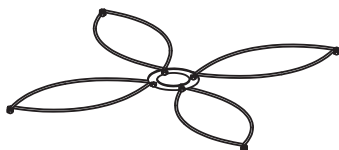

Safety cover



Blades



38#=44pcs




20#=12pcs




Paper tube

# How to assemble ?

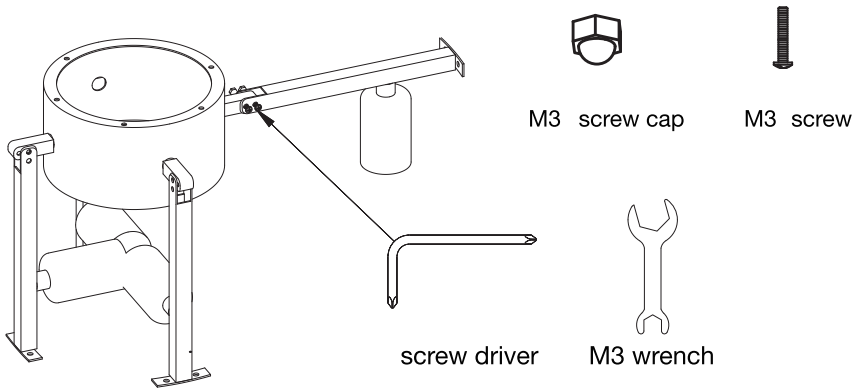


Step 1: Unfold and straighten the square tube bracket into a straight line, and secure it tightly using M3 screws and an M3 wrench.

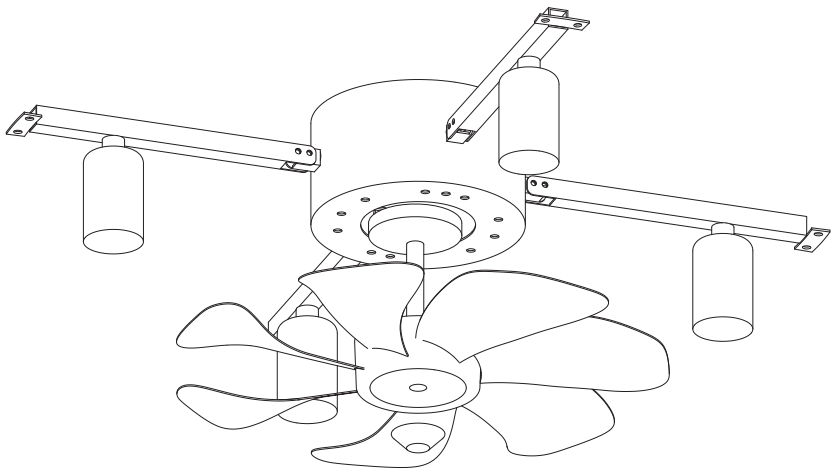


Step2: Install the blades, and fasten the blade cap anticlockwise.

# How to assemble ?

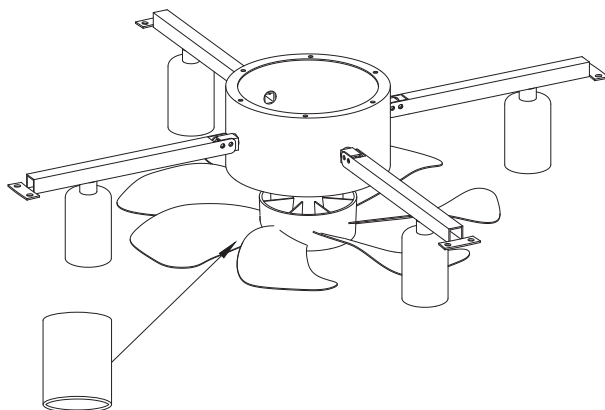


Step 3: Place the paper tube under the blades to make the subsequent installation more convenient and stable.

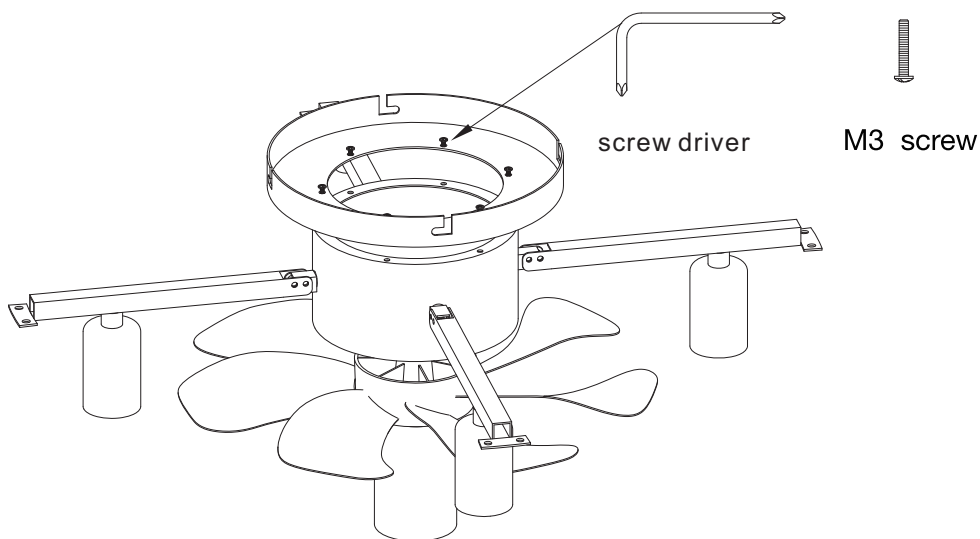


Step4: Secure the canopy with M3 screws tightly.

# How to assemble ?

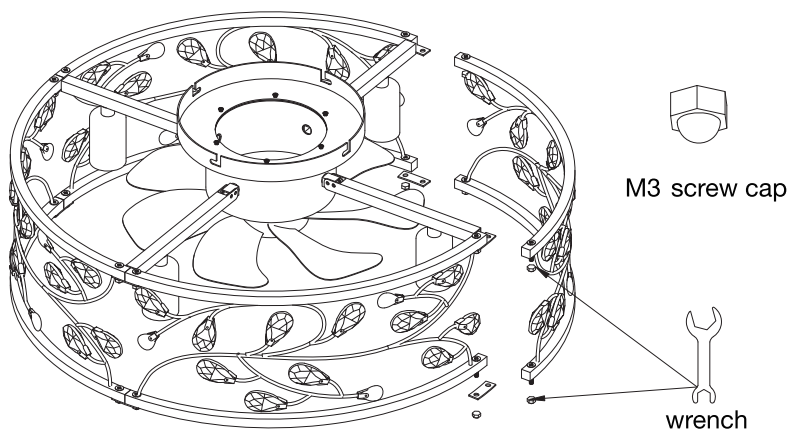


Step5: Attach the lampshades accordingly and fasten them tight.

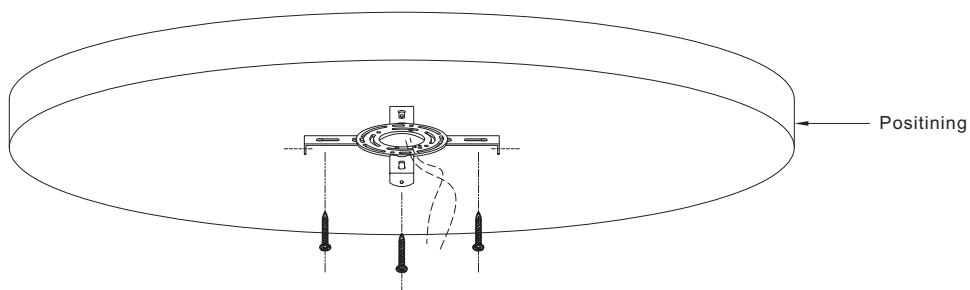


Step 6: Secure the hanging bracket onto the ceiling.


# How to assemble ?

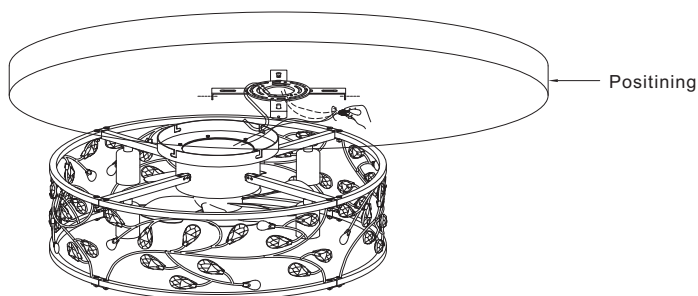

Step7: Use the hook to hang the lamp body. Turn off the power, then connect the live and neutral wires from the power supply to the corresponding wires of the lamp.

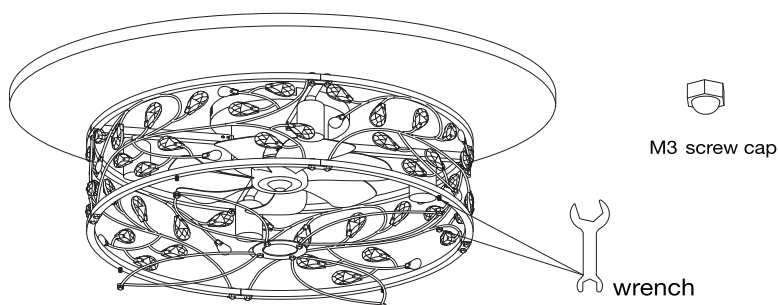


Step 8: Unfold the bottom safety cover and fix it onto the shades using M4 screws, screw caps, a wrench and a screwdriver.

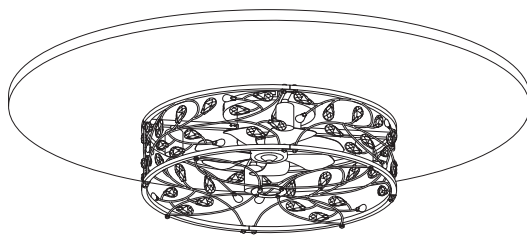

Step9: The installation is complete.

# How to Install to the ceiling ?

1. Thread the power cable to the hole of the hanging bracket.
2. Fix the bracket to the ceiling by wood or expansion screws.
3. Connect the live wire and the neutral wire of the lamp body to the power cable separately.
4. Fix the the canopy to the bracket by fastening the screws on the sides

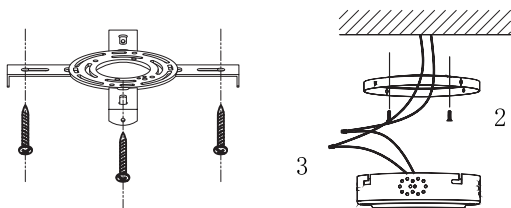

Connect the black wire to the live wire (L).  
Connect the white wire to the neutral wire (N).

## Variable Frequency Fan Lamp Remote Control Manual



### 1. Remote Control Specifications

Operating Voltage: DC 3V<sup>==</sup> (two AAA batteries)  
Transmission Frequency: 2401-2402MHz  
Modulation Method: GFSK  
Transmission Power: 6dBm  
Remote Control Range: 20 meters

### 2. Basic Functions of the Remote Control

If the remote control is temporarily unusable due to low battery, loss, or damage, the wall switch can be used to adjust the light color temperature by toggling the switch on and off repeatedly.

Note: the fan function cannot be controlled this way.

**Pairing Code:** Press and hold the [⊗Stop] button within 5 seconds after powering on. The light will flash to indicate successful pairing.

**Clear Code:** Press and hold the [Fan Speed 4 +⊗] button within 5 seconds after powering on. The light will flash to indicate successful clearing of the code.