ASSEMBLY INSTRUCTIONS




- ◆ Inspect the wire insulation for any cuts, abrasions, or exposed copper that may have resulted during shipping. If there is a defect in the wire, do not attempt installation.
- ◆ Before starting installation of this fixture or removal of a previous fixture, disconnect the power by turning off the circuit breaker or by removing the fuse at the fuse box.




If you need further assistance, please contact us by Email: customersupport@superiordecorinc.com


TOOLS REQUIRED Electrical Phillips Flat blade Wire Ladder **Pliers** alasses tape screwdriver screwdriver strippers


HARDWARE INCLUDED






Junction Box





















Mounting Unit Ball Nuts

Plastic Anchors Wood Screws

Fixture Screws


Mounting Screws

Wire Nuts


* PARTS SHOWN MAY DIFFER SLIGHTLY PER LIGHT FIXTURE


EXPLODED PARTS

INSTALLATION STEP 1




- b. Place the **fixture** in the desired position and Install **fixture** using **fixture screws**.
- c. Mark the drilling position with a pencil. Next, disassemble the **fixture**.
- d. Using a 5/16 " (8mm) drill bit (not included), drill holes in the marked areas.
- e. Insert the plastic anchors into the drilled holes.

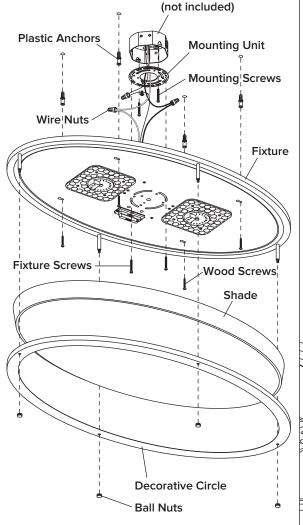

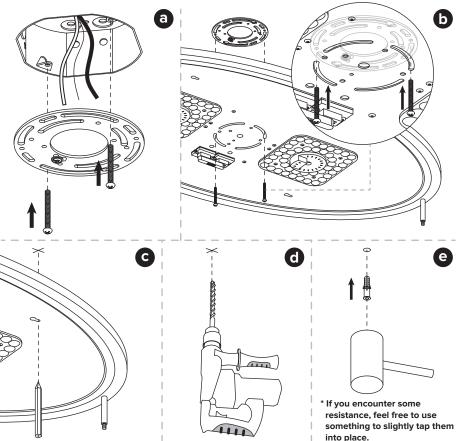

STEP 2

Make the electrical connection from the junction box (not included) to the **fixture**. Connect the ground wire to the mounting unit using the preinstalled green ground screw. Next, connect the live wire, neutral wire and ground wires with the supplied wire nuts. Secure with electrical tape.

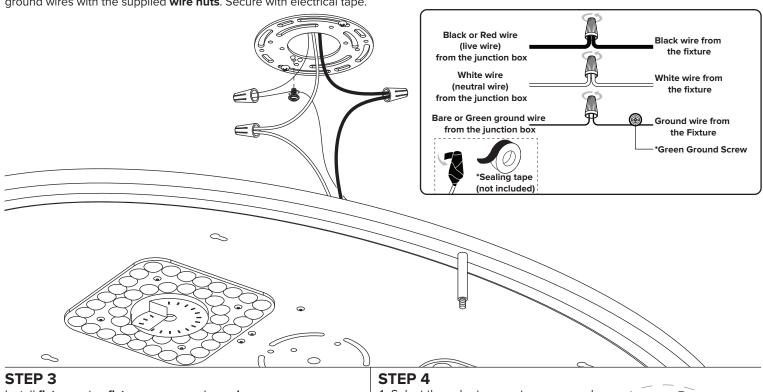

Install fixture using fixture screws and wood screws.

