

WALL MOUNTED KITCHEN FAUCET


Installation instruction



No. Description


A	Faucet Body
B	Z-shaped Flex-FOOT
C	Mounting Screw Nut

No disassembling X

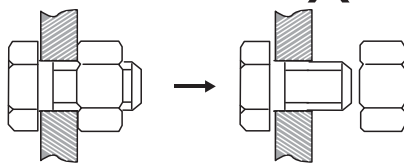

This product has been inspected and debugged by the factory to the best condition. Please do not disassemble and assemble it yourself.

Cleaning pipes



Before installing the faucet, please be sure to remove sundries and sludge from the water pipe to prevent sundries from blocking the faucet.


CLEANING CARE




In order to keep the appearance of product clean, bright and good performance, please take care of the product as follows;

1. Rinse with water only and dry with soft cotton cloth;
2. Use mild liquid and colorless glass cleaner to remove surface dirt and scale film, or use polish without abrasive effect;
3. Do not use abrasive detergent, polish, emery cloth, paper towel or scraper, etc;
4. Do not use acid cleaner, or cleaner and soap with insoluble gran etc;
5. In the process of use, mud may accumulate in the bubbler and make the water flow slow. The bubbler can be unscrewed, rinsed with water, and then installed back in place.


INSTALLATION STEPS

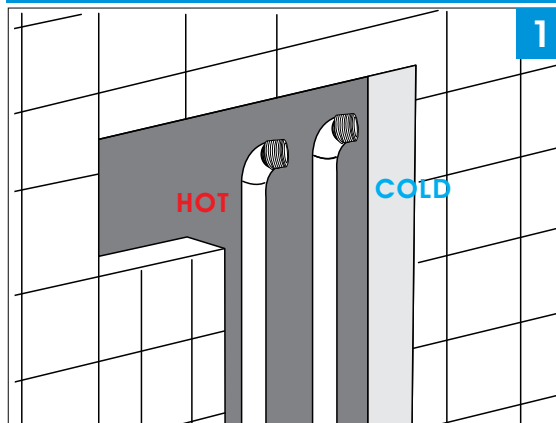


Dig an embedded groove in the wall according to the depth of water supply system. After installing the hot & cold water supply pipes, turn on the valve to check if there is leakage.

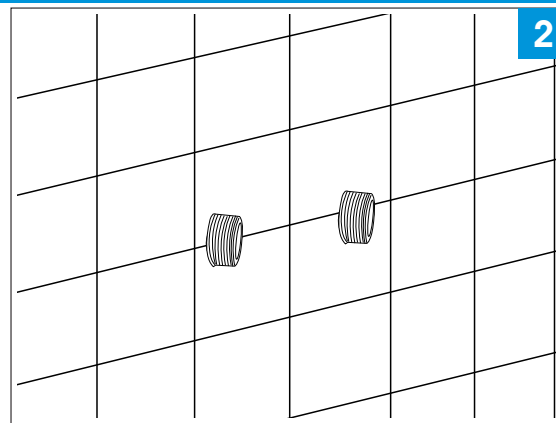


Cover the pipeline with cement and ceramic tile.

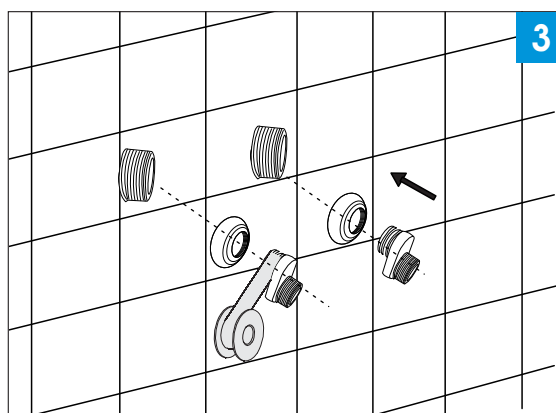


Wrap the Z-shaped Flex-Foot with tape. Install the Mounting Screw Nut and the Z-shaped Flex-Foot.

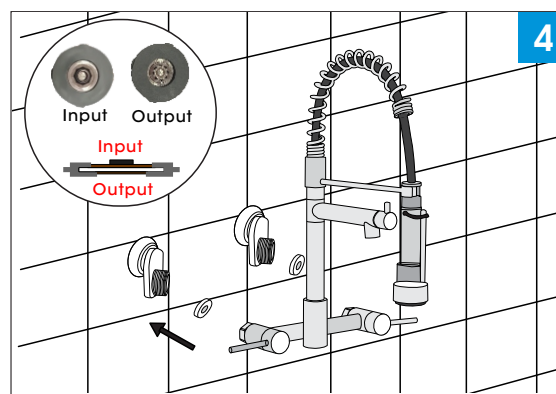

Put the O-ring Washer in hex nut on the faucet, then install the faucet body with wrench. If you reside in the California area, you need to use a flow restrictor disc instead of a washer in the faucet to reduce water flow. Refer to the image for proper placement.

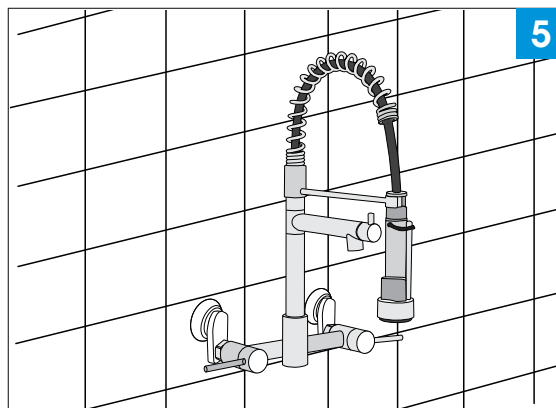

The installation is complete.

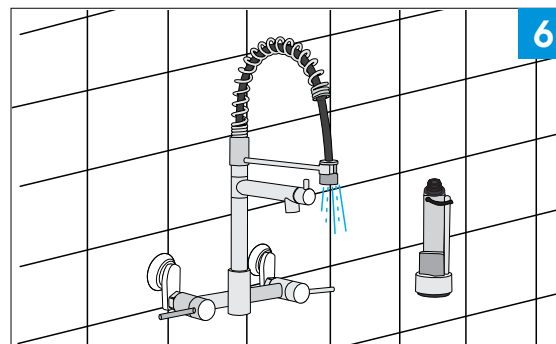

Remove the spray head from the spout on the faucet body to flush the water lines. Turn on the water supply and allow both hot and cold water to run for at least one minute to flush away any debris that could cause damage to internal parts. While the water is running, check for leaks. If a leak occurs, gently tighten the nut on the connection that is leaking. Turn off the water and screw the spray head back onto the spout of the faucet body.