


FR	2	G		D			R	E
----	---	---	--	---	--	--	---	---

Features			
Controls	Ready-Select™		
Surface Type	Brushed Chrome (S), Porcelain (W)		
Right Front Element (Watts)	8" - 2,100		
Right Rear Element (Watts)	6" - 1,250		
Left Front Element (Watts)	6" - 1,250		
Left Rear Element (Watts)	8" - 2,100		
Hot-Surface Indicator Light	Yes		
Control Location	Front Left		
Knob Color	Black (S), Color-Coordinated (W)		
Knob Type	Plastic		
Bowl Type	Chrome		
Certifications			
A.D.A. Compliant ¹	Yes		
Specifications			
Power Supply Connection Location	Left Side		
Voltage Rating	240V/208V/60Hz		
Connected Load (kW Rating) @ 240/208 Volts²	6.7/5.0		
Amps @ 240/208 Volts	22.3/19.2		
Minimum Circuit Required (Amps)	30		
Approved for Electric Single Wall Oven Combination Installation	No		
Shipping Weight (Approx.)	30 Lbs.		

When properly installed, meets the appliance standards in the Americans with Disabilities Act and the Architectural Barriers Act Accessibility Guidelines as published by the United States Access Board on June 23, 2004, as amended August 5, 2005.

²Single phase 3- or 4-wire cable, 120/240 or 120/208 Volt, 60 Hertz AC only electrical supply with ground required on separate circuit fused on both sides of line.

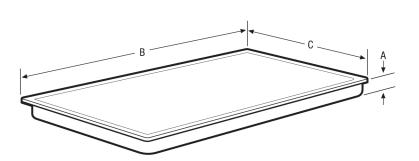

NOTE: Always consult local and national electric codes. Refer to Product Installation Guide for detailed installation instructions on the web at frigidaire.com.



Product Dimensions		Cutout Di
A-Height	3-3/4"	Height
B-Width	32-1/4"	Width (Min
C-Depth	20-1/4"	Width (Ma
		Donth (Min

Cutout Dimensions	
Height	5-3/4"
Width (Min.)	31"
Width (Max.)	31-1/4"
Depth (Min.)	19"
Depth (Max.)	19-1/4"

Granite Countertop Installation Kit available.