



# WaterTile® | K-8002

Square 54-nozzle single-function body spray, 2.5 gpm

## Features

- Single-function 54-nozzle body spray delivers a soothing spray
- 2.5 gpm (9.5 lpm) maximum flow rate
- Fully adjustable sprayface pivots for targeted hydromassage
- MasterClean™ sprayface features an easy-to-clean surface that withstands mineral buildup and maximizes spray performance
- Low-profile design complements any decor
- 1/2" NPT connection



## Available Colors/Finishes

*Color tiles intended for reference only.*

|     |                               |
|-----|-------------------------------|
| CP  | Polished Chrome               |
| SN  | Vibrant Polished Nickel       |
| AF  | Vibrant French Gold           |
| BN  | Vibrant Brushed Nickel        |
| BV  | Vibrant Brushed Bronze        |
| BL  | Matte Black                   |
| 2MB | Vibrant Brushed Moderne Brass |
| BX  | Vibrant Brazen Bronze         |
| TT  | Vibrant Titanium              |
| BGP | Vibrant Brushed Graphite      |



1-800-4KOHLER (1-800-456-4537)  
Kohler Co. reserves the right to make revisions without notice to product specifications.  
For the most current specification sheet, go to [www.kohler.com](http://www.kohler.com) USA or [www.kohler.ca](http://www.kohler.ca) Canada.  
3-27-2026 14:1 - US-CA

THE BOLD LOOK  
OF **KOHLER**

---

## Codes/Standards

ASME A112.18.1/CSA B125.1

---

## Material

- KOHLER finishes resist corrosion and tarnishing
- 

## Recommended Products/Accessories

K-23723 Faucet cleaner

---

## Warranty

*See website for detailed warranty information.*

KOHLER® Faucet Lifetime Limited Warranty




1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current specification sheet, go to [www.kohler.com](http://www.kohler.com) USA or [www.kohler.ca](http://www.kohler.ca) Canada.

3-27-2026 14:1 - US-CA

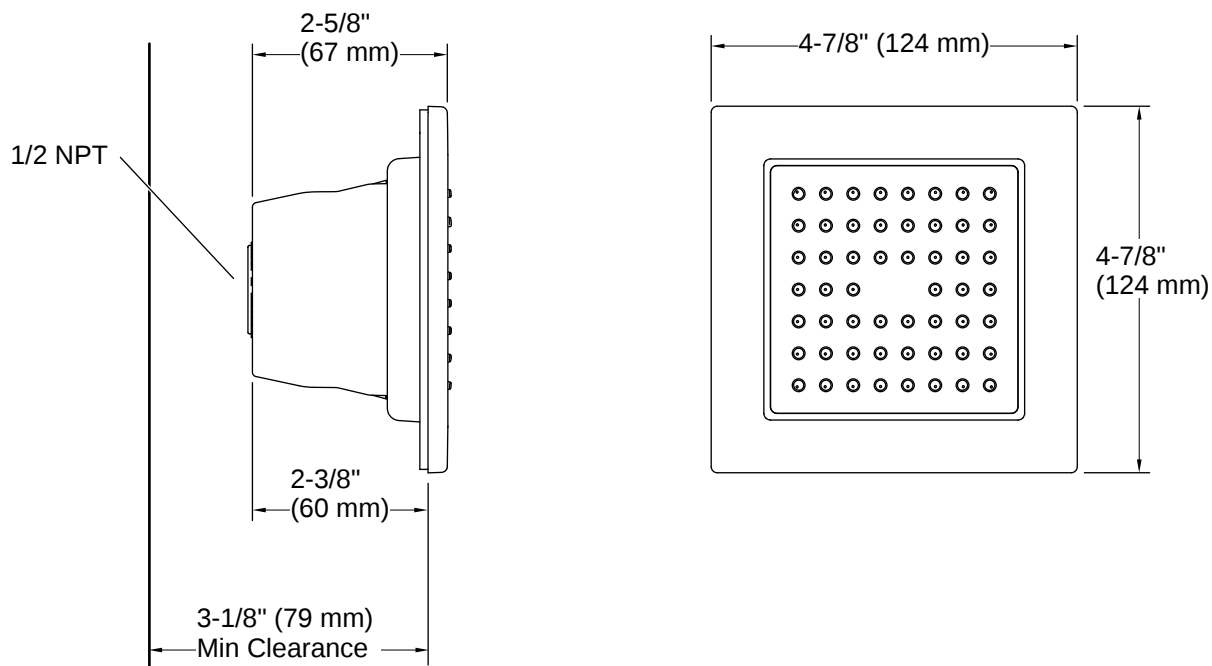

## Installation

- Wall-mount

## Installation Notes

*Install this product according to the installation instructions.*

For use with automatic compensating valves rated at 2.5 gal/min (9.5 l/min) or less.

