

ASSEMBLY INSTRUCTIONS



CAUTION

◆ Inspect the wire insulation for any cuts, abrasions, or exposed copper that may have resulted during shipping. If there is a defect in the wire, do not attempt installation.

◆ Before starting installation of this fixture or removal of a previous fixture, disconnect the power by turning off the circuit breaker or by removing the fuse at the fuse box.

✉ If you need further assistance, please contact us by Email: customersupport@superiordecorinc.com

TOOLS REQUIRED



Ladder



Safety glasses



Electrical tape




Phillips screwdriver



Flat blade screwdriver




Pliers



Wire strippers

HARDWARE INCLUDED



Fixture



Shade



Decorative Circle




Ball Nuts A



Ball Nut B



Washer



Mounting Unit




Mounting Screws



Wire Nuts

*PARTS SHOWN MAY DIFFER SLIGHTLY PER LIGHT FIXTURE


EXPLODED PARTS

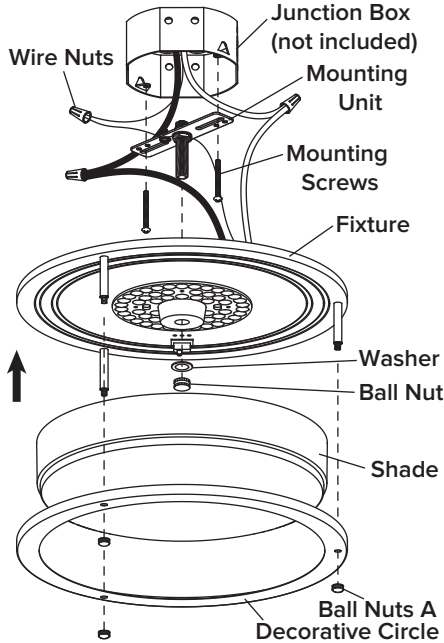

INSTALLATION


STEP 1

1. Unscrew the **washer** and **ball nut** from the **mounting unit**.
2. Adjust threaded rod on **mounting unit** to allow **fixture** to rest flush against the ceiling when **ball nut** is tightened.
3. Use the **mounting screws** to attach the **mounting unit** to the junction box (not included).

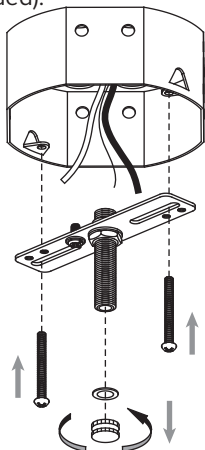



STEP 2

Disassemble the **decorative circle** and **shade** under the **fixture** by unscrewing **ball nuts A**.

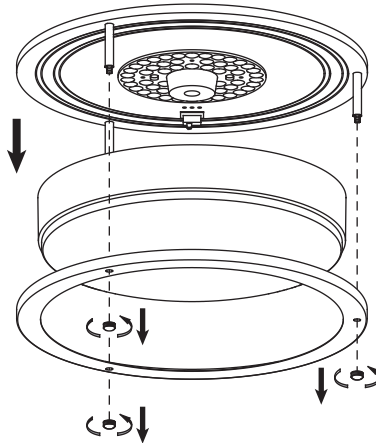


STEP 3

Make the electrical connection from the junction box (not included) to the **fixture**. Connect the ground wire to the **mounting unit** using the preinstalled green ground screw. Next, connect the positive, negative and ground wires with the supplied **wire nuts**. Secure with electrical tape.

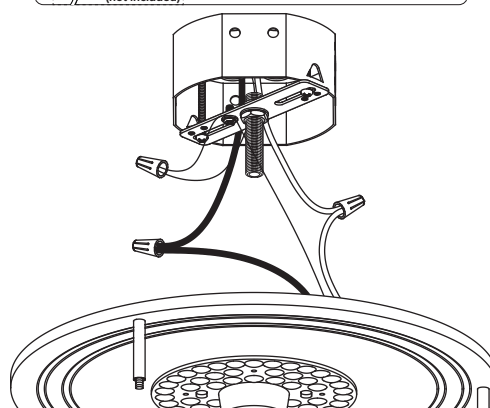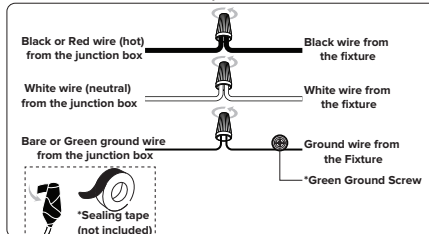


STEP 4

Secure the **fixture** to the **mounting unit** with the **washer** and **ball nut**.

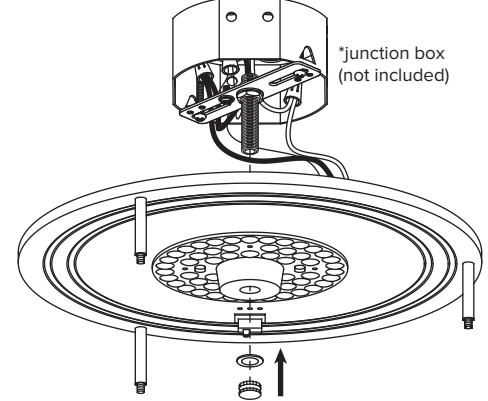

STEP 5

Select the color temperature you need.

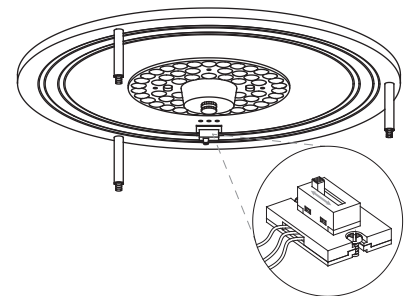

STEP 6

Use the **ball nuts A** to attach the **shade** and **decorative circle** to the **fixture**.

