


Location:



5896TRM
Tub/Shower System
Specification Submittal

Model Numbers

- 5896TRM**
Tub/Shower System, Temptrol Pressure Balancing
Shower Valve ordered separately
- Valve Options:**
 - 261 Series Temptrol Shower Valve with TRM modifier
 - 161 Series Temptrol SHower Valve requires TC modifiers
 - 3DIVBODYSRT

Feature Highlights

- Adjustable stop screw to limit handle rotation
- 30" Slide bar
- Three function diverter body sold separately
- Non-diverter tub spout
- 60" flexible metal hose
- 7-Mode, NSPO hand shower wand
- 7-Mode, NPSO Showerhead
- Standard 2.0 gpm (7.6 L/min) flow restrictor
- Components made from metal and nonmetal materials, plated in standard polished chrome finish
- Valves to be ordered separately
- Available with TA-10 flow control spindle and T-12A cap assembly for Temptrol valve bodies installed with Test Cap (order p/n 5896TRMTC)

Compliance

- ASME A112.18.1/CSA B125.1
- WaterSense 1.5 gpm (5.7 L/min) 2.0 gpm (7.6 L/min)
- Lever handle meets ADA requirements



Modifications

- 15** 1.5 gpm (5.7 L/min) flow restrictor
- L1** Less showerhead
- L2** Less hand shower
- L3** Less showerhead and hand shower
- L4** Less showerhead, shower arm & flange
- L5** Less hand shower system (less bar/ cradle, hose, wand and elbow)
- L6** Not applicable instead order 5895
- L7** Less handle
- STN** Satin Nickel finish
- MB** Matte Black finish
- BBZ** Brushed Bronze finish
- TC** Test Cap Trim (includes TA-10&T-12A) used with 16 series Temptrol Valve

Note: Append appropriate suffix to model number.

Warranty

Limited Lifetime - to the original end purchaser in consumer/residential installations.
10 Years - for commercial/industrial installations. Refer to www.symmons.com/warranty for complete warranty information.



SKU Builder


Series	Finish	Modifier	Flow Rate	Trim (required)	Test Cap	Final SKU
5896	MB	L3		TRM	TC	5896MBL3TRMTC
5896	MB			TRM		5896MBTRM

Note: No more than two modifiers (L1-L7) and modifier order will follow numerical order.

Architectural/Engineering Specification

Symmons Braston® Tub/Shower System _____ Includes Adjustable stop screw to limit handle rotation, 30" Slide bar, Three function diverter body sold separately, Non-diverter tub spout, 60" flexible metal hose, 7-Mode, NSPO hand shower wand, 7-Mode, NPSO Showerhead, Standard 2.0 gpm (7.6 L/min) flow restrictor, Components made from metal and nonmetal materials, plated in standard polished chrome finish, Valves to be ordered separately, Available with TA-10 flow control spindle and T-12A cap assembly for Temptrol valve bodies installed with Test Cap (order p/n 5896TRMTC). 10 Year Commercial Warranty. ASME A112.18.1/CSA B125.1 and WaterSense 1.5/2.0 complaint, Lever handle meets ADA requirements. Available options: "15 - 1.5 gpm (5.7 L/min) flow restrictor", "L1 - Less showerhead", "L2 - Less hand shower", "L3 - Less showerhead and hand shower", "L4 - Less showerhead, shower arm & flange", "L5 - Less hand shower system (less bar/ cradle, hose, wand and elbow)", "L6 - Not applicable instead order 5895", "L7 - Less handle", "STN - Satin Nickel finish", "MB - Matte Black finish", "BBZ - Brushed Bronze finish", "TC - Test Cap Trim".

Dimensions

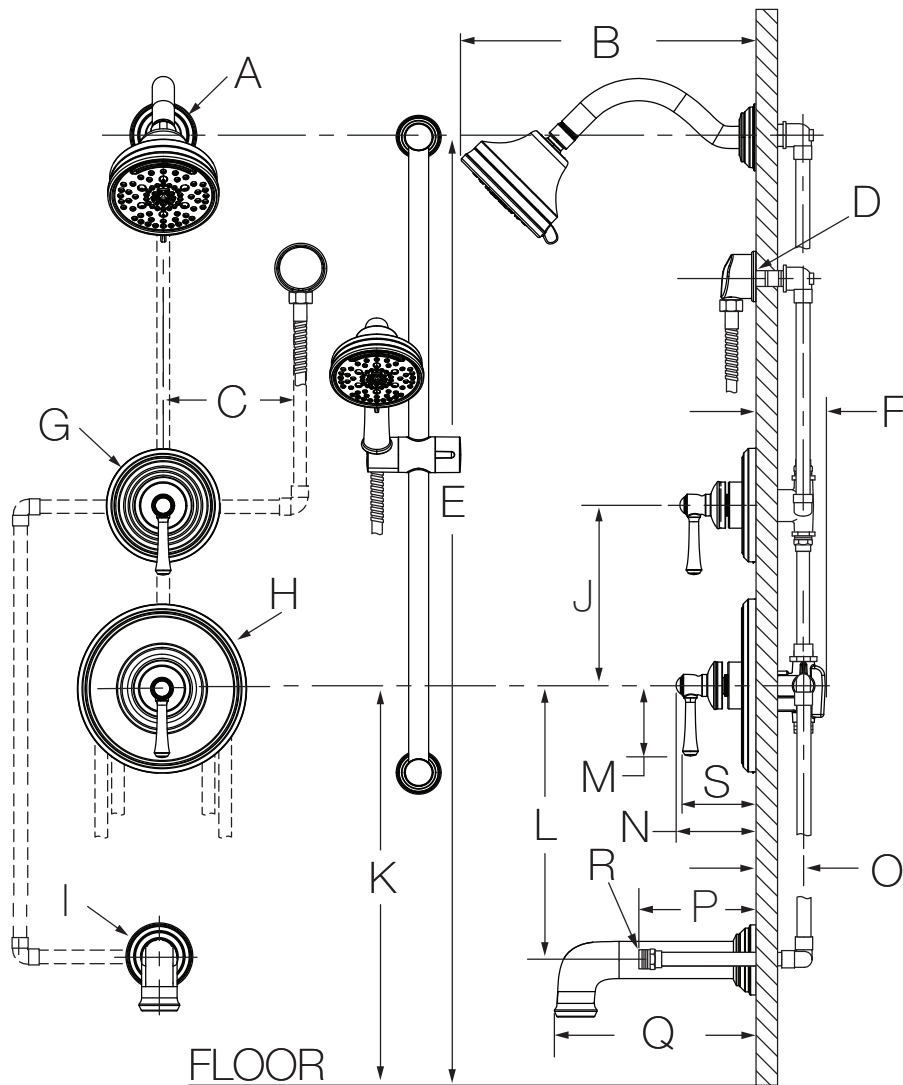

Measurements	
A	Ø 2-3/8", 62 mm
B	10-13/16", 275 mm
C	6", 152 mm
D	Male 1/2-14 NPT thread must be recessed 1/4" (6 mm) from finished wall
E	Ref. 77", 1956 mm
F	4-3/4", 121 mm
G	Ø 5", 127 mm
H	Ø 7-1/2", 191 mm
I	Ø 2-7/16", 62 mm
J	Ref. 10", 254 mm
K	Ref. 32", 813 mm
L	Ref. 12", 305 mm
M	3-1/16", 77 mm
N	3-3/8", 85 mm
O	Rough-in 2-3/8" ± 1/2", 60 mm ± 13 mm
P	5-1/2", 140 mm
Q	7-1/16", 179 mm
R	Male 1/2-14 NPT fitting must protrude 5-1/2" (140 mm) from finished wall
S	3-1/16", 78 mm

Notes:

- 1) Valve body and piping not included and shown as reference only.
- 2) Plaster shield (p/n T-176) for dry wall, plaster or other type walls 1/2" or greater.
- 3) All dimensions measured from nominal rough-in (see M as reference).
- 4) Dimensions subject to change without notice.