



4.Fix the Canopy

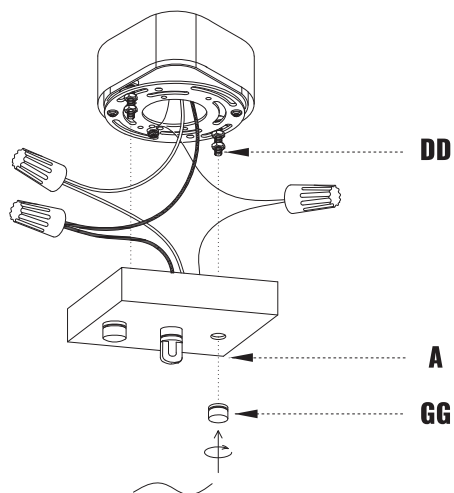

Fix the Canopy (A) onto the Mounting Bracket with Cap Nuts (GG).

INSTALL BULBS

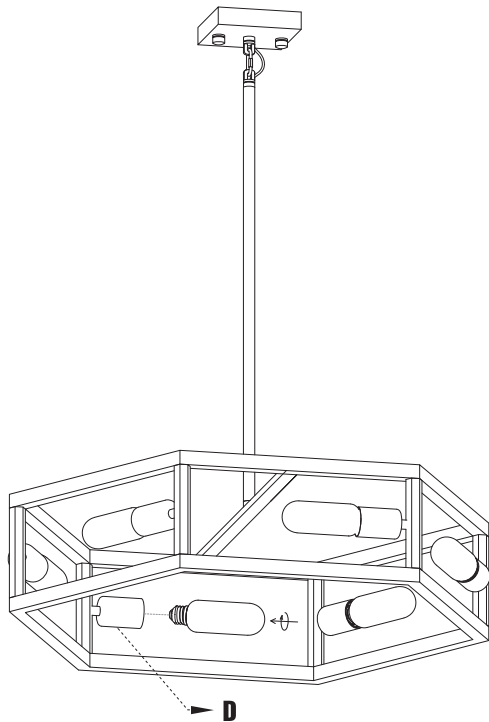


Install the E26bulbs (not included).

**NOTE :**  
This lamp uses E26bulbs base and can only be used in conjunction with LED bulbs up to 6W. Fully dimmable when used with dimmable bulbs and compatible dimming switches (not included).

# INSTALLATION MANUAL

**CHANDELIER**  
Model No.: HLP372BL-6A

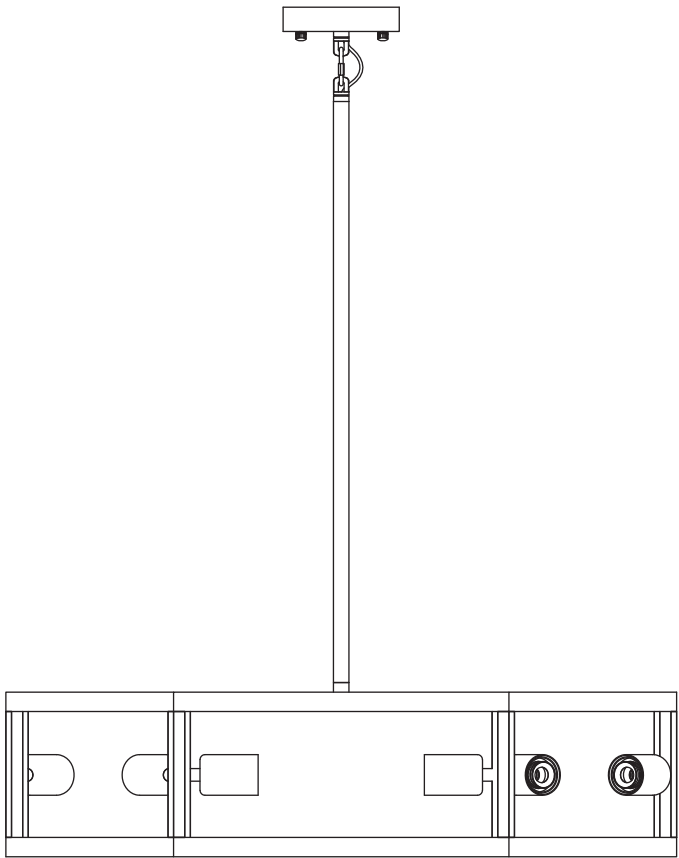


**TOOLS REQUIRED**




Ladder



Pliers




Wire Strippers








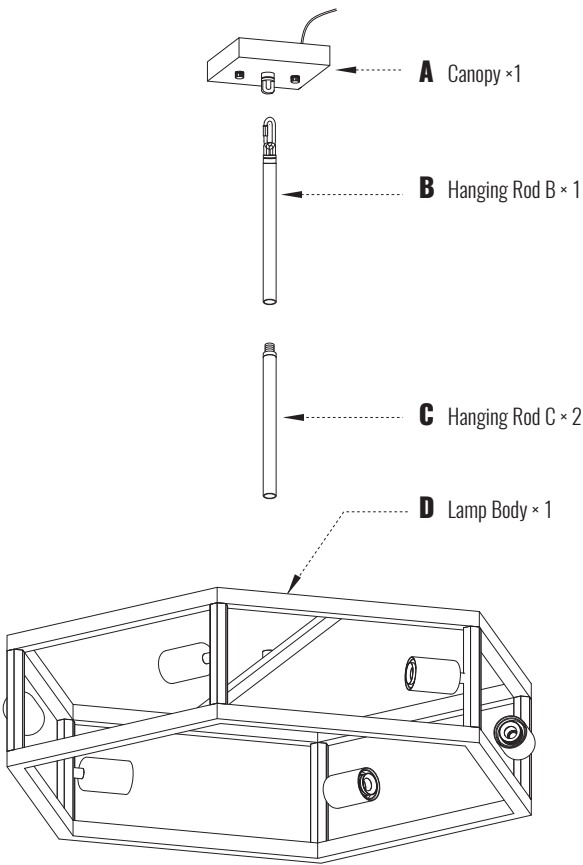


Screwdrivers

PACKING LIST




INSTALLATION KIT

<b>AA</b>  Mounting Bracke	1×	<b>BB</b>  Ground Screw	1×	<b>CC</b>  Outlet Box Screw	3×
<b>DD</b>  Machine Screw	2×	<b>FF</b>  Hex Nut	4×	<b>GG</b>  Cap Nut	2×
<b>HH</b>  Wire Nut	3×	<b>II</b>  Gloves	1×		

**NOTE:**  
1. AA/BB/DD/FF/GG have already been pre-installed together with Canopy (A).  
2. CC have one spare part for back-up.


MOUNTING AND WIRE

1. Install the Mounting Bracket

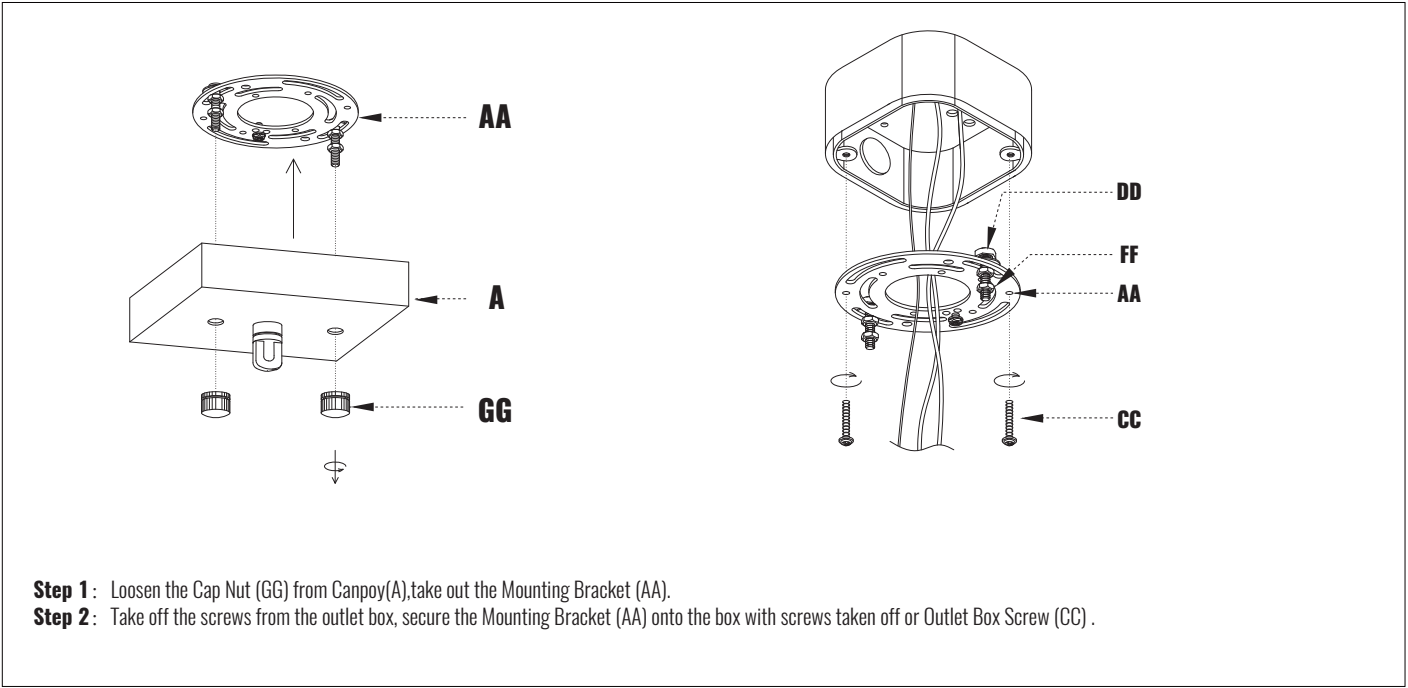


**Step 1:** Loosen the Cap Nut (GG) from Canpoy(A),take out the Mounting Bracket (AA).  
**Step 2:** Take off the screws from the outlet box, secure the Mounting Bracket (AA) onto the box with screws taken off or Outlet Box Screw (CC) .

2. Pass the wires

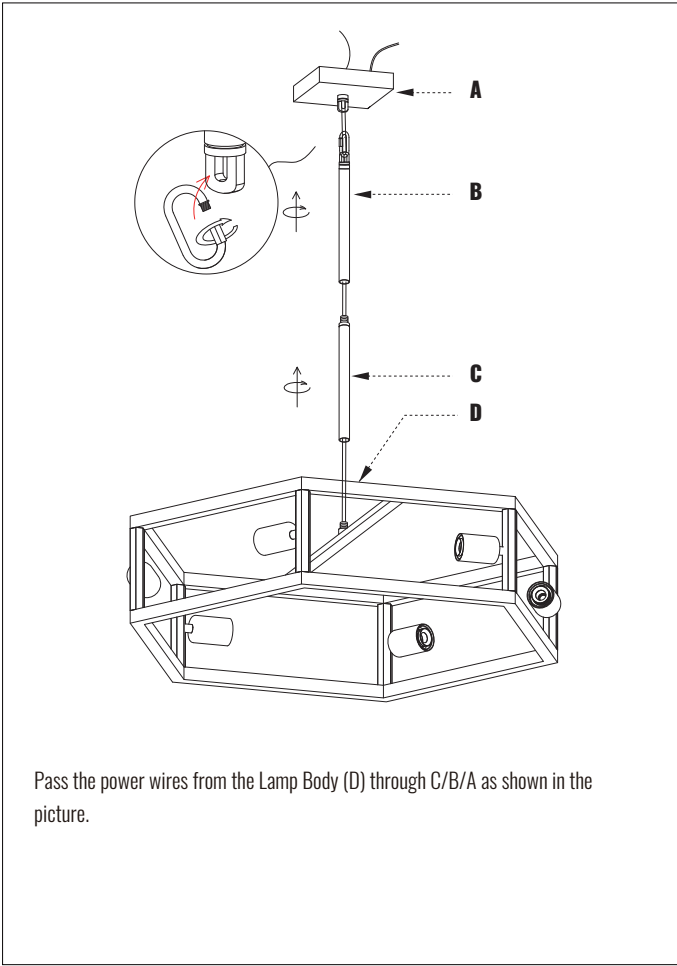

Pass the power wires from the Lamp Body (D) through C/B/A as shown in the picture.

3.Connect the wires

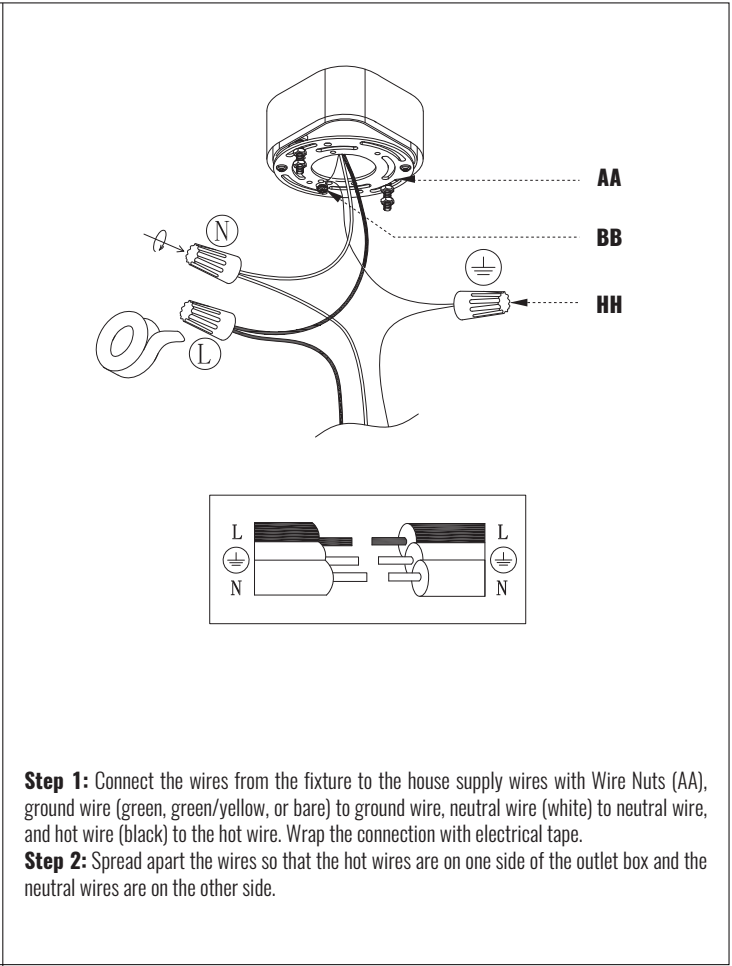

**Step 1:** Connect the wires from the fixture to the house supply wires with Wire Nuts (AA), ground wire (green, green/yellow, or bare) to ground wire, neutral wire (white) to neutral wire, and hot wire (black) to the hot wire. Wrap the connection with electrical tape.  
**Step 2:** Spread apart the wires so that the hot wires are on one side of the outlet box and the neutral wires are on the other side.