


ASSEMBLY INSTRUCTIONS

TEAK ROCKER WITH CUP HOLDER

IT-130870T

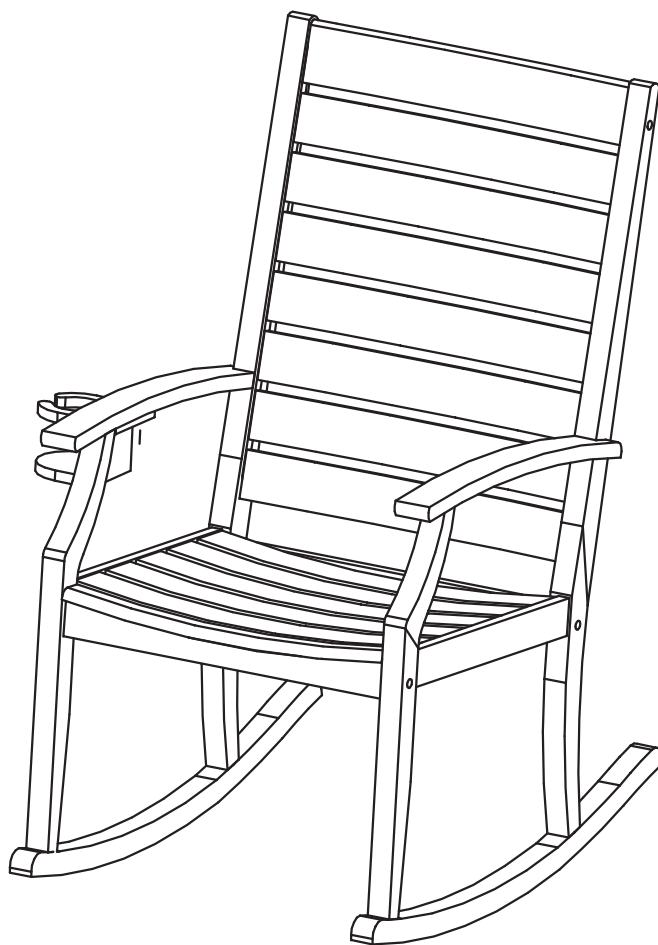

CUSTOMER SERVICE INFORMATION

Please do not return to the store. If any pieces are missing call our toll free number at 1-888-287-4275 from 9:00 am to 5:00 pm CST (Monday to Friday) for replacement parts. For faster service, have the style number handy when calling.


GENERAL INFORMATION & TIPS

1. Please read the assembly instructions prior to assembling the Rocker.
2. To avoid damage, assemble the rocker on a non-abrasive surface such as carpet.
3. Make sure all bolts tightly fastened before the rocker is used.
4. This rocker is not for commercial use.










Please make sure you have all parts before beginning assembly. Please wait until all steps are completed before tightening bolts.

TOOLS REQUIRED


1. 8" Philips screwdriver (Not provided).
- For tightening all bolts and screws.
2. Rubber Mallet (Not provided).
- For tapping in the wooden caps.



PARTS AND HARDWARE LIST


A1. Right side frame	A2. Left side frame	B. Back rest	C. Seat
			
Qty : 1 Pc	Qty : 1 Pc	Qty : 1 Pc	Qty : 1 Pc
D. Rocker	E. Cup holder	F. 1" Bolt	G. 1 1/2" Bolt
			
Qty : 2 Pcs	Qty : 1 Pc	Qty : 4 Pcs + 1	Qty : 8 Pcs + 1
H. Wooden cap			
			
Qty : 6 Pcs +1			

STEP 1

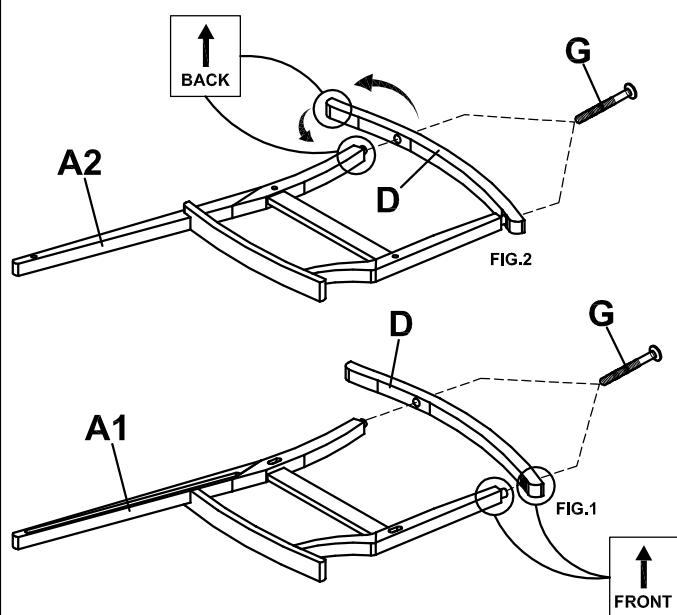


Attach each Rocker (D) to Right and Left side frame (A1 & A2), as picture shown, connecting front of rockers to front legs first then the back of rockers. Secure connections with 1 1/2" Bolts (G).

STEP 2

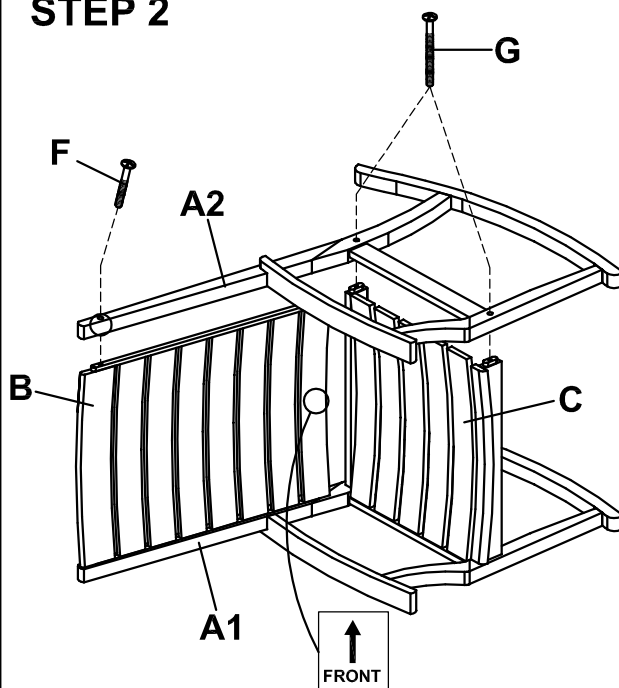


Install Back support (B) and Seat (C) into corresponding holes of Right side frame (A1). Attach the Left side frame (A2) onto Back support (B) and Seat (C). Secure Left side frame (A2) using 1" Bolt (F) and 1 1/2" Bolts (G), as shown.

STEP 3

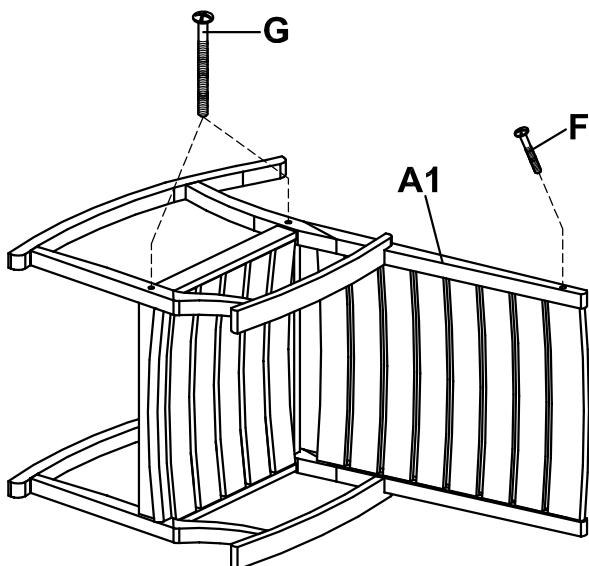

Invert the Rocker and repeat the step 2 procedure to secure the Right Side frame (A1).

STEP 4

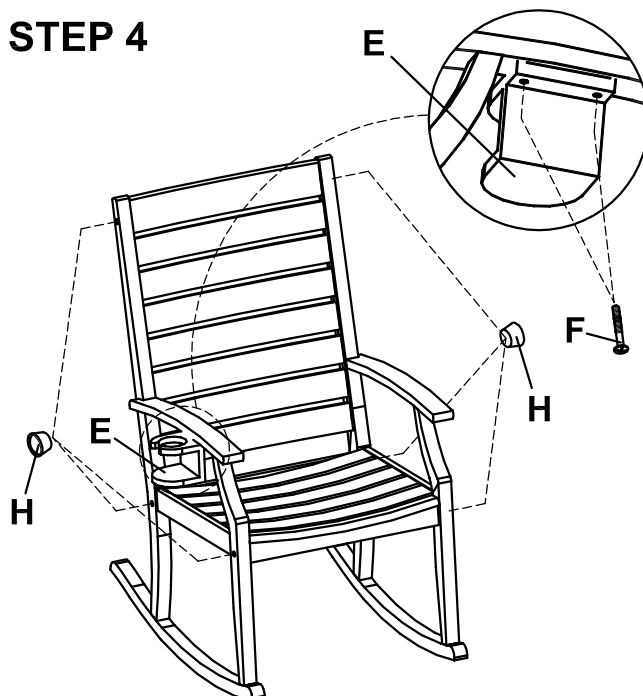

Upright the Rocker. Attach Cup holder (E), secure using 1" Bolt (F), then make sure all parts are correctly connected and tighten all bolts completely using screwdriver. Tap in the Wooden caps (H) to cover bolts head using rubber mallet.

CONGRATULATION !
THE ROCKER IS NOW READY FOR USE