

Installation Instructions

LED FULL CUT OFF WALL PACK LIGHT


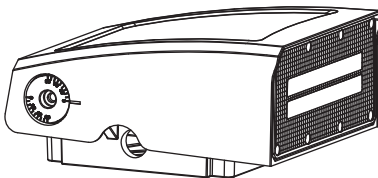


WARNING


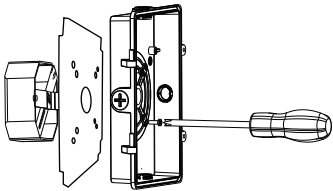
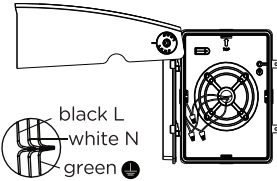

1. To avoid electric shock, disconnect power at source prior to installation.
2. The installation should be performed by qualified electricians or lighting technicians.
3. Before conducting any installation, maintenance, or removal, disable all power to the luminaires and wait until the fixture cool down.
4. Do not touch the fixture while it is in service.
5. If there is any problem with the fixture, DO turn off power and DO NOT attempt repair unless you are a qualified technician or the customer service member.

TECHNICAL SPECIFICATION:


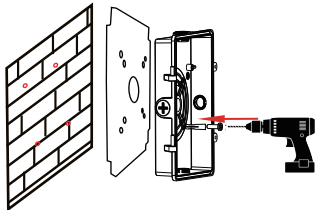
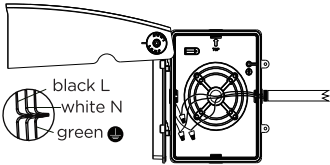

- ★ Input Voltage: 100-277VAC
- ★ Luminous Efficacy: up to 120lm/w
- ★ Color Rendering Index: >70Ra
- ★ LED Type: LM80 SMD2835
- ★ Operating Temperature: -22°F TO +122°F
- ★ Ingress Protection: IP65
- ★ Impact Rating: IK08



Junction box Mounting:

 <p>1. Adjust light head to suitable position and loosen screws to open the back of the fitting.</p>	 <p>2. Use the supplied gasket for a weather tight seal. Remove 1/2" plug in center for wiring, the fixture supports standard 3 1/4" and 4" Junction box. Attach the back plate on the wall using supplied plastic anchors and screws.</p>
 <p>3. Finish wiring (Black for Line, White for Neutral and Green for Ground).</p>	 <p>4. Close the back of the fitting and adjust the light head angle to suitable position.</p>

Conduit Mounting:

 <p>1. Adjust light head to suitable position and loosen screws to open the back of the fitting.</p>	 <p>2. Remove 1/2" plug from where you intend to feed conduit. Use the supplied gasket for a weather tight seal. Attach the back plate on the wall using supplied plastic anchors and screws.</p>
 <p>3. Finish wiring (Black for Line, White for Neutral and Green for Ground).</p>	 <p>4. Close the back of the fitting and adjust the light head angle to suitable position.</p>



The installer is responsible for ensuring the fixings / ceiling is to type suitable to support the luminaire weight.

Luminaire must be operated within an ambient fixture temperature of -22°F TO +122°F to comply with all safety and warranty regulations. Ensure sufficient air flow around the for efficient heat dissipation. Failure to do so could significantly reduce luminaire life and/or safety/warranty regulations.

NOTE: Installation of LED luminaire with modification to the unit, or incorrect fitting in accordance with the above instructions could result in damage/failure of the luminaire, which may invalidate warranty.

MANUFACTURER'S GUARANTEE

This product is guaranteed in the country of purchase for the number of years as stated from the date of purchase. The guarantee is invalid in the case of improper use, installation, tampering, removal of the Q.C. date label, installation in an improper working environment or installation not in accordance with the advised instructions and/or national wiring regulations. Should this product fail during the guarantee period it will be replaced free of charge, subject to correct installation and return of the faulty unit. We not accept responsibility for any installation costs associated with the replacement of this product. This warranty is in addition to the statutory rights in your country of purchase and reserve the right to alter specifications without prior notice.