

FP0380-3GD Installation Instructions

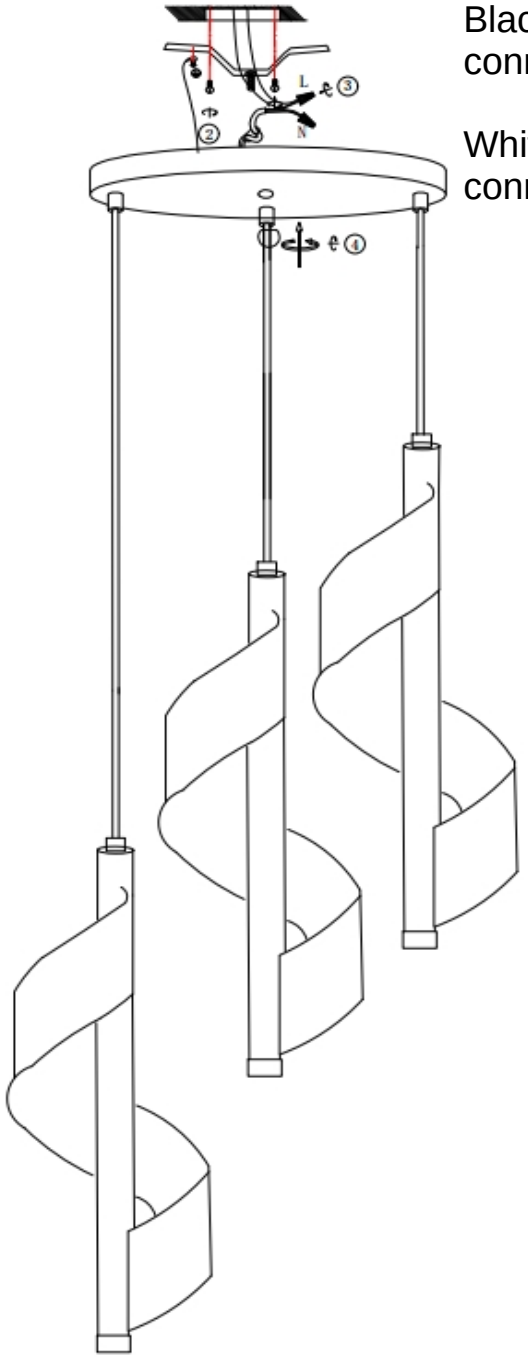

Black wire (or brown wire): connect to the live wire (L).

White wire (or blue wire): connect to the neutral wire (N).



Please Scan the QR code to watch the installation video. If you have any questions, please feel free to contact us through the order page.

Installation Steps:

1. Ensure the power is off before starting the installation.
2. Secure the mounting bracket to the junction box using screws.
3. Connect the fixture's wires to the power supply wires:
   - Black wire (or brown wire): connect to the live wire (L).
   - White wire (or blue wire): connect to the neutral wire (N).
   - Secure the connections with wiring caps.
4. Attach the canopy to the mounting bracket and fix it with nuts.
5. Turn on the power. Installation is complete.

Warning!

1.Installation should be performed by a professional.
2.To prevent electric shock, please turn off the power before installing, repairing, or cleaning the light fixture.
3.This light fixture operates within a 110V to 265V range only.
4.Do not install the light fixture in damp conditions.
5.Keep the light fixture away from acidic and corrosive materials.
6. Due to creasing from packaging, the suspension wires of the pendant light require two weeks to gradually straighten after installation.