


CHANDELIER



INSTALLATION MANUAL

TOOLS REQUIRED

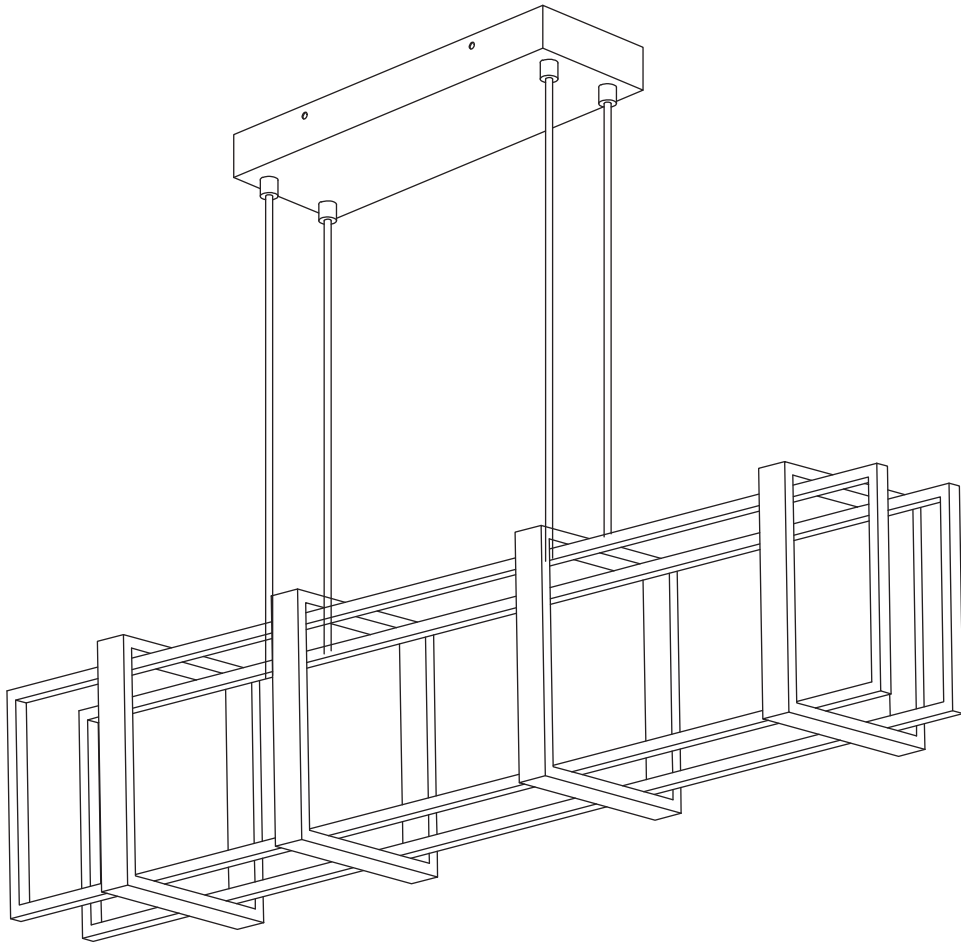


Ladder



Pliers




Wire Strippers



Screwdrivers

01

PACKING LIST

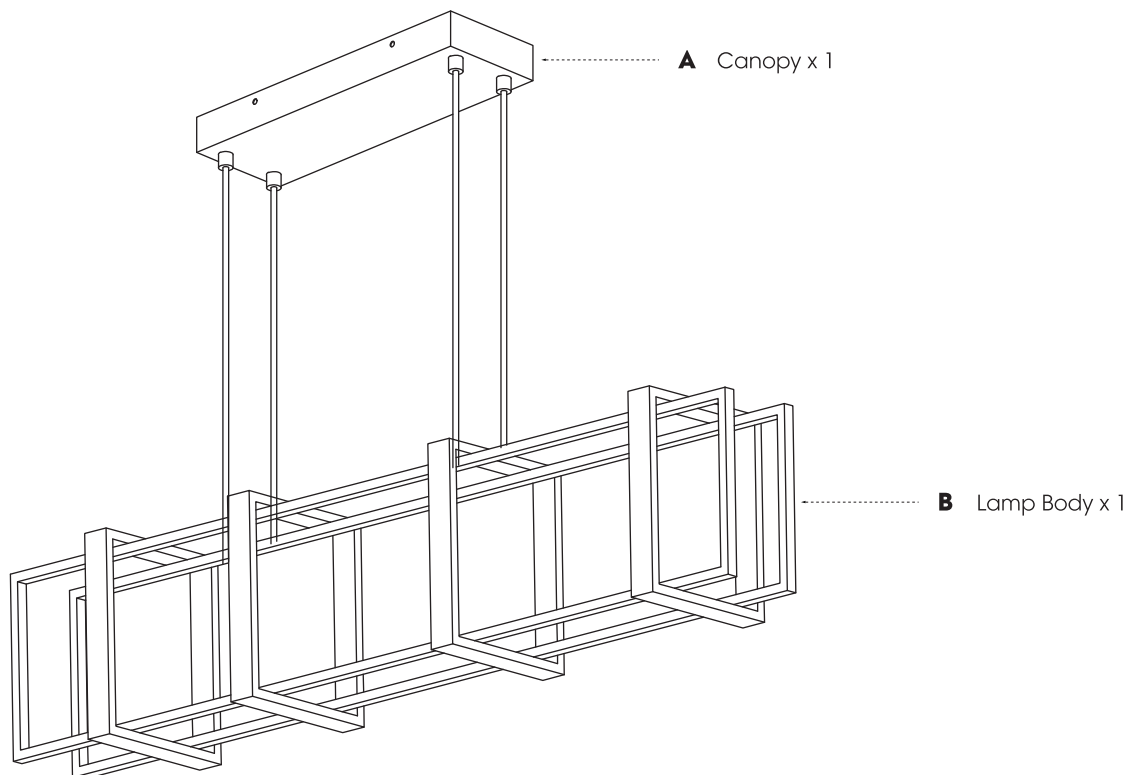


02

INSTALLATION KIT

AA

1×



Mounting Bracket

BB

1×



Ground Screw

CC

3×



Wire Nut

DD

4×



Canopy Screw

EE

2×



Outlet Box Screw

FF

1×



Gloves

NOTE:

1. BB has already been pre-installed with AA, and AA/DD has already been pre-installed with Canopy (A).


03

MOUNTING AND WIRE

1. Install the Mounting Bracket

Step 1. Remove the Canopy Screw (DD), then detach the Mounting Bracket (AA) from the Canopy (A).

Step 2. Secure the Mounting Bracket (AA) to the ceiling using the Outlet Box Screw (EE).

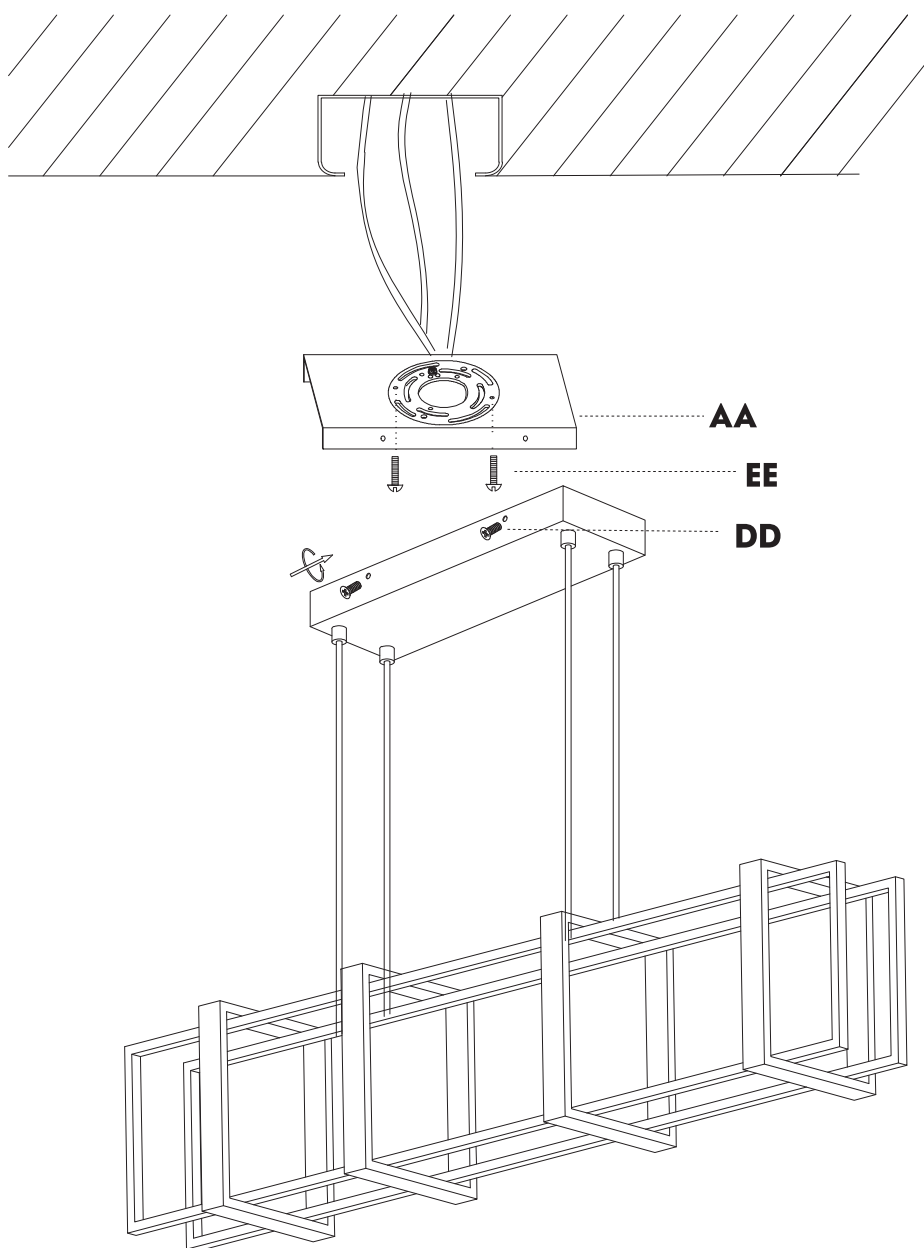


2. Connect the Wires

Step 1. Wrap the ground wire from the outlet box around the Ground Screw (BB) on the Mounting Bracket (AA), and then connect the ground wire from the fixture to the ground wire from the outlet box.

Step 2. Connect the wires from the fixture to the house supply wires, neutral (white) to neutral wire, and hot (black) to hot wire.

Step 3. Spread apart the wires so that the hot wires are on one side of the outlet box and the neutral wires are on the other.

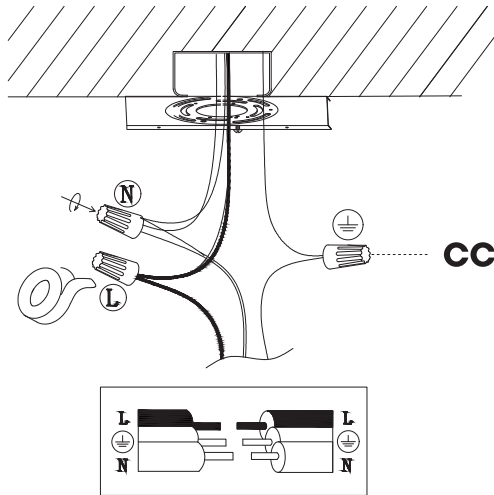

3. Fix the Canopy

Fix the Canopy (A) onto the Mounting Bracket (AA) with the Canopy Screw (DD).

NOTE:

This light uses ON/OFF switch.

Compatible dimming switches (not included).

Use the provided screwdriver to adjust the wire to the required length.

