

Thermoplastic, Lead Free Shallow Well Jet Pumps

WPS05003K	1/2 нр	7.2 дрм
WPS07503K	3/4 нр	9.2 дрм



- Thermoplastic pump housing
- Premium performance at water depths up to 25'
- Totally Enclosed Fan-Cooled (TEFC) motor enclosure protects the inside of the motor from the outside environment
- Heavy-duty, dual-voltage 115/230V
 motor
- Self-priming after pump housing is initially filled
- 30/50 pressure switch
- Preinstalled pressure gauge







Certified Lead Free to: NSF/ANSI/CAN 61 NSF/ANSI 372




Performance (GPM) at 40 PSI Discharge Pressure

Depth to Water					Max	Voltore	Pressure switch				
Model No.	HP	0'	5'	10'	15'	20'	25'	pressure shutoff	Voltage	ON	OFF
WPS05003K	1/2	7.2	6.5	6.0	5.5	5.0	4.5	66 PSI	230/115	30	50
WPS07503K	3/4	9.2	9.0	8.1	7.4	6.8	5.8	67 PSI	230/115	30	50



Application	
	water where the water is located less than 25 feet
Voltage	115/230
Hertz	60
Phase	Single
RPM	3450RPM
Motor type	Permanent Split Capacitor (PSC)
Insulation	Class B
Circuit requirments	20/15 AMP
Duty rating	Continuous*
Shaft seal	Mechanical seal
Motor Shaft	Stainless steel
Upper motor bearing	Ball bearing
Lower motor bearing	Ball bearing
Cooling	Fan cooled
Motor protection	Auto reset thermal overload protector
Pump Specifications	
Discharge size	1" NPT
Suction size	1-1/4" NPT
Pump Housing	Thermoplastic
Pump Base	Thermoplastic
Diffuser	Reinforced thermoplastic
Impeller material	Reinforced thermoplastic
Gasket	Rubber
Solids handling	0" spherical
Liquid temp.range	32-95°F
Operation	Automatic
Fasteners	Steel
Automatic Switch Spe	cifications
Туре	Pressure Switch
Switch on point	30PSI
Switch off point	50PSI

Performance

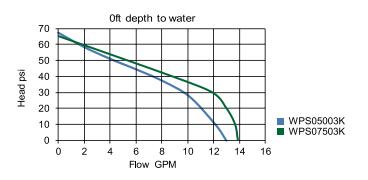

Performance at 40 PSI Discharge Pressure									
Model	ΗP	Amps	Depth to water	0'	5'	10'	15'	20'	25'
WPS05003K	1/2	7/3.5A	GPM	7	6.5	6.0	5.5	5.0	4.5
			GPH	432	390	360	330	300	270
WPS07503K	3/4	8/4A	GPM	9.2	9	8.1	7.4	6.8	5.8
			GPH	552	540	486	444	408	348

Dimensions

