


**CLEAN** 52" Ceiling Fan  
F-003L

WAC  
SMART FANS

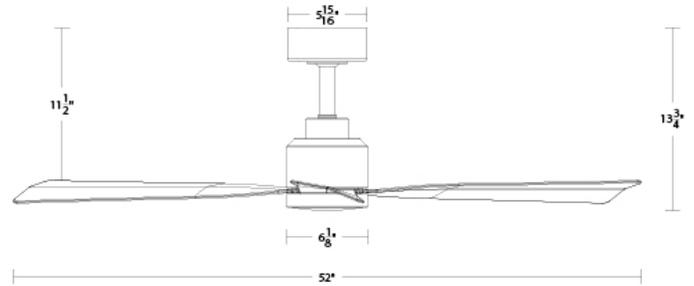

**PRODUCT DESCRIPTION**

A smart fan with minimalist appeal. It perfectly suits a range of design styles without overpowering. Convenient wall and remote control options provide flexibility and ease of use, while a whisper-quiet and energy-efficient DC motor powers the ABS blades.

**SPECIFICATIONS**

**Construction:** Aluminum  
**Blade:** 20° Pitch, 54" sweep, ABS  
**Downrod:** 3/4"W X 6"H included  
**Mounting Slope:** Up to 32°  
**Wire:** 80"  
**Hanging Weight:** 17 lbs  
**Total Power:** 45W  
**Standards:** UL/cUL Wet Location listed, Energy Star Rated, Title 24 Compliant, Title 20 Compliant

**FEATURES**

- 6 fan speeds through both Summer and Winter Modes
- Silent DC motor
- Includes remote control with wall cradle
- Wall control for 3, 4-way control sold separately
- Compatible with WAC app \$9.95 per fan + applicable tax

**LUMINAIRE PERFORMANCE**

**Light Source:** LED  
**Light Wattage:** 13W  
**Dimming:** Integrated  
**Color Temperature:** 3000K  
**Rated Life:** 50,000 Hours

**AIRFLOW/ENERGY EFFICIENCY**

**Weighted-Average Airflow CFM:** 4039/6027 (High)  
**Energy Use (W):** 21/30 (High)  
**Estimated Yearly Energy Cost (\$):** \$5.28  
**Efficiency (CFM/W):** 188/201 (High)

**Motor Type**

DC125NS sensorless DC motor

**ORDER NUMBER**

Model	LED Lumens	Delivered Lumens	Housing	Blade
F-003L	1110	376	<b>BA</b> <i>Brushed Aluminum</i>	<b>TT</b> <i>Titanium Silver</i>
			<b>MB</b> <i>Matte Black</i>	<b>MB</b> <i>Matte Black</i>
			<b>MW</b> <i>Matte White</i>	<b>MW</b> <i>Matte White</i>
			<b>SB</b> <i>Clutch of Ugg</i>	<b>MW</b> <i>Matte White</i>

Example: **F-003L-MB**

The WAC app synchronizes seamlessly with smart home devices you already own



www.WACLighting.com  
 Phone (866) 810.6615  
 Fax (800) 526.2585

Headquarters/Eastern Distribution Center  
 44 Harbor Park Drive  
 Port Washington, NY 11050

Central Distribution Center  
 1600 Distribution Ct  
 Lithia Springs, GA 30122

Western Distribution Center  
 1750 Archibald Avenue  
 Ontario, CA 91760

**CLEAN** 52" Ceiling Fan  
F-003L



**OPTIONAL ACCESSORIES**

<p><b>Bluetooth Wall Control</b></p>  <p><b>WC20</b></p>	<p><b>WT</b> White</p>	<p>Control fan speed and light brightness, and switch between Summer and Winter Modes. Additional Wall Controls can be purchased separately for multiple location control.</p>
<p><b>Bluetooth Remote Control</b></p>  <p><b>RC20</b></p>	<p><b>WT</b> White</p>	<p>Control fan speed and light brightness, and switch between Summer and Winter Modes. Compatible with WAC Smart Fans. Includes easy-to-install wall cradle and batteries.</p>
<p><b>Downrod</b></p>  <p><b>XF-12</b> 12in <b>XF-18</b> 18in <b>XF-24</b> 24in <b>XF-36</b> 36in <b>XF-48</b> 48in <b>XF-60</b> 60in <b>XF-72</b> 72in</p>	<p><b>BA</b> Brushed Aluminum <b>BN</b> Brushed Nickel <b>MB</b> Matte Black <b>MW</b> Matte White</p>	<p>All our downrods are 1" O.D. and are threaded on the motor end to create an extra layer of security and allow for adjustments in the field.</p>
<p><b>Downrod Couplers</b></p>  <p><b>XF-I</b></p>	<p><b>BA</b> Brushed Aluminum <b>BN</b> Brushed Nickel <b>MB</b> Matte Black <b>MW</b> Matte White</p>	<p>Connects two downrods together.</p>
<p><b>Sloped Ceiling Kit</b></p>  <p><b>XF-SCK</b></p>		<p>Designed to accommodate buildings with steeper sloped ceilings up to 45° or 12/12 pitch.</p>

Examples: Wall Control - **WC20-WT**, Remote Control - **RC20-WT**, Downrod - **XF-12-BN**, Downrod Coupler - **XF-I-MB**, Sloped Ceiling Kit - **XF-SCK-MW**

**SUGGESTED DOWNROD HEIGHT USAGE**

Ceiling Height	15'	14'	13'	12'	11'	10'	9'
Downrod	72"	60"	48"	36"	24"	18"	12"

**SLOPED CEILING DEGREE CONVERSION CHART**

Degree	4-8°	9-13°	14-17°	18-21°	22-25°	26-29°	30-32°	33-35°	36-38°	39-41°	42-44°	45°
Ceiling Slope Pitch	1/12 pitch	2/12 pitch	3/12 pitch	4/12 pitch	5/12 pitch	6/12 pitch	7/12 pitch	8/12 pitch	9/12 pitch	10/12 pitch	11/12 pitch	12/12 pitch

Supplied mounting brackets allow mounting on ceiling slopes up to 30° (7/12 pitch). Optional slope kit allows mounting on ceilings up to 45° (12/12 pitch). The receiver will mount inside canopy up to 45°.

**NOTE:** Recommended maximum downrod length of 72" with 80" lead wire

www.WACLighting.com  
Phone (866) 810.6615  
Fax (800) 526.2585

**Headquarters/Eastern Distribution Center**  
44 Harbor Park Drive  
Port Washington, NY 11050

**Central Distribution Center**  
1600 Distribution Ct  
Lithia Springs, GA 30122

**Western Distribution Center**  
1750 Archibald Avenue  
Ontario, CA 91760