Mirror introduction

Full Length Mirror





Short press the switch : on/off Long press the switch :Infinitely adjust the brightness



Short press the switch :switch the light color



Screw*2 Expansion screw*2


InstallationInstruction

Before Installation


- * Please make sure that the installed wall is a load bearing wall.
- * Please check to avoid wires or water pipes when drilling.

Wiring Instructions






Cut out the plug and the reserved wire connection port, which can be hidden on the back of the mirror



Option B

The mirror plug is directly plugged into the wall socket for use (the socket cannot be on the back of the mirror)

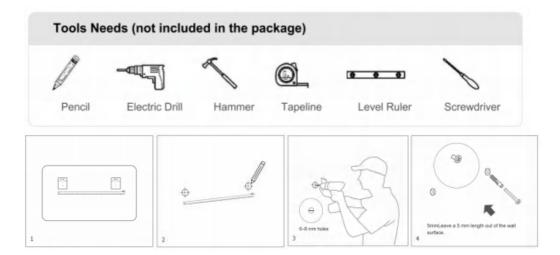

- 1. Measure the hanger spacing Measure the distance between 2hangers with a tape measure
- **2. Mark drilling locations** Determine the specific locations ofdrilling with a tape measure, andmark it out with a pencil.
- **3. Drill holes with a percussion drill** Drill 6-8 mm holes in the wall atmarked locations with a percussiondrill.
- **4. Put an expansion tube into eachhole and put a screw into each tube** Strike expansion tubes into drill holes with a hammer and put screws into expansiontubes with a screwdriver. Leave a 5 mmlength out of the wall surface

More attention:

- Please take care to ensure that all metal parts are kept away from electricity
- 2. For indoor use only.



Fragile Handle with care

Note:

The product is fragile. Be careful during unpacking and installation.

The product works from -45°C to + 35°C. The product should be cleaned by standar detergents and soft cotton cloth.