





USER MANUAL



EN

Overview:

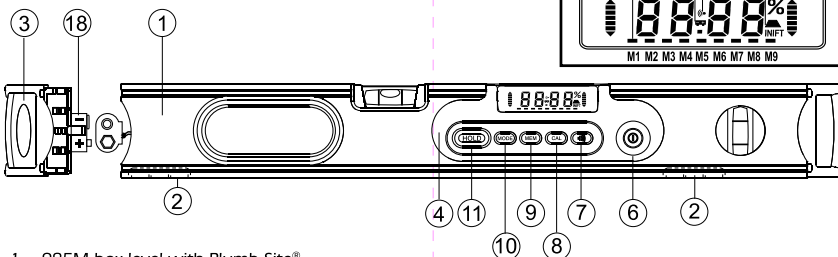

1. 985M box level with Plumb Site®
2. Rare-earth magnets
3. Shock absorbing end caps
4. Digital unit
5. LCD with backlight
6. Power button
7. Buzzer/Mute button
8. Calibration/False zero button
9. Memory/Recall button
10. Mode button – degree, percentage and pitch (in/ft)
11. Hold button
12. Low battery indicator
13. Buzzer/mute indicator
14. Reference angle indicator ("False 0")
15. Memory recall indicators
16. Directional arrows for horizontal and plumb leveling
17. Mode indicators
18. 9V Battery

Power on/off:

- Press the Power button to turn on level. Press again to turn off. If the angle of the unit does not change after 10 minutes, it will turn off automatically.

Hold function:

- Press the Hold button to freeze measurement display. Press again to return to active display.

Mode function:

- Press the Mode button to switch between degree, percentage and pitch (in/ft) readings.

Calibration function:

- Position the Digiman® on a level surface and press the Calibration button for 2 seconds. The LCD will display "CAL1" for 1 second and then the measurement will flash.
- Rotate the level 180°, parallel to the surface, and place on the same surface.
- Press Cal button again for 2 seconds. The LCD will beep and display "CAL2" for 1 second.
- The level is now calibrated and ready for use.
- If the LCD displays 3 dashes (---) after rotating the level 180°, this indicates that it was not kept parallel to level surface during rotation and is not calibrated.

False Zero mode:

- To set a reference angle, press the Calibration button. The display will change to "0.0". The False Zero icon will appear next to the measurement.
- To reset, press Calibration button again.

Buzzer on/off:

- Press the Buzzer button to active the beep tone in the 0°, 45° and 90° angles. Press again to mute.

Direction Arrow:

- There are two Direction Arrows on either side of the LCD display. They indicate which direction to move the Digiman® for a level or plumb measurement.

Technical Specifications:

- Digital leveling: 4 x 90°
- LCD: 360° readout – display flips in upside down position. Wide screen LCD with LED Backlight
- Functions and buttons:
Hold function
Mode function – degree, percentage and pitch (in/ft)
9 measurement memory storage and recall
Recalibration function
Reference angle ("False 0")
Buzzer at 0°, 45°, 90° /mute function
- Electronic measuring precision :
horizontal/vertical: ±0.1° at 0° and 90°
- Electronic measuring precision:
±0.2° from 2° to 89°
- Vial accuracy: ±0.5mm/m (0.0005 "/")
- Working temperature: -10°C to 45°C (14F - 113F)
- Storage temperature: -30°C to 50°C (-22F – 122F)
- Power supply: 9V battery (not included)
- Battery life: Over 8 hours continuous use
- Auto shut-off: After 10 minutes
- Splash/Dust resistance:
According to standard IP54
- Dimensions: 610 x 25 x 60 mm (24" x 1" x 2.4")
- Weight: 650g (23oz/1.43lb)

Thank you for purchasing the 985D Digiman® Professional Digital Level. You are now the owner of one of our innovative state-of-the-art tools. This tool incorporates new MEMS (Micro-Electrical Mechanical Systems) technology to achieve accurate results and reduce work time in horizontal/vertical leveling and angle measurement.


Applications:

- Drywall projects
- Roof layout and framing jobs
- Installing stairs and banisters
- Laying pipe and drainage slopes

Features:

- 985 Magnetic Professional Box Level with Plumb Site® Dual-View™ vial
- MEMS (Micro-Electrical Mechanical Systems) technology
- Wide screen LCD with LED backlight
- 360° readout display – flips in upside down position
- Hold function
- Mode function – degree, percentage and pitch (in/ft)
- Memory storage and recall function – 9 measurements
- Recalibration function
- Reference angle ("False 0") for transferring angle measurements
- Buzzer at 0°, 45°, 90° with mute function
- Digital accuracy: 0.1° at level and plumb, 0.2° at other angles
- Auto-off after 10 min.

Memory and memory recall function:

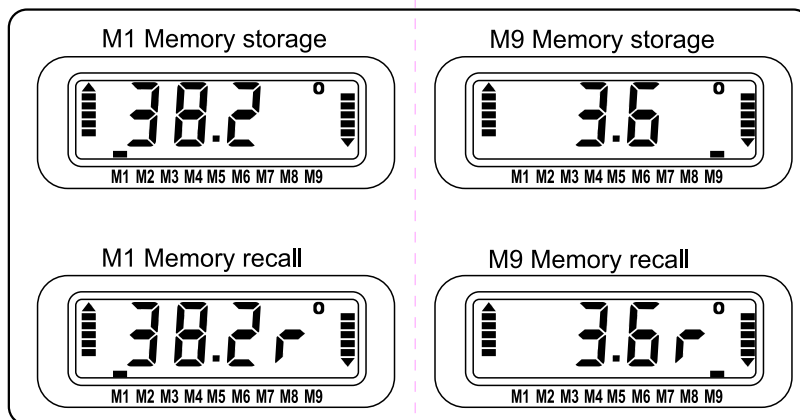

- The Digiman® level can store 9 sequential measurements. To store the displayed measurement, press the Memory button.
- To recall stored measurements, press the Memory button for 2 seconds.


- The stored readings will be recalled in the order they were taken. The order is shown along the lower edge of the LCD in dashes M1 to M9.
- The LCD will show each recalled measurement with the letter "r" next to it.
- To clear stored measurements, turn power off and back on.

Low Battery indication:

- When the battery is less then 7V, the Low Battery signal will be indicated on the LCD.

Battery Change:

- Remove battery holder end cap and detach connectors from 9V battery.
- Replace battery, attach connectors according to battery polarity, and insert end cap into level.

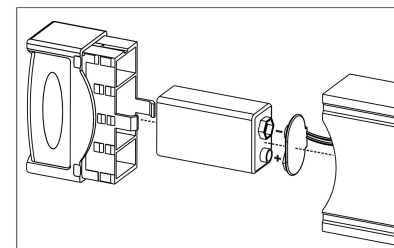

Warranty

This product is covered by a two-year limited warranty against defects in materials and workmanship. It does not cover products that are used improperly, altered, or repaired.

Kapro Industries Ltd.
Kadarim 20117, Israel
Tel: +972.4.6986204
Fax: +972.4.6987228

Kapro Tools Inc.
251 Enterprise Drive
Lake Mills, WI 53551
Tel: 1.888.4 LEVELS

E-mail: quality@kapro.com
Website: www.kapro.com

In the event of a problem with the laser level you have purchased, please return the product to the place of purchase.

Model no. 985D

©2008 Kapro Industries Ltd.