

ASSEMBLY INSTRUCTIONS



CAUTION

◆ Inspect the wire insulation for any cuts, abrasions, or exposed copper that may have resulted during shipping. If there is a defect in the wire, do not attempt installation.

◆ Before starting installation of this fixture or removal of a previous fixture, disconnect the power by turning off the circuit breaker or by removing the fuse at the fuse box.



If you need further assistance, please contact us by Email: customersupport@superiordecorinc.com

TOOLS REQUIRED



Ladder



Safety glasses



Electrical tape




Phillips screwdriver



Flat blade screwdriver




Pliers




Wire strippers


HARDWARE INCLUDED




Fixture




Iron Rack



Stems (A~D)



Canopy



Mounting Unit



Ball Nuts (A&B)




Mounting Screws



Wire Nuts

***PARTS SHOWN MAY DIFFER SLIGHTLY PER LIGHT FIXTURE**


EXPLODED PARTS

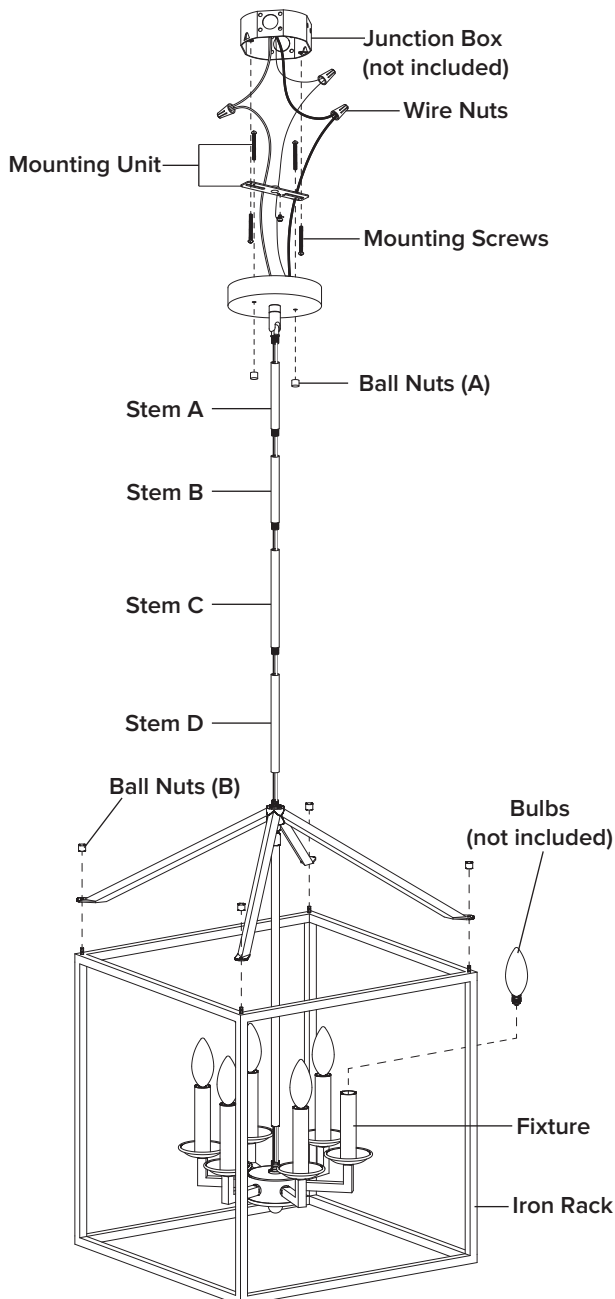

INSTALLATION



STEP 1

Unscrew the **ball nuts (A)** from the **mounting unit**. Use the **mounting screws** to attach the **mounting unit** to the junction box (not included).

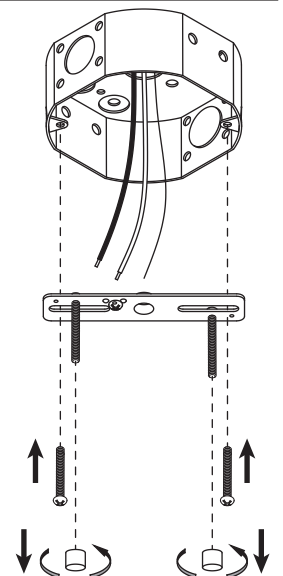

STEP 2


1. Installation **fixture**.
2. Attach the **iron rack** onto **fixture** using **ball nuts (B)**.

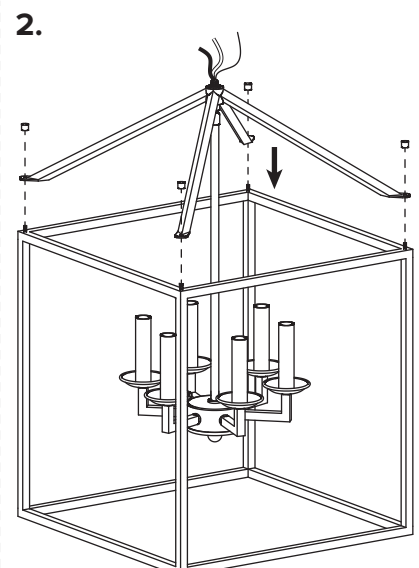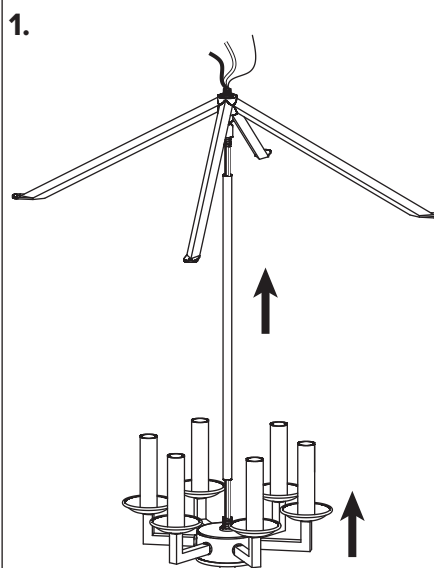

ASSEMBLY INSTRUCTIONS (INSTALLATION)



STEP 3

Install stems based on the desired length of the item, adding **canopy** once finished.

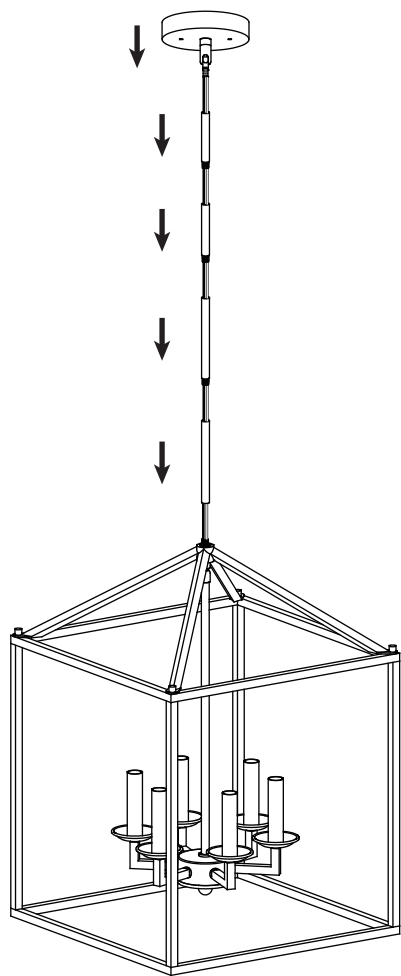


STEP 4

Make the electrical connection from the junction box (not included) to the **fixture**. Connect the ground wire to the **mounting unit** using the preinstalled green ground screw. Next, connect the positive, negative and ground wires with the supplied **wire nuts**. Secure with electrical tape.

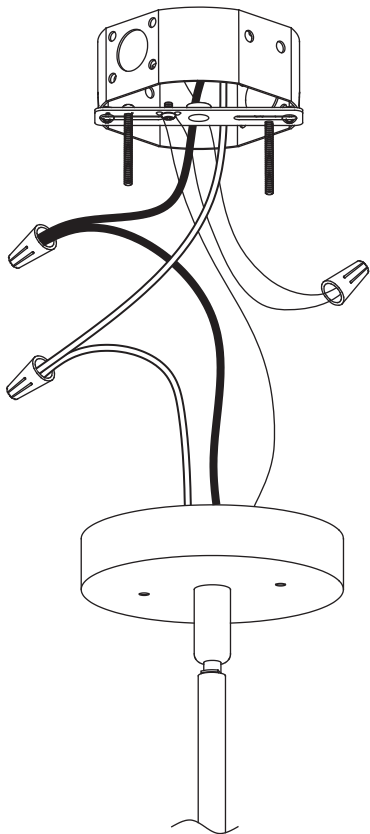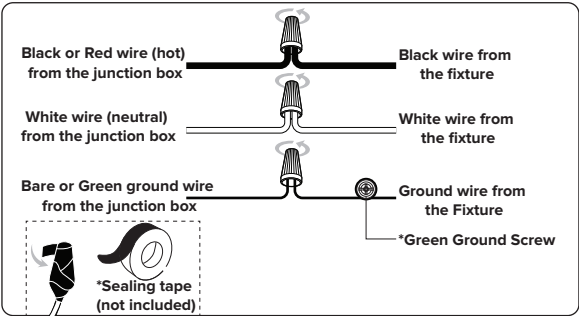

STEP 5

Secure the **canopy** to the **mounting unit** with the **ball nuts (A)**.

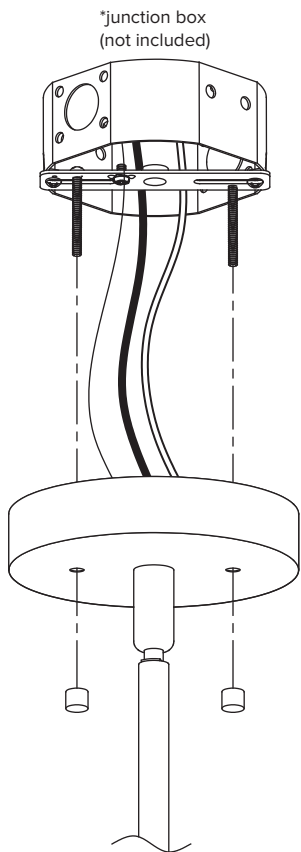

STEP 6

Install bulb (not included)

