
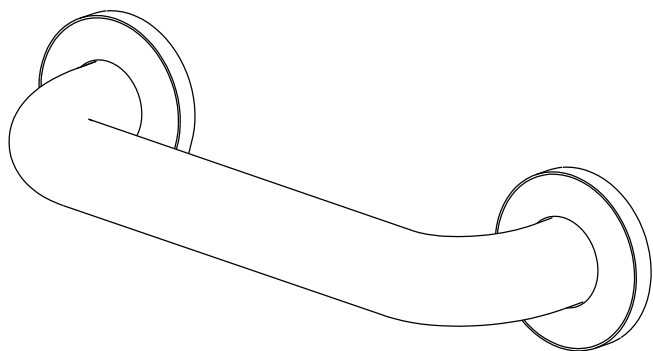


Grab Bar Installation



Parts:

Mounting Screw	MODEL	FINISH
 6 Pcs	CS	Stainless Steel, with Cover
	CT	Stainless Steel, with Cover, Textured
	ES	Stainless Steel, without Cover
	ET	Stainless Steel, without Cover, Textured

www.kingstonbrass.com

TOLL-FREE CUSTOMER SERVICE: 1-877-2-KBRASS

TECHNICAL SUPPORT E-mail: service@kingstonbrass.com

12775 Reservoir Street, Chino, CA91710

TOOLS REQUIRED



Flathead Screwdriver



Phillips Screwdriver



Marking Pencil



Power Drill

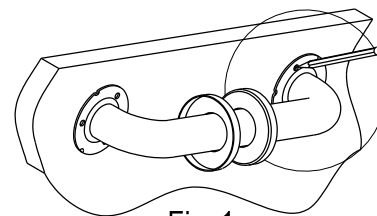


Fig. 1




Fig. 2

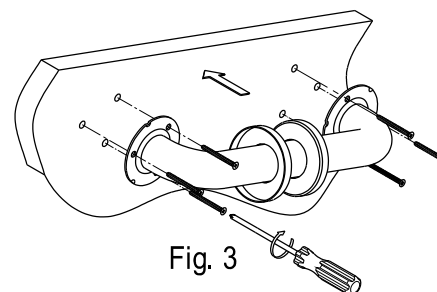


Fig. 3

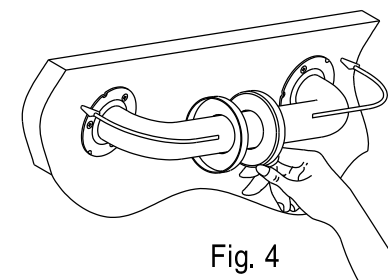


Fig. 4

Cleaning

Clean with a damp cloth only. Avoid using metal or abrasive polishes.

Installation Steps:

1. Locate position on the wall and mark location of the holes.
2. Drill Starter holes (5/64").
3. Mount grab bar to the wall using 2" screws (Enclosed).

This grab bar is designed to be installed on wood bracing, if a proper wood bracing is not available consult your contractor as to the best anchors to use for your specific application some options available are Tile/ masonry anchors, toggle bolts, plastic anchors, metal anchors and drywall anchors.