





 \bigwedge 10

Classified in Accordance With IEC 60900:2018 ASTM F1505 Clasificadas conforme al IEC 60900:2018

ASTM F1505 Classé conformemént au standard IEC 60900:2018 ASTM F1505





PROTECT YOURSELF FROM ELECTRIC SHOCK.™

CRESCENT APEX






STANDS BETWEEN YOU AND 1,000 VOLTS.

Protect yourself from electric shock with Crescent APEX's new patented isolated technology, eSHOK-GUARD, providing insulation of up to 1,000 volts.




Isolated Bit Holder

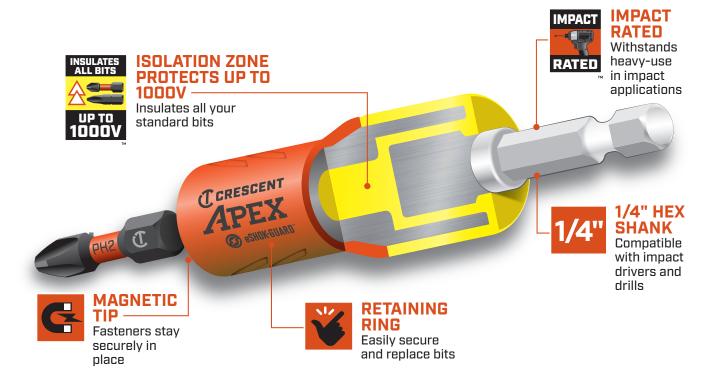

Combining safety and convenience for a revolutionary experience when working around potential live wire applications, eSHOK-GUARD's impact-rated design withstands heavy-use, and impact tool applications, so you never have to sacrifice protection when using power tools.



Socket Isolator

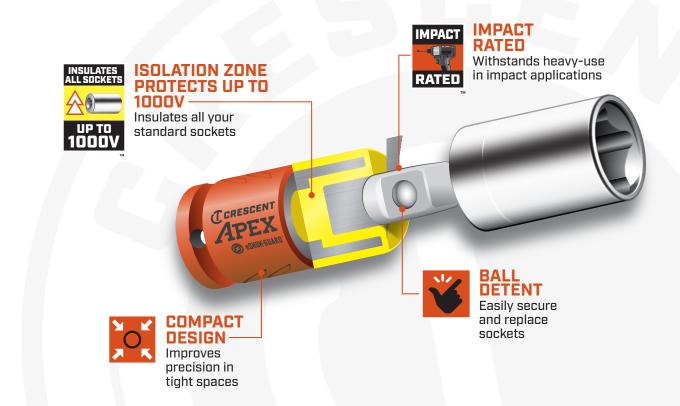



PROFESSIONALS
EXPERIENCE
ELECTRIC SHOCK on
construction job sites.
eSHOK-GUARD is there to
protect you – for life.
US Pat: atgpat.com



ELECTRICITY everyday. **eSHOK-GUARD** is there to **protect** you – for life. US Pat atgratcom

WORK AROUND LIVE

PROFESSIONALS

PROTECT YOURSELF FROM ELECTRIC SHOCK.™

CCRESCENT APEX

eSHOK-GUARD™ Isolated Bit Holder

- Isolation zone insulates all your standard bits, protecting you up to 1000V
- Withstands heavy-use in impact applications
- Magnetic tip keeps fasteners securely in place
- Easily secure and replace bits with a retaining ring
- 1/4" hex shank is compatible with impact drivers and drills

Item No	Description	Size	Overall Length	Rated Voltage
CAEBH2C	Isolated Bit Holder	1/4 in	3 in	1000V
CAEBH2CK-4	Ceiling Fan & Light Installation Kit with Isolated Bit Holder	1/4 in	3 in	1000V







Classified in Accordance With IEC 60900:2018 ASTM F1505

Clasificadas conforme al IEC 60900:2018 ASTM F1505

Classé conformemént au standard IEC 60900:2018 ASTM F1505

eSHOK-GUARD™ Socket Isolators

- Isolation zone insulates all your standard sockets, protecting you up to 1000V
- Withstands heavy-use in impact applications
- Compact design improves precision in tight spaces
- Ball detent for secure fastener retention and easy replacement

Cat. No.	Size	Overall Length	Rated Voltage
CAEAD316	1/4 in	2.125 in	1000V
CAEAD324	3/8 in	2.25 in	1000V
CAEAD332	1/2 in	2.625 in	1000V



CAEAD324



Scan for the eSHOK-GUARD Digital Experience >

