

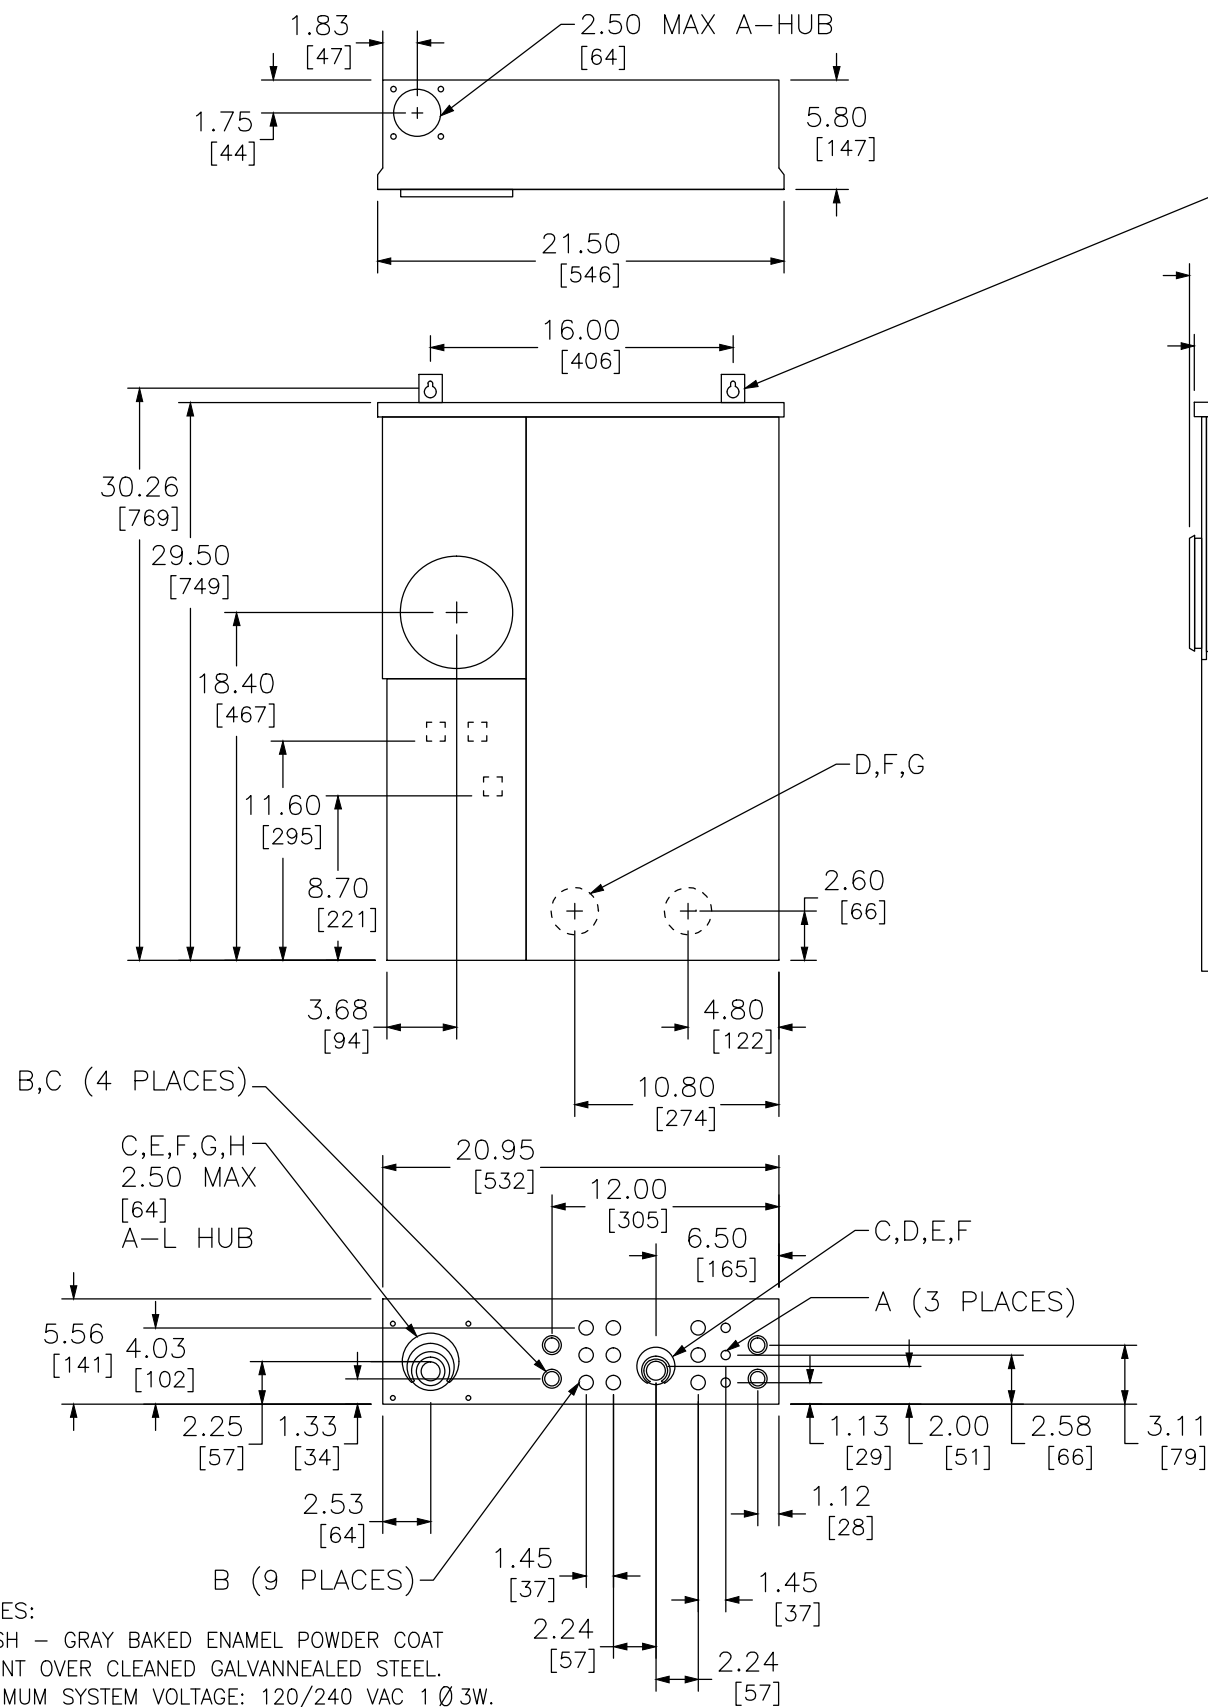


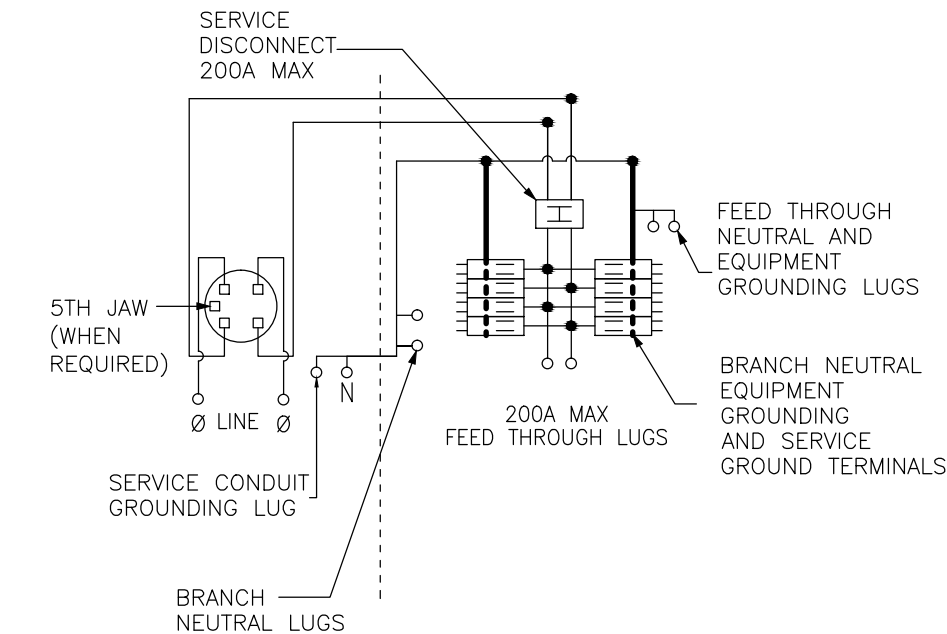

NOTES:
 FINISH – GRAY BAKED ENAMEL POWDER COAT
 PAINT OVER CLEANED GALVANNEALED STEEL.
 MAXIMUM SYSTEM VOLTAGE: 120/240 VAC 1 Ø 3W.
 UL LISTED – FILE E-6294
 SUITABLE ONLY FOR USE AS SERVICE EQUIPMENT.
 SUITABLE FOR UNDERGROUND/OVERHEAD SERVICE.
 MEETS EUSERC SPECIFICATIONS.

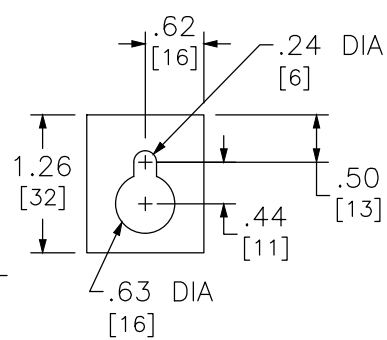

TWO SINGLE POLE, ONE PLUG-ON SPACE TYPE HOMT,
 ONE SINGLE POLE TYPE HOM OR HOMP.
 TWO POLE TYPE HOM, HOMA OR HOMT (15-110A) MAY
 PLUG ON TWO ADJACENTS SPACES.
 TWO POLE TYPE HOMA (150-200A) MAY PLUG ON
 FOUR ADJACENT SPACES.

USE 15-110A AND 150-200A BRANCH BREAKERS ONLY.
 TOTAL CIRCUIT BREAKER HANDLE RATING NOT TO EXCEED
 170A PER BRANCH CIRCUIT CONNECTOR.

A SQUARE D UL LISTED SECONDARY SURGE ARRESTER MAY
 PLUG ON TWO ADJACENT SPACES. ORDER CATALOG NO.
 HOM2175SB

SC816F150PS
 SC816F200PS

DUAL DIMENSIONS: INCHES
 MILLIMETERS

AMPERE RATING	FACTORY INSTALLED BYPASS TYPE	SHORT CIRCUIT CURRENT RATING	CATALOG NUMBER	SERIES	SPACES	MAXIMUM NUMBER OF SINGLE POLE HOM CIRCUITS	LINE SIDE PHASE & NEUTRAL LUGS (AWG/KCMIL)	FEED THROUGH LUGS PHASE & NEUTRAL (AWG/KCMIL)	LARGE BRANCH NEUTRAL AWG
150	NONE	22K	SC816F150PS	M01	8	16	#4-250 CU/AL	#6-250 CU/AL	#14-2/0 CU/AL
200			SC816F200PS						

COMBINATION SERVICE ENTRANCE DEVICES
 RING TYPE
 RAINPROOF NEMA TYPE 3R ENCLOSURE
 SURFACE ONLY



DWG#
 NO.