

DWACPRIR IMPACT CONNECT™ COPPER PIPE CUTTER ATTACHMENT




Transform your impact driver[†] into a fast and powerful copper pipe cutter with the innovative DEWALT IMPACT CONNECT™ Copper Pipe Cutter Attachment[‡]. Cut up to 4X faster*** and avoid the hassle of hand tools with attachments that leverage the power of your existing impact driver. The revolutionary Quick-Change brace system attaches in seconds and allows you to seamlessly switch between cutting pipe and driving screws without additional interruptions. Send your productivity into overdrive with IMPACT CONNECT™ products that are designed to work with select DEWALT 20V MAX* and other pro-grade 18V Impact Drivers[†].

25618, IDH182, GDX18V-1800C FLEX® - 1351, FX1371A KOBALT® - K18ID-16A MAKITA® - LXDT01, LXDT08, XDT11, XDT13, XDT14, XDT15, XDT16, XDT18 METABO® - WH18DBDL2, WH18DDX MILWAUKEE® - 2653-20, 2656-20, ed trademarks of Stanley Black & Decker, Inc. BOSCH, FLEX, KOBALT, MAKITA, METABO, and MILWAUKEE are registered trademarks of Robert Bosch GmbH, Flex-Elektrowerkzeuge GmbH, LF, LLC, Makita Corp., Metabowerke GmbH endorsed or annowed this product or its statement of conneatibility.

In DEWALT® Impact Connect Copper Tubing Cutter Attachment in DEWALT® Impact Driver DCF887 with fully charged battery vs. LENOX® 148330TSK 3 PC Tubing Cutter Kit, cutting ½ in. and 3/4 in. Type L Copper pipe, cut time only

IMPACT CONNECT™ COPPER PIPE CUTTER ATTACHMENT

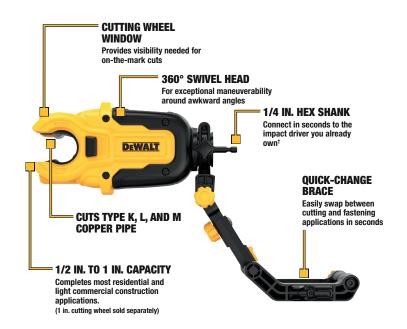

Cut up to 4X faster*** and avoid the hassle of hand tools.



HOW TO ATTACH TO IMPACT DRIVER



Hemove battery from Impact Driver. Loosen back knob and spread wide enough to fit over the base of the Impact Driver.



On a flat surface, slide the Impact Driver into the brace bracket. Tighten the back knob until the brace bracket is



Loosen both knobs on the brace arm.



attachment shank into the Impact Driver chuck.



arm onto the bar of the brace bracket. Ensure the arm locks securely onto the bar.

Attach the brace



Ensure the attachment shank is parallel to the ground and tighten both brace arm knobs securely.

INCLUDES

DWACPRIR

(1) DWACPRIR Copper Pipe Cutter Attachment

(1) Brace Bracket, (1) 1/2 in. Cutting Wheel, (1) 3/4 in. Cutting Wheel

OPTIMIZED FOR

DEWALT® DCF787, DCF809, DCF850, DCF885, DCF887, DCF888

COMPATIBLE WITH

CRAFTSMAN® CMCF810, CMCF820

BOSCH® 25618, IDH182, GDX18V-1800C

FLEX® 1351, FX1371A

KOBALT® K18ID-16A

MAKITA® LXDT01, LXDT08, XDT11, XDT13, XDT14, XDT15, XDT16, XDT18

METABO® WH18DBDL2, WH18DDX

MILWAUKEE® 2653-20, 2656-20, 2760-20, 2850-20, 2853-20

RELATED ITEMS

DWACPR10

1 in. Additional Cutting Wheel



DWACPR34

3/4 in. Replacement Cutting Wheel



DWACPR12

1/2 in. Replacement Cutting Wheel



DWAPVCIR

IMPACT CONNECT™
PVC/PEX Pipe
Cutter Attachment



Copyright ©2022 DEWALT. The following are trademarks for one or more DEWALT power tools, accessories, anchors and concrete adhesives: The yellow and black color scheme; the "D"-shaped air intake grill; the array of pyramids on the handgrip; the kit box configuration; and the array of lozenge-shaped humps on the surface of the tool

DWACPRIRSS