



5022 Joanne Kearney Blvd.
Tampa, FL 33619

Phone: 813.349.1900
Fax: 813.349.1907

Version: A
Release Date:
2016-21-09

MAINTENANCE AND CARE:

Disconnect the product from the power supply before cleaning or maintenance.


Installation Instructions for Parry 3 Surface Spot & Wash linear

SAFETY INFORMATION


1. This luminaire must be installed in accordance with National Electrical Code and local electrical and construction regulations. To assure full compliance with local codes and regulations, check with your local electrical inspector before installation.
2. To prevent electrical shock, turn off electricity at fuse box before installation.
3. Do not exceed product specified luminaire voltage. Any other source will void warranty.
4. Do not install if luminaire, parts or connectors are damaged.
5. Product must be installed with provided drivers and housings only. Use of other manufacturers' components will void warranty.

Warning:

This product contains chemicals known to the state of California to cause cancer, birth defects, and/or other reproductive harm. Thoroughly wash hands after installing, handling, cleaning, or otherwise touching this product.



- 1.- Connect 120VAC(White & Black) leads from Junction box to (White & Black) leads of LED Driver.
- 2.- Connect 120VAC ground wire from J-Box to bracket ground wire.
- 3.- Place LED Driver into junction box
- 4.- Align slots of round mounting plate up with 2 threaded mount point of junction box and add screws to secure round plate to J-Box.
- 5.- Connect the LED Driver.
- 6.- Add canopy and secure with screws on surface of canopy.

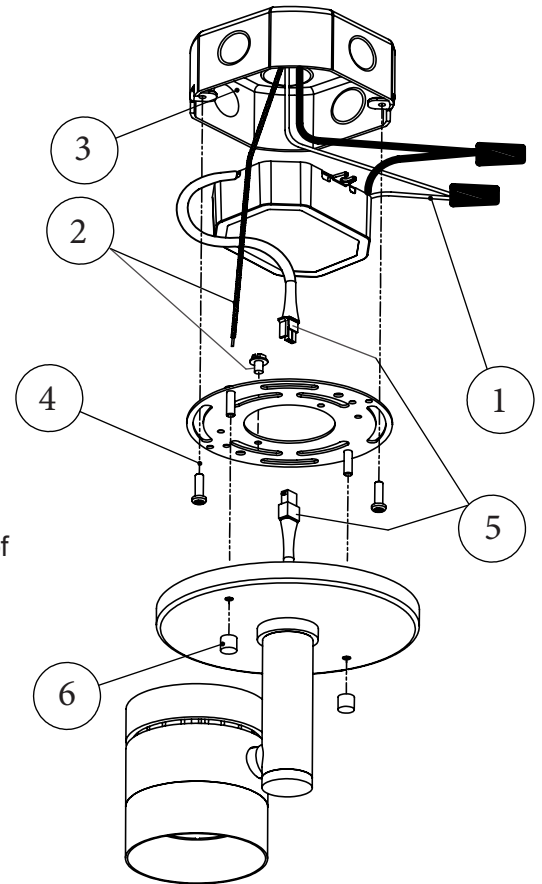

120V
60Hz

POWER
20W



712060U /61U

712070U /71U

LED, 1600 Lm
3000K, CRI 90

Ø 2.75in x 5.5in

1.2 lbs