

## Drake® Two-Piece Toilet, 1.6 GPF, 10" Rough-In

### FEATURES

- TORNADO FLUSH® system, (1.6 GPF/6.0 LPF)
- CEFIONTECT® ceramic glaze minimizes waste from sticking to porous ceramic surfaces.
- Elongated front bowl, seat sold separately
- Universal Height
- Chrome plated trip lever
- 10" Rough-in, supply line sold separately

### MODELS

- **CST776CSFG.10 (#01, #03, #11, #12)**  
With CEFIONTECT ceramic glaze without seat
- **CST776CSF.10 (#51)**  
Same as CST776CSFG without CEFIONTECT ceramic glaze

### COMPONENTS

- **C776CEFG.10**  
Elongated bowl with CEFIONTECT
- **ST776SA**  
Tank and cover only

### OPTIONAL COMPONENTS

- **THU808(#01, #03, #11, #12, #51, #PN, #BN, #RB)-A**  
Trip Lever - Cotton, Bone, Colonial White, Sedona Beige, Ebony, Polished Nickel, Brushed Nickel, Oil Rubbed Bronze)

### COLORS/FINISHES

- #01 Cotton



-  **TORNADO FLUSH**  **UNIVERSAL HEIGHT**
-  **CEFIONTECT**

### PRODUCT SPECIFICATION

The two-piece TORNADO FLUSH system toilet shall be 1.6 GPF/6.0 LPF. Toilet shall be 10" rough-in. Toilet shall have CEFIONTECT ceramic glaze and be at Universal Height. Toilet shall have elongated front bowl with Polished Chrome trip lever. Toilet shall be TOTO Model CST776CSFG.10#01.

### CODES/STANDARDS

- Meets and exceeds ASME A112.19.2/CSA B45.1
- Certifications: IAPMO(cUPC®)
- Code Compliance: UPC, IPC, NSPC, NPC Canada, and others
- ADA compliant (when installed with trip lever located on the approach side)



# CST776CSFG.10

## Drake® Two-Piece Toilet, 1.6 GPF, 10" Rough-In


### SPECIFICATIONS

<b>Water Use</b>	1.6 GPF (6.0 LPF)
<b>Flush System</b>	TORNADO FLUSH®
<b>Min. Water Pressure</b>	8 psi (Flowing)
<b>Water Surface</b>	9" x 6-7/8"
<b>Trap Diameter</b>	2-1/8"
<b>Rough-in</b>	10"
<b>Trap Seal</b>	2-1/8"
<b>Warranty</b>	One Year Limited Warranty
<b>Material</b>	Vitreous China
<b>Shipping Weight</b>	C776CEFG.10 62 lbs. ST776SA 32 lbs.
<b>Shipping Dimensions</b>	C776CEFG.10 30-1/8" L x 15-1/4" W1 x 10-7/8" W2 x 17-3/4" H ST776SA 18-3/4" L x 8-7/8" W x 16-1/4" H

### INSTALLATION NOTES


#### Back-to-Back Toilet Installations:

TOTO recommends the use of a nationally listed, double sanitary tee-wye only, in vertical waste stacks, in accordance with the stipulations noted in the majority of nationally recognized plumbing codes.

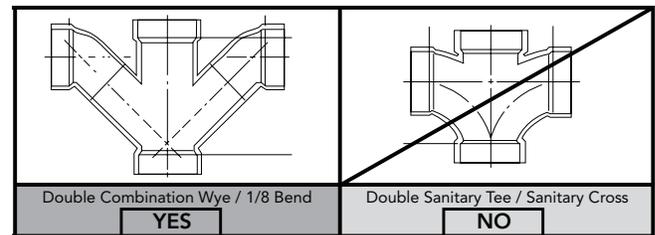

To maintain adequate wall gap between the back of the tank and wall, mount the floor flange at a nominal 10" rough-in distance.

### DIMENSIONS

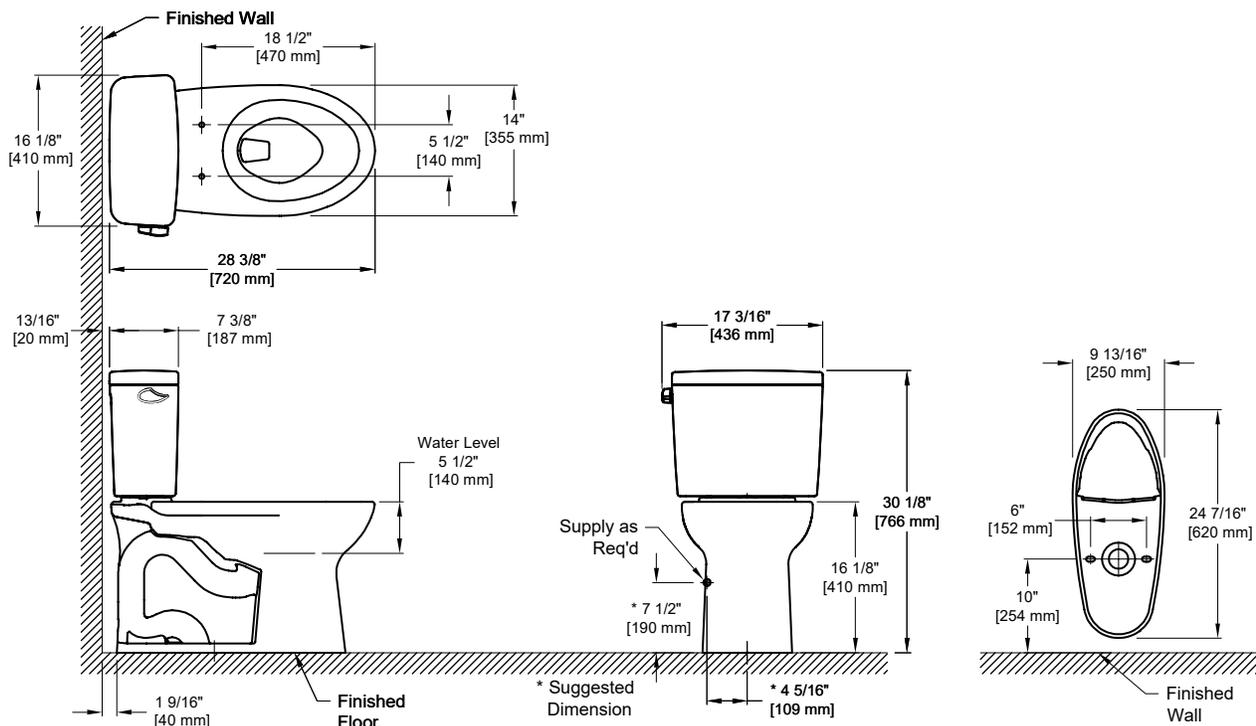

**TOTO®**

*These dimensions and specifications are subject to change without notice*