
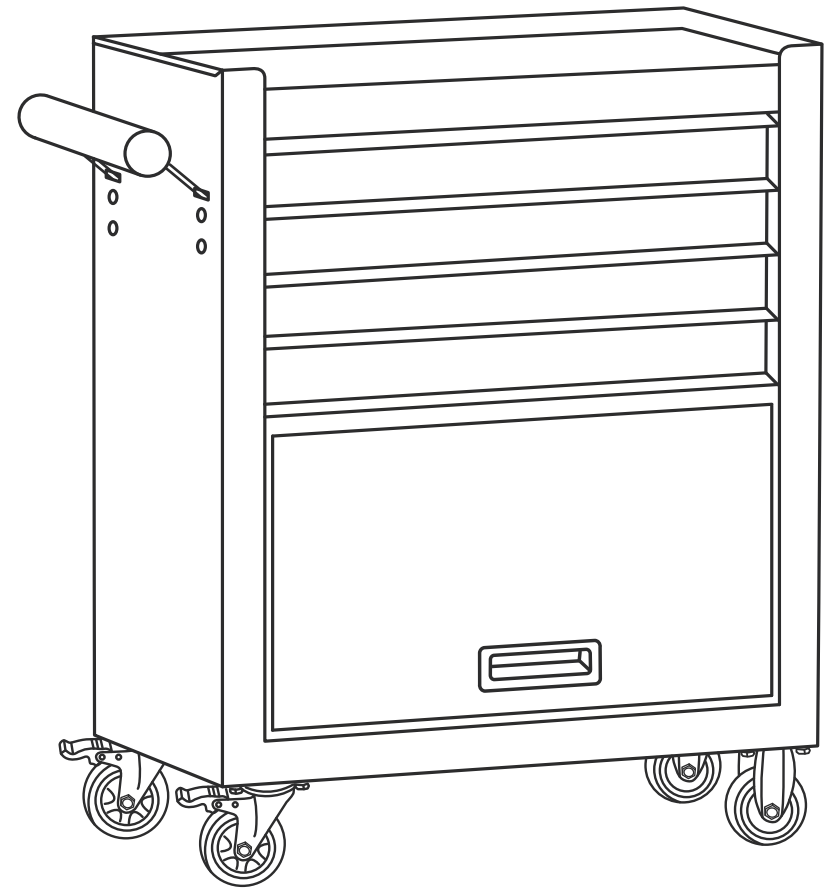


MAXIMUM LOADS

4 DRAWERS CHEST & CABINET

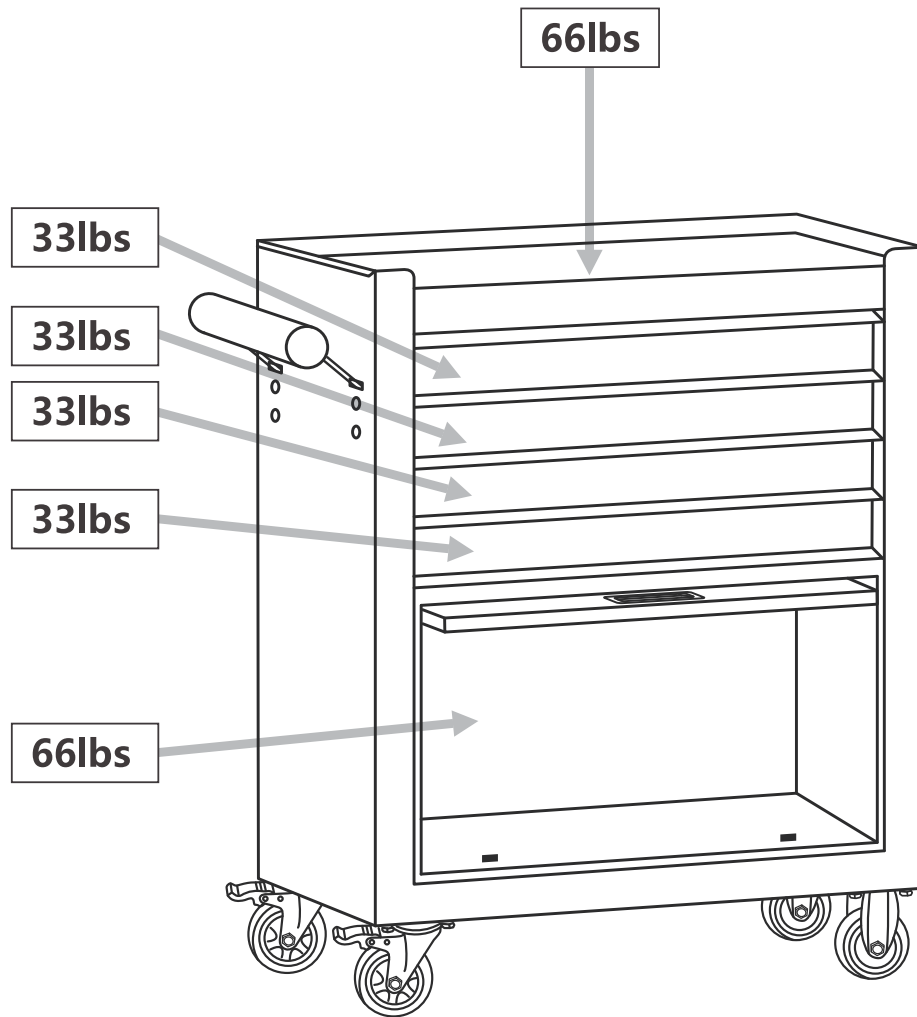







The maximum loading capacity is **264lbs**

CARE AND MAINTENANCE:


- Clean the item with a damp cloth and a mild detergent.
- Never use solvent, alkaline or acidic cleaning products as this can damage the surfaces of your tool box.

⚠ IMPORTANT SAFETY INFORMATION

- Do not step on the item, you could get hurt.
- The item must not be remoulded. Any modifications made could compromise its safe use, resulting in potential physical or material damage.
- This item has been manufactured exclusively for private use and is only suitable for indoor use.
- Before assembly, please check that all parts listed are present.
- If any parts are damaged or missing, please do not assemble the item, incorrect or incomplete assembly may result in injury.
- Install the item on a flat, horizontal surface and make sure you have enough space for assembly.
- Follow exactly each step in the order of assembly instructions.
- When assembling parts, be careful not to cut or pinch yourself.
- We recommend wearing gloves during assembly.
- Do not deform parts by forcing during assembly.
- When placing the hooks on the perforated wall, make sure they are properly engaged to prevent them from falling.
- The stability of this item is primarily ensured by the proper distribution of the loads placed inside and in the drawers. To avoid any risk of tipping, here are some rules to respect:
 - Place the heaviest loads in the lower compartment;
 - Do not place any load in the upper drawers if there is no load in the lower compartment;
 - Do not overload drawers, especially top drawers
(Refer to the diagram on page 6 for maximum loads)
- To avoid any risk of tipping:
 - Open only ONE drawer at a time;
 - Carefully open the desired drawer;
 - Place the loads in the lower compartment firstly.



Parts	No.	QTY.	Parts	No.	QTY.
	A	1		D	1
	B	2		E	16
	C	2		F	4

Assembly of Casters

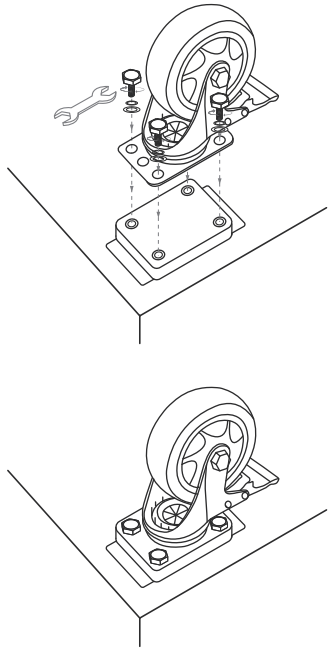


Install 4pcs 4-inch wheels from the bottom. Place spacers, spring washers and screws into each hole. Tighten the screws and fix. Note: The wheels are divided into universal wheels and fixed wheels. 2 PCS universal wheels will be under one side of the handle. Install 4pcs 4-inch wheels from the bottom. Place spacers, spring washers and screws into each hole. Tighten the screws and fix. Note: The wheels are divided into universal wheels and fixed wheels. 2 PCS universal wheels will be under one side of the handle.



Two Casters With Brakes



Two Casters With Brakes

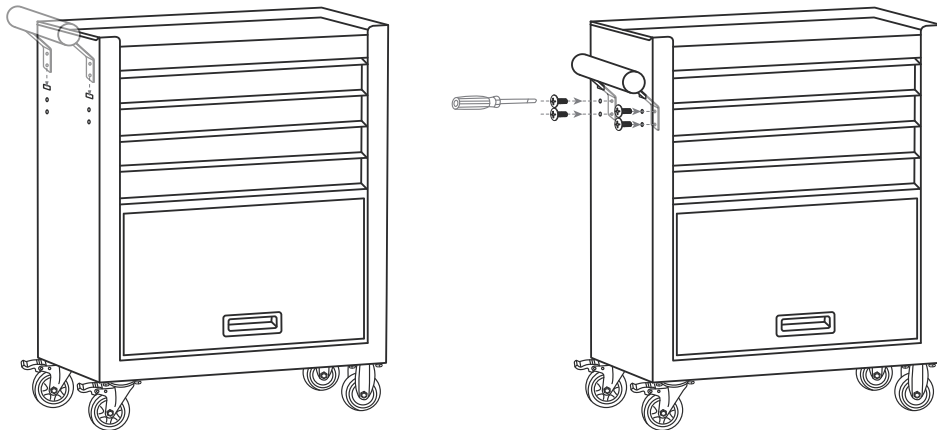

Locking System

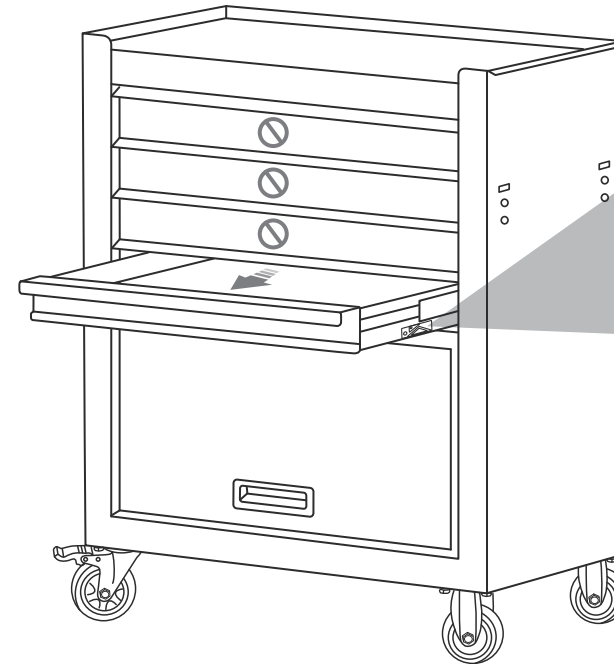


Anti-tilt Design

Only one drawer can be opened at a time to prevent tipping

Sliding Drawers

The ball slides have black retaining clips. To remove a drawer, simultaneously release these clips by pushing up the right slide and down the left slide. Pull the drawer completely and take it out. To reinstall the drawer, replace it on its slides and push it completely.

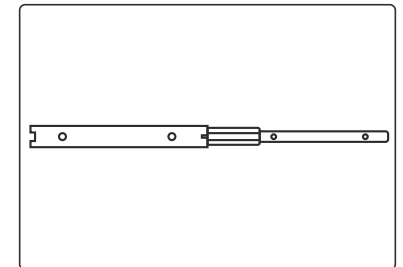

⚠ NOTES:

- Lubricate the top and bottom channels of the drawer slides at least twice a year.
- Do not open more than one loaded drawer at a time.
- The maximum loading capacity is 264lbs.