

GLASS DOOR ICE MERCHANDISER FREEZERS

MODEL: ☐ MXM1-23FHC-ICE ☐ MXM2-48FHC-ICE



MXM1-23FHC-ICE



MXM2-48FHC-ICE

Maxx Cold Glass Door Ice Merchandisers are engineered to store and hold up to (54) 8-lb bags of ice at one time for a single door unit and up to (117) 8-lb bags of ice for a double door unit. The full length, triple pane glass doors prevent condensation as well as display and regulate the merchandise at the right temperature. Interior and exterior is constructed of white powder coated steel and is supplied with an illuminated plastic merchandising top panel. The self-closing doors are provided with a lock and key set. Electronic thermostat and digital LED temperature display provides accurate and easy reading; temperatures range from 0° to 10° Fahrenheit to ensure ice stays frozen and does not stick together. The automatic defrost system ensures the indoor ice merchandiser operates properly.

FEATURES AND CONSTRUCTION

- Constructed of a white powder coated steel exterior and interior
- Low-e triple pane glass doors
- Bottom mounted compressor
- One (1) heavy-duty PE-coated floor support with customer facing bag retainer per section
- Four (4) rollers (2 with leveling feet)
- Electronic thermostat and digital LED temperature display provides accurate and easy reading
- Self-closing doors are provided with lock and key set for security
- Magnetic gasket can be replaced without tools
- CFC free refrigerant and foam
- Automatic defrost system, equipped with integrated condensate pan therefore no drain line connection is needed
- Designed with an illuminated plastic merchandising top panel

NOMINAL STORAGE CAPACITY

MXM1-23FHC-ICE..... 23 Cu Ft (651 L)

MXM2-48FHC-ICE..... 48 Cu Ft (1359 L)

TEMPERATURE


Holding temperature 0°F to 10°F (-18°C to -12°C)

- Oversized refrigeration system delivers optimum storage temperature and rapid temperature recovery



ELECTRIC

115V / 60Hz / 1Ph
6' (2m) power cord set included



NEMA 5-15P

3RD PARTY APPROVALS



Intertek

Certified to ANSI NSF 7



Intertek

Certified to ANSI UL 471




Zero Ozone Depletion Potential


MAXX COLD WARRANTY (USA / CANADA)

Contact Maxx Cold for warranty statement at
TechnicalServices@TheLegacyCompanies.com or 877.368.2797


MXM1-23FHC-ICE

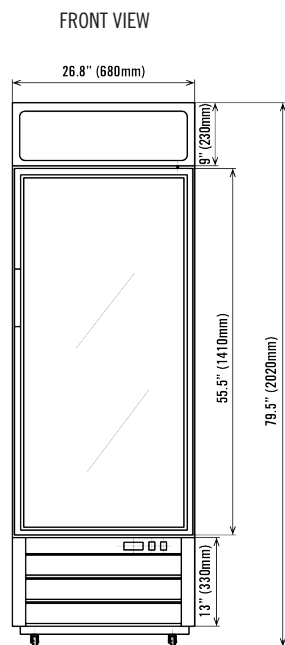




SIDE VIEW

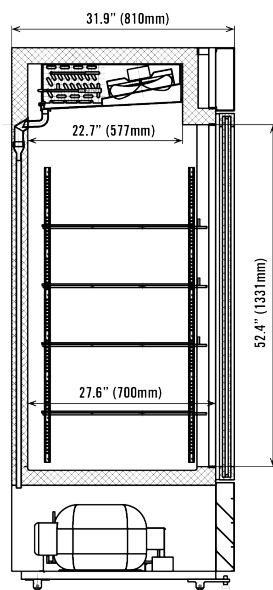

TOP VIEW



MXM2-48FHC-ICE

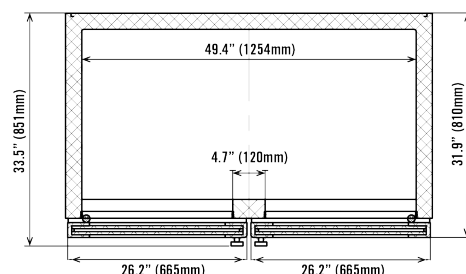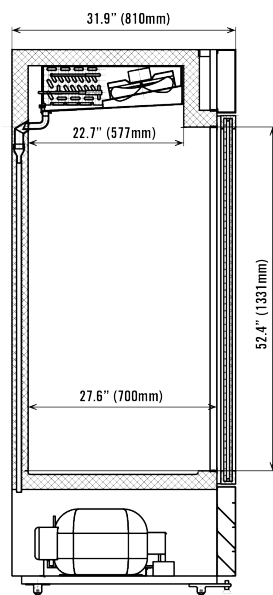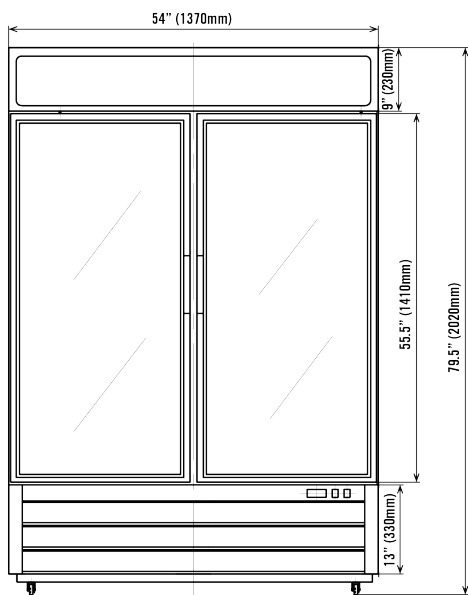

MODEL	EXTERNAL DIMENSIONS	INTERNAL DIMENSIONS	NOMINAL CAPACITY	HOLDING TEMPERATURE RANGE	AMP DRAW	SHIPPING WEIGHT	REFRIGERANT AND CHARGE SIZE	DOORS	ELECTRICAL
MXM1-23FHC-ICE	27" x 33.5" x 79.5" (686 x 851 x 2019 mm)	22.2" x 27.6" x 52.4" (564 x 701 x 1331 mm)	23 Cu Ft (651 L)	0°F to 10°F (-18°C to -12°C)	8.0A	353 lbs (161 kg)	R-290A 3.88 oz (110 g)	1 Swing	115V / 60Hz / 1Ph
MXM2-48FHC-ICE	54" x 33.5" x 79.5" (1372 x 851 x 2019 mm)	49.4" x 27.6" x 52.4" (1255 x 701 x 1331 mm)	48 Cu Ft (1359 L)	0°F to 10°F (-18°C to -12°C)	9.0A	567 lbs (258 kg)	R-290A 5.29 oz (150 g)	2 Swing	115V / 60Hz / 1Ph

INSTALLATION

- Units are equipped with roller wheels and leveling feet.
- Door Handles are removable if unit is needed to fit through a 32" width door frame.