



# SPARKLING DISHES, ULTRA-QUIET PERFORMANCE

## Dishwasher with Extended Dry and Sanitize Cycle

MDT24H3AST      Stainless

Superior cleaning technology combined with an Extended Dry feature ensure dishes come out spotless and completely dry. A hygienic Sanitize Cycle removes bacteria.

Whisper-quiet 45 dBA performance keeps your home quiet while a convenient third rack is perfect for knives and large utensils. Elegant, convenient LED interior lighting lets you see inside more easily.

### Sanitize Cycle

A high temperature rinse cycle reduces 99.99% of bacteria from dishes and is NSF Certified. A control panel light lets you know sanitization temperature was reached and the cycle is complete.

### Extended Dry

Dual fan heating system extends drying time to make sure dishes are extra dry.

### Sleek LED Cycle Indicator

Tells you the wash cycle progress (Wash, Rinse, Dry, Complete) and blends in when the machine is off.

### Convenient Third Rack

Perfect for flatware, knives and serving utensils and for easy, safe loading and unloading of sharp objects.

### LED Lighting

Convenient, LED illumination lets you clearly see the inside making loading and unloading easier.

### Stainless Steel Tub

Durable stainless steel tub has a premium look and is built to last.

### Flip Tines

6 flip tines in the lower rack and 2 in the upper rack provide flexible loading options to meet your varying needs.

# Dishwasher with Extended Dry

Model MDT24H3AST



## SPECIFICATIONS


UPC		817986026784
Color		Stainless Steel
PERFORMANCE		
ENERGY STAR®		Yes
Energy Level (kW/yr)		260 - 270
Certification, Safety		UL, NSF
Sound Level (dBA)		45
HYDRAULIC SYSTEM		
Disposer		Yes
Filter System		Blue Triple Filters
Main/Drain Pump		AC
Heating System		Visible
Water Metering		Flow Meter
Drying System		Extended Dry (2 Fan Assisted)
Tub Top Spray System		Rotary
3-Level Spray Wash (Top)		Yes, Single Plastic Rack
Middle Spray System		Rotary
Lower Spray System		Rotary
FEATURES		
Capacity (Place Settings)		14
No. of Cycles		6 (Heavy, Auto, Normal, Delicate, Quick, Rinse)
No. of Options		5 (Sanitize, Hi Temp, Heated Dry, Extended Dry, Delay Wash 2-4-8 Hour)
Control Lock		Yes
Cancel & Drain or Reset Button		Yes
Start & Pause Button		Yes
Digital Leak Sensor		Yes
Overflow Sensor		Yes
Water Fill Sensor (Flow Meter)		Yes
Turbidity Sensor		Yes
Audible End of Cycle Signal		On/Off
Triple Filter		Yes
Last Cycle Memory		Default to Auto Cycle with Heated Dry
Interior Lighting		Yes - 2 LED Lights
3rd Rack		Yes
Silverware Basket		3 pcs, Flexible
Upper Rack		
Height Adjustable		Yes - Quick Adjust with Touch Levers
Cup Shelves		Yes - 2 with Stemware Support
Flip Tines		2
Flip Tine Bracket Color		Midea Blue
Ball End Tines		Yes
Rack Color		Silver Metallic
Rack Handle		Plastic with Metal Logo
Lower Rack		
Flip Tines		6
Flip Tine Bracket Color		Midea Blue
Ball End Tines		Yes
Rack Color		Silver Metallic
Rack Handle		Plastic with Metal Logo
ELECTRICAL		
Power Supply		120V/60hz
Input Power (W)		600
PHYSICAL ATTRIBUTES		
Fascia Style		Top with Bar Handle
Button Style		Backlit Touch Control
Display/Cycle Indicator		4-Stage Cycle Progress Indicator on Door
Tub Material		Stainless Steel
Inner Door Material		Stainless Steel
Finish		Anti-Fingerprint Stainless Steel
Dimensions (W*D*H)	in	23.9 x 24.5 x 33.8
	cm	60.6 x 62.3 x 85.7
Net Weight	lbs	96.56
	kg	43.8

# Dishwasher with Extended Dry

Model MDT24H3AST



## UNIT DIMENSIONS

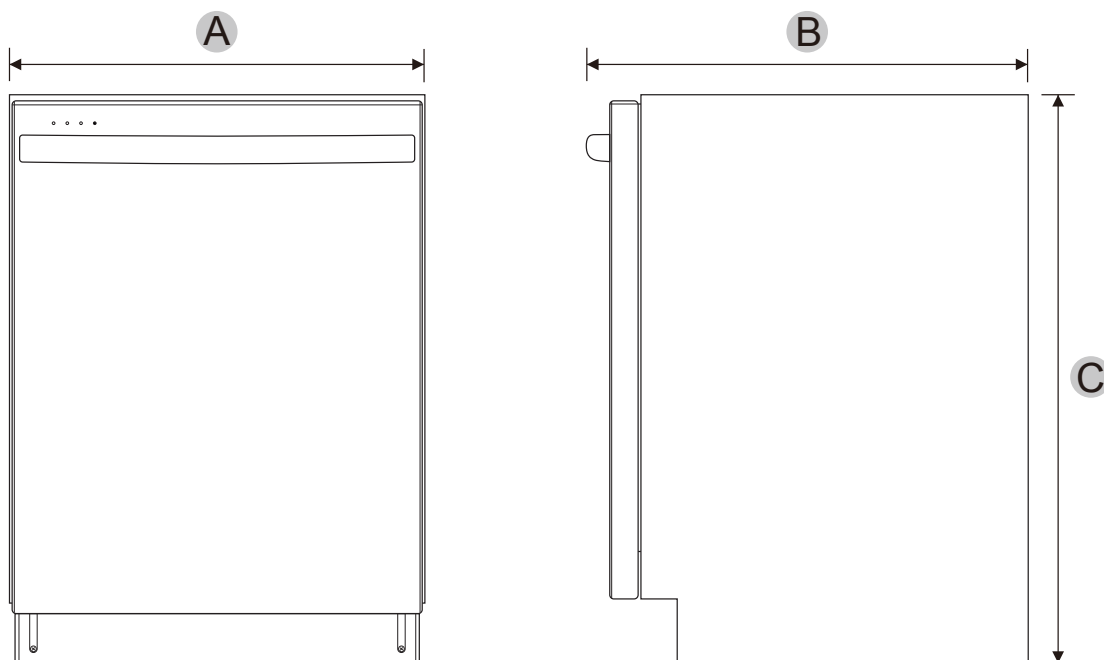

<b>A</b> (in / mm)	23-7/8 / 606	<b>B</b> (in / mm)	24-1/2 / 623	<b>C</b> (in / mm)	33-3/4 / 857
--------------------	--------------	--------------------	--------------	--------------------	--------------

## ELECTRICAL REQUIREMENTS

- This dishwasher is designed for operation on an adequately wired individual 120 V, 60 Hz, 15- or 20-amp fused electrical supply with copper wire only. It is recommended that a time-delay fuse or circuit breaker is used, and that a separate circuit serving only this appliance is provided. If an outlet is used, the outlet should be placed in adjacent cabinet.

## LOCATION REQUIREMENTS

- Install where dishwasher is protected from the elements. Protect against freezing to avoid possible rupture of fill valve. Such ruptures are not covered by the warranty. For winter storage information, see “Storing” in the “Dishwasher Care” section.
- Install and level dishwasher on a floor that will hold the weight and in an area suitable for its size and use.

## WATER SUPPLY REQUIREMENTS

- The water supply temperature should be 120°F to 150°F (49°C to 66°C).
- The water supply must maintain water pressure between 20 and 80 psi for sufficient flow.