

## Perma-Patch

### Multi-Purpose Drywall Patch

The patches are imprinted with can light and standard receptacle patterns for easy trimming. Perma-Patch will not fuzz-up during sanding. One Perma-Patch repairs holes up to five inches in diameter.

- Outperforms metal patches.
- Quickly repairs door knob damage to drywall.
- Makes easy repairs to receptacles, ceiling and can lights, and miscuts.
- The most economical and permanent way to repair drywall.

#### Product Data & Ordering Information:

Product Code	Width	Type	Pcs/Case Pack	Cases/Pallet
PP-2PK	8" x 8"	2 Pack Card	50 cards of 2	24
PP-100	8" x 8"	10 Count Bag	10 bags of 10	24
PP-500	8" x 8"	10 Count Bag	50 bags of 10	24


#### ASTM & Code Standards:

- ASTM C1047 - Standard Specification for Accessories for Gypsum Wallboard
- SDS & Product Certification Information is available at [www.clarkdietrich.com/SupportDocs](http://www.clarkdietrich.com/SupportDocs)

#### Installation

- To apply, lightly sand area to be repaired.
- Apply drywall compound 1/8"-1/4" thick directly to back of patch.
- Place patch over center of repair and wipe down flat to wall using joint knife.
- Immediately skim-coat patch and let dry.
- Apply second coat, let dry, and sand. Compound that remains on backside of Perma-Patch makes patch very rigid in the damaged area.

#### 09.22.00 (Support for Plaster & Gypsum Board)

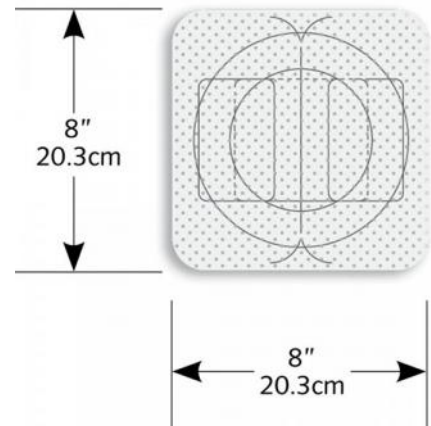

#### Project Information

Name:  
Address:

#### Contractor Information

Name:  
Contact:  
Phone:  
Fax:

#### Architect Information

Name:  
Contact:  
Phone:  
Fax: