
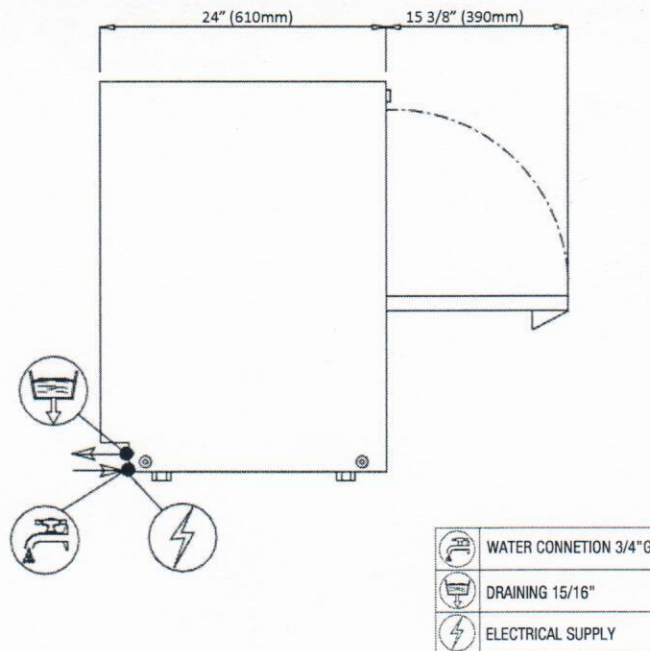


UNDERCOUNTER DISHWASHER

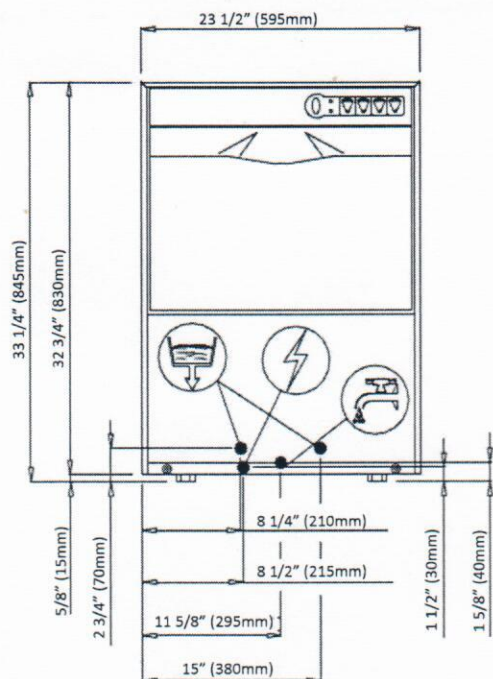

	WATER CONNECTION 3/4" G
	DRAINING 1 1/2"
	ELECTRICAL SUPPLY

Inches: External Dimensions W x D x H	23 1/2" x 24" x 33 1/4"
mm: External Dimensions W x D x H	596 x 610 x 845 mm
Weight	134 lbs (60.78 kg)
Inlet Water Pressure/Flow Pressure	25 – 60 PSI / 15-25 PSI
Plates Diameter	12 3/4" (323.85mm)
Dishes Max Height	12 1/4" (311.15mm)
Rack Dimension	20" x 20" (508mm x 508mm)
Washing Cycles	1 (120seconds) 2 (180seconds)
Racks / h	30 / 20
Water Inlet Temperature	140°F (60°C)
Water Consumption	0.60 gallon (2.27 L) water pressure 200kPa
Booster Capacity	1.5 gallons (5.68 L)
Booster Heating Element	4500W
Rinsing Temperature (set)	185°F (85°C)
Tank Capacity	7.1 gallons (26.88 L)
Tank Heating Element	2700W
Wash Temperature (set)	155°F (68°C)
Pump Power	0.87HP/650 W (89.8 gal(US)/min***)

*** Maximum Flow Rate

Due to periodic changes in designs, methods, procedures, policies and regulations, the specifications contained in this sheet are subject to change without notice.
While we exercise good faith efforts to provide information that is accurate, we are not responsible for errors or omissions in information provided or conclusions reached as a result of using the specifications.
By using the information provided, the user assumes all risks in connection with such use.