


PREPARATION



1. Record your model number for future reference.
2. **DANGER: Risk of electric shock.** To avoid electric shock, the power must be turned off at the circuit breaker or fuse box before beginning the installation procedure.
3. **DANGER: Risk of electric shock.** To avoid electric shock, the outlet box must be properly grounded.
4. **Important Information.** Inspect the product for any damage. This product is for indoor use only. Observe all local codes.
Please see next page for a larger installation image

TOOLS AND MATERIALS NEEDED

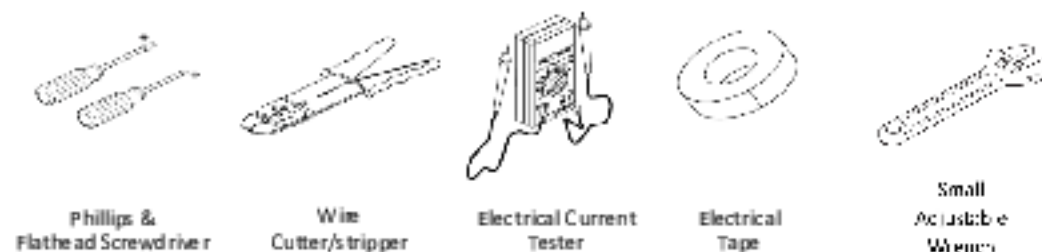

FIXTURE INSTALLATION

1. Remove the fixture and parts bag(s) from the carton. Put them onto a clean and soft cloth to protect finish. Confirm all parts are included.
2. Loosen ball nuts (L), remove back plate (G) from glass cage (I). Then loosen screws (F), remove mounting plate (B) from back plate (G).
3. Loosen ball nut (L), remove bracket (K) from glass cage. Insert glass rods (J) into glass cage (I), repeat this step until all 16 pcs glass rods are installed. Then install bracket (K) onto glass cage (I) with ball nut (L).
4. Attach mounting plate (B) onto outlet box with screws (D). Ensure ground screw (C) is attached to mounting plate.
5. **NOTICE:** To avoid short circuit, make sure wires are not exposed. Fasten fixture green or bare ground wire to the green or bare copper wire in outlet box with wire nut (A) or fasten onto ground screw (C) on mounting plate.
6. **NOTICE:** To avoid short circuit, make sure wires are not exposed. Fasten fixture white wire to the white wire in outlet box with wire nut (A). Wrap the wire connector with electrical tape so that the tape seals the end of wire nut (A). See diagram 1.
7. **NOTICE:** To avoid short circuit, make sure wires are not exposed. Fasten the fixture black wire to the black wire in outlet box with wire nut (A). Wrap the wire connector with electrical tape so that the tape seals the end of wire nut (A). See diagram 1.
8. Insert quick connector (E) into the opposing quick connector end.
9. Tuck wires carefully inside outlet box. Attach back plate (G) onto mounting plate (B) with screws (F).
10. **NOTICE:** Do not exceed recommended wattage. Rated **Max 60W, Type B.** (Bulb(s) not included).
11. Install bulbs onto the sockets.
12. Install glass cage (I) onto back plate (G) with ball nuts (L).
13. Restore power to circuit at breaker or fuse box.

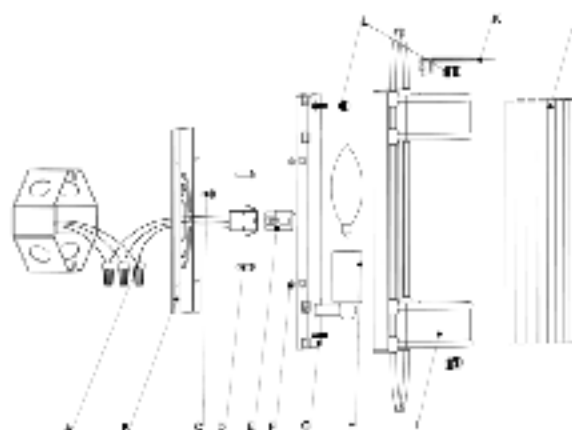

CLEANING: Please clean fixture with a soft and dry cloth ONLY. Clean glass with a mild soap.