



INSTALLATION INSTRUCTIONS


NO.1001

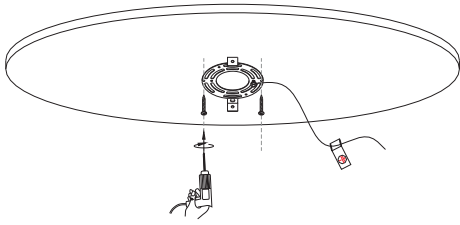


7. Secure the mounting bracket to the ceiling using the provided screws

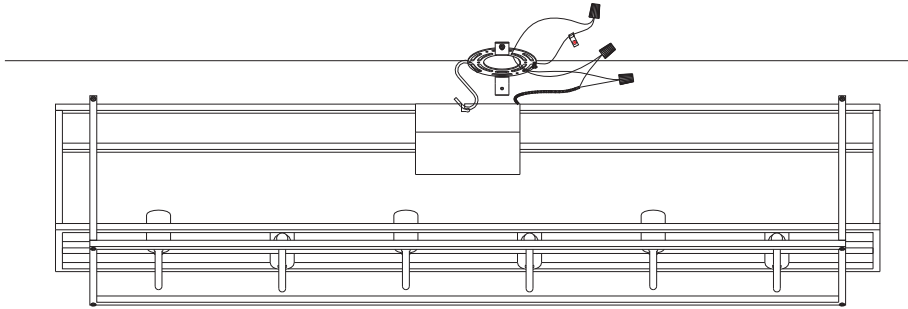

8. Use the hook to hang the lamp body. Turn off the power, then connect the live and neutral wires from the power supply to the corresponding wires of the lamp. Secure the connections tightly with wire caps to prevent electrical leakage.

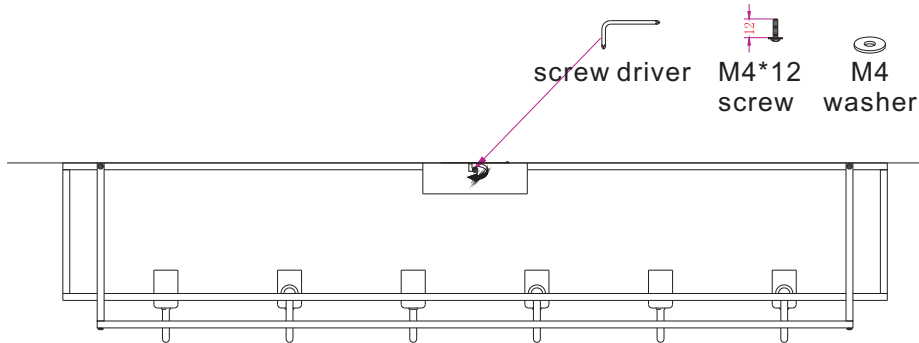

9. Align the holes on the canopy with the holes of the mounting bracket, and secure them using M4*12 screws and M4 washers.

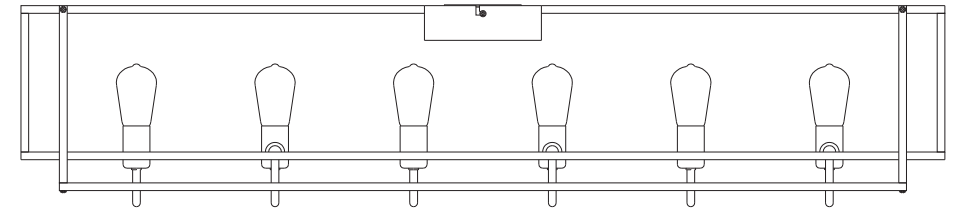

Please Scan the QR code to watch the installation video. If you have any questions, please feel free to contact us through the order page.




Please Scan the QR code to watch the installation video. If you have any questions, please feel free to contact us through the order page.




Warning!

1. Installation should be performed by a professional.
2. To prevent electric shock, please turn off the power before installing, repairing, or cleaning the light fixture.
3. This light fixture operates within a 110V to 265V range only.
4. Do not install the light fixture in damp conditions.
5. Keep the light fixture away from acidic and corrosive materials.


Package Includes

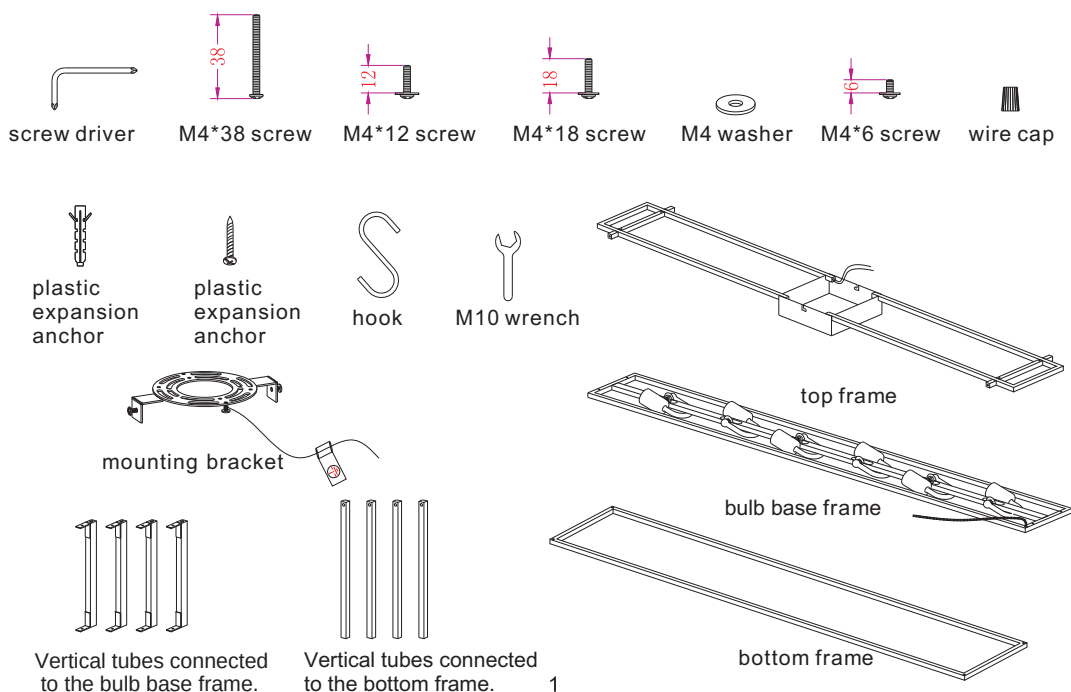


Installation Steps

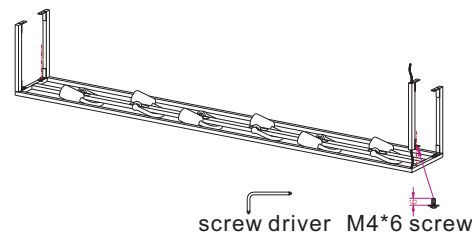


1. Pass the main wire of the lamp base frame through a vertical tube, align the hole, and tighten with an M4*6 screw. For the remaining 3 tubes, align the holes and tighten without passing the wires through.

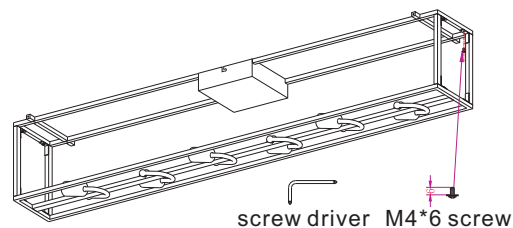


3. After guiding the main wire into the canopy, align the holes and secure with M4*6 screws.

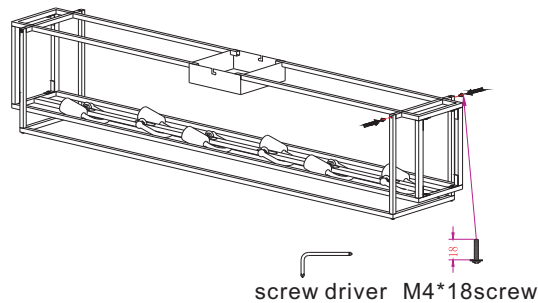


5. Align the vertical tubes with the sides of the square tubes in the top frame and tighten with M4*18 screws.

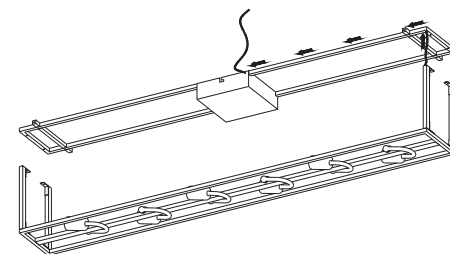

2. Guide the main wire of the lamp base frame through the top frame's hole and into the canopy.

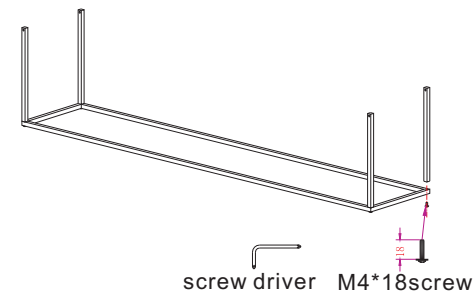

4. Align the vertical tubes with the holes in the bottom frame and tighten with M4*18 screws.

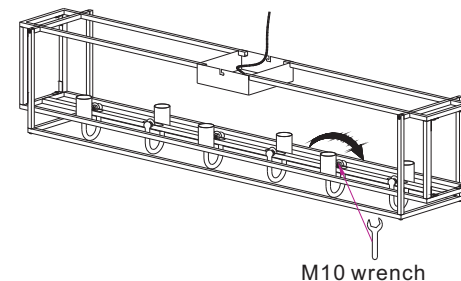

6. Secure the lamp base frame with an M10 wrench.