


MOUNTING AND WIRING

WARNING:

Improper installation may cause electrical shock, fire, or equipment damage. The person performing the installation must be familiar with the construction and operation of the product and associated hazards

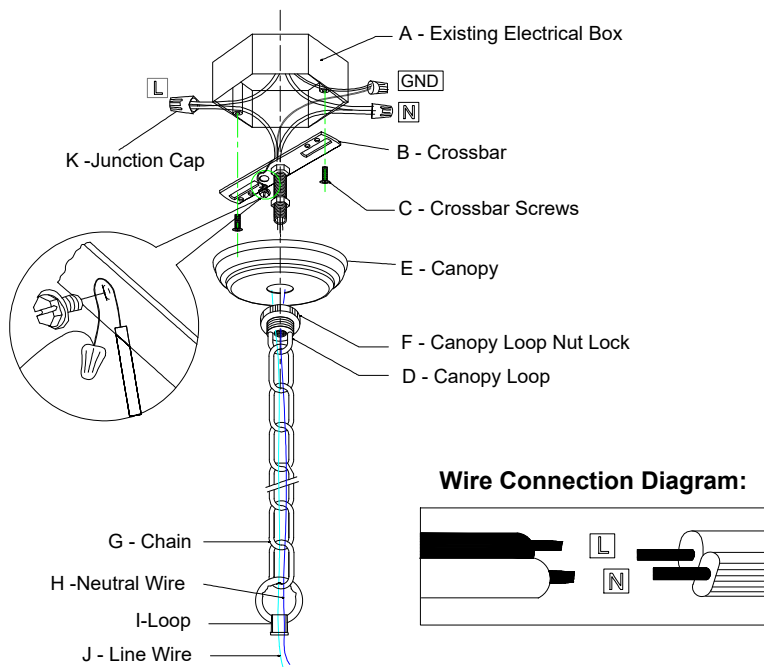

Please proceed in an alphabetical order:

- Attach the Crossbar(B) to the existing electrical box(A) using the two crossbar screws(C), which are not supplied and should already be in your electrical box.
- Slide the canopy loop nut lock(F) back up over the canopy loop(D), pass the canopy loop(D) through canopy(E), connect with the threaded pipe underside of the crossbar.
- Pass the main wire(J) and ground wire(H) through the loop(I), the chain(G), the canopy loop nut lock(F), the canopy(E), the canopy loop(D) and the crossbar(B) until the end of the main wire(J) reaches the electrical box(A) where you can make the appropriate connections. Be sure when connecting the wire use electrician approved junction caps(K). Stow the excess wire in the electrical box(A). Raise the canopy(E) and canopy loop nut lock(F), attach canopy(E) to ceiling, slide canopy loop nut lock(F) over canopy loop(D) and hold the canopy(E).

Chandelier Installation Instructions

Manufacturer Part Number: B204


Customer Service Number: (832) 478-8866

Customer Service Email: WeCareWeFix@gmail.com

Please include your name, contact methods, product name, and model number in the email.

IMPORTANT SAFETY INSTRUCTIONS:

- Please read through all the instructions carefully and completely before beginning assembly and installation
- This product must be installed in accordance with installation instructions and all safety and building codes. It is strongly suggested that all direct wired fixtures be installed by a licensed electrician
- Be sure the electricity to the wires you are working on is shut off; either the fuse is removed or the circuit breaker is turned off. Turning the power off using the light switch is not sufficient to prevent electrical shock

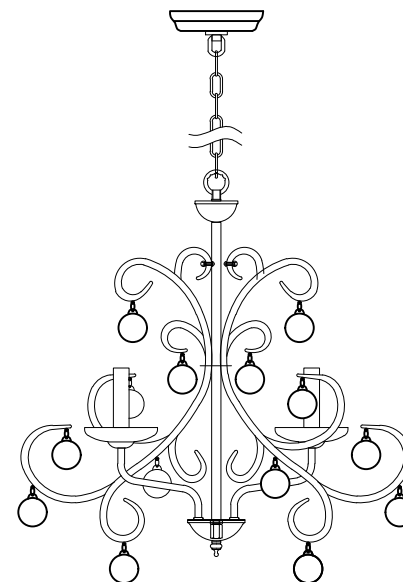


(Rated 110-120V/60Hz, bulb E12/60W maximum)

WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer or birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov


PART LIST AND ASSEMBLY ILLUSTRATION

Note: Some parts may be pre-installed or pre-assembled.

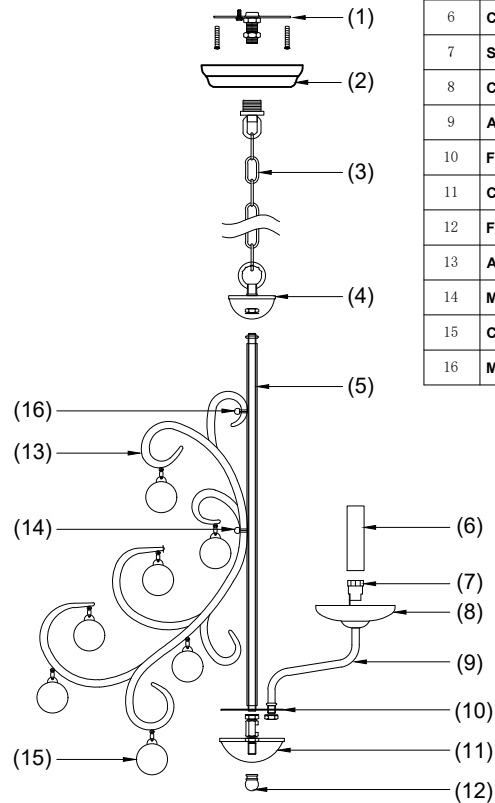


ITEM NUMBER:EPC5279AC		
NO	NAME	QUNATITY
1	SINGLE CROSS MOUNTING	1PC
2	CANOPY	1PC
3	CHAIN	1PC
4	CAP	1PC
5	MIDDLE ROD	1PC
6	CANDLE SLEEVE	5PCS
7	SOCKET	5PCS
8	CURLED CAP	5PCS
9	ARM	5PCS
10	FOUNT	1PC
11	CAP	1PC
12	FINIAL	1PC
13	ARM	5PCS
14	M4 HEX NUT	5PCS
15	CRYSTAL BALL	35PCS
16	M3 ROUND NUT	5PCS

ASSEMBLING, INSTALLATION, AND MOUNTING

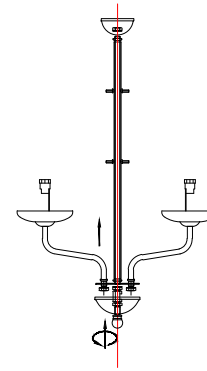

STEP 1


- 1a. Lock 5 light arms on the fount.
- 1b. Connect wires. The main wire consists of two wires. Connect all the black wires from the arm together, and connect all the white wires from the arm together. Do not mix the black and white wires, then connect black wires of the arm together with one of the main wire, connect the white wires of the arm together with the other main wire.
- 1c. Cover the cap at the bottom of the light, and use the finial to lock tightly.

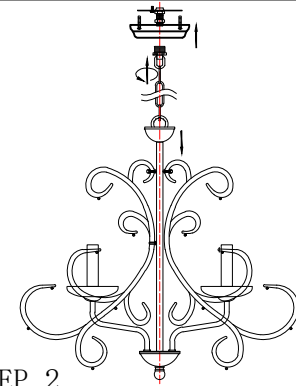

STEP 2

- 2a. Lock 5 light arms on the light body.
- 2b. Please install the chain to the light body.
- 2c. Please use two of 5/32 screws in the accessories bag to lock the crossbar to the junction box of the ceiling..
- 2d. Main wires connection on the ceiling. The main wire consists of two wires, the hot/positive(+) wire is the one which has writing on it, the neutral/negative(-) wire is the one which has no writing.

The steps hanging crystals

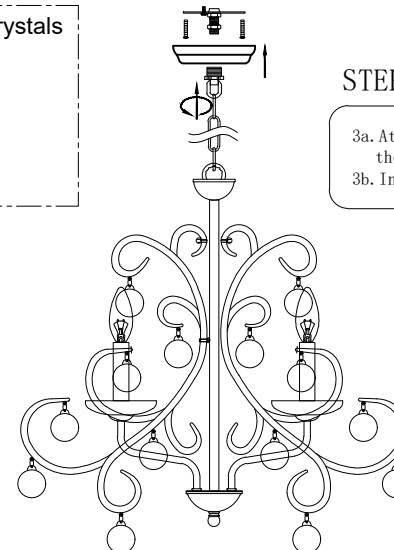

STEP 3

- 3a. Attach all the crystal balls on each loop on the light body.
- 3b. Install Five E12 light bulbs. (Not included)