


CONNECTING YOUR TUSHY

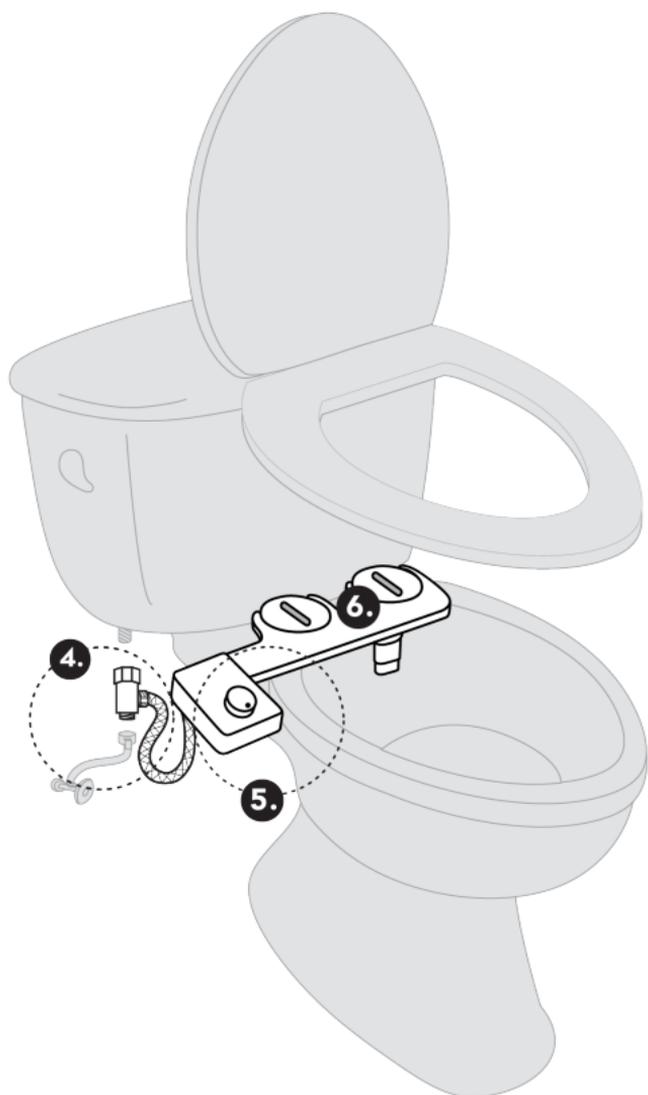

4.


CONNECT TO COOL WATER

4a.




Disconnect the existing flexible hose from your toilet tank by turning it clockwise, if you're looking at the connection from above. Be prepared to catch or wipe up some residual water that might spill onto the floor.

4b.



Screw the provided flexible hose to the mega adapter's side connection. Use a wrench to tighten it if necessary, but remember: don't overtighten!


4c.



Screw the existing flexible hose to the bottom of the mega adapter and then screw the top of the mega adapter counterclockwise (if you're looking at the connection from above) onto the tank. Be careful not to overtighten!

5.

FINISH THE WATER CONNECTION

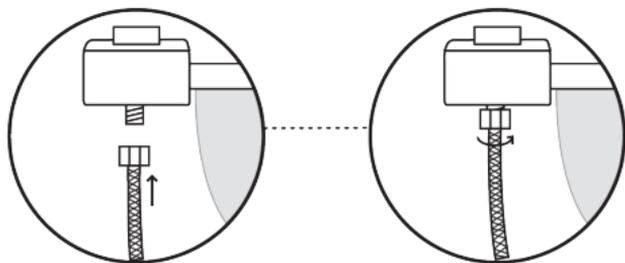

Affix the flexible hose from the mega adapter to the water port on the underside of the TUSHY console by turning counterclockwise if you're looking at the connection from above. Clockwise if you're looking up at this connection from the floor.

TUSHY TIP:

Make sure the threads of the water inlet port are lined up with the threads of the water hose. If the hose only turns once before stopping, it may be cross-threading and not sealed properly. Don't force it! Unscrew the hose and reattach until the threads line up properly.

6.


ATTACH YOUR TUSHY TO THE BOWL

6a.



Now for the big moment ... place the TUSHY on top of your toilet and line up the adjustable flanges with the holes in between the bowl and the tank used for mounting the toilet seat.

6b.




Make sure the nozzle is lined up in the center of the bowl and approximately 1/2 inch from the back rim of the bowl.

6.

ATTACH YOUR TUSHY TO THE BOWL

(CON'T.)


6c.



Reattach the toilet seat on top of the TUSHY by threading the toilet seat bolts through the adjustable flanges and through the toilet's mounting holes. Fasten the bolts by turning them clockwise.

TUSHY TIP:


Hold the underside of the toilet nuts to tighten the bolt from the top more effectively.

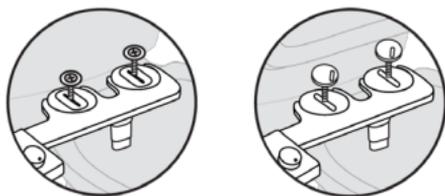

If you have a quick-release toilet seat, place those mounts you set aside on top of the TUSHY adjustable flanges and tighten through the toilet's mounting holes.

7.

CHECK FOR LEAKS



This is a super important step so that we can avoid any leaks. Nobody wants that.

Turn the water valve on and off one time to check the water connections for any leaks. If you are experiencing leaks:

- Make sure the black rubber gasket is placed correctly inside of the mega adapter.
- Make sure the threads are aligned properly.
- Make sure the hoses and adapters are tightened completely, but remember not to overtighten!

Also, be sure to touch each hose to make sure water isn't running down them. Once there are no leaks:

- Make sure your water valve is open.
- Leave a towel or a bowl below the connections, and check back on it in an hour to make sure there are no slow leaks that may not be instantly visible.
- If there is any water present after an hour, repeat the steps above. If not, you are good to go!

**YOUR BOOTY IS NOW READY
FOR THE SPRAY OF A LIFETIME.**

KNOW BEFORE YOU GO



DON'T SPRAY UNTIL YOU SIT DOWN

We know you'll be tempted, but unless you want a spray to the face or a soaked bathroom, don't spray until your butt is on that seat.



TURN THE PRESSURE KNOB VERY SLOWLY

Adjust the pressure very slowly so that the jet isn't too strong, which may cause discomfort or injury. Ease into it and find the most comfortable pressure for you.



NOZZLE WASH


If you get a little schmutz on the nozzle, don't freak! The self-cleaning nozzle rinses itself off every time you use your TUSHY.

HOW TO USE YOUR TUSHY



DO YOUR DOO

Don't be shy, everybody poops.



TURN THE KNOB

Adjust the pressure from gentle spritz to power wash. Turn clockwise to spray your rear; turn counterclockwise to spray your front.



FIND THE PERFECT ANGLE

Adjust your body by leaning forward or backward to find the right angle for a precise clean.