WALL MOUNT FIXTURE

later date Please read carefully and save these instructions, as you may need them a

CAUTION

order to prevent possible shock Turn off the main power at the circuit breaker before installing the fixture,in


GENERAL


wiring connections obtain the services of a qualified electrician. Electrical Code(N.E.C) standards. If you are unfamiliar with proper electrical All electrical connections must be in accordance with local and National

instructions that no parts are missing by referencing the illustrations on the installation Remove the fixture and the mounting package from the box and make sure

ASSEMBLY AND INSTALLATION

- 1.Attach the Cross Bar to the Outlet Box by the two Mounting Screw upward.
- 2.Screw the NIPPLE with the Washer and HEX NUT to the CROSS BAR
- 3 Make wire connections:
- ---White Wire from fixture to White Wire from power sourse.
- ---Black Wire from fixture to Black Wire from power soure.
- ---Loop the Ground Wire to Cross Bar with a Green Screw
- 3. Attach the Back Plate against the Cross Bar and screws with the Ball nut.
- 4.Put the GLASS into the SOCKET, then screw with the Metal RING and Socket ring
- INSTALLATION IS NOW COMPLETED.

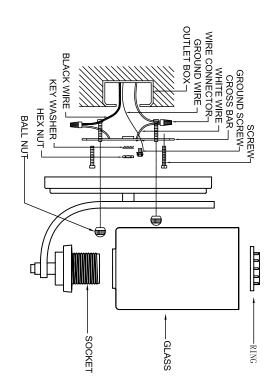



7261SN&7261RBZ