



DSP-K-16927-SD-DST Rev. E

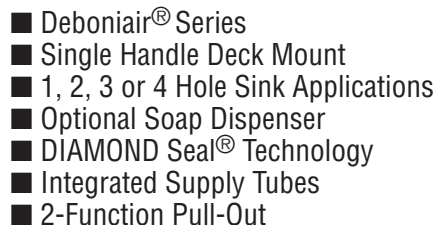

- Single handle kitchen faucets for exposed mounting on 1, 2, 3 and 4 hole sinks.
- Centermount or 8" (203 mm) centers with optional 10 1/2" (267 mm) long escutcheon included.
- 8 1/2" (216 mm) high, 9 5/8" (244 mm) long spout nestled in metal hub assembly, swings 120°.
- Spout is connected to valve body with a 53" (1346 mm) long hose.
- Pull-out spout operates in an aerated or spray mode via an easy push button.
- Lever handle shall return to neutral position when valve is turned off.
- Control mechanism shall be the diamond coated ceramic cartridge.
- Red/blue graphics on handle button to indicate hot/cold temperature.
- Touch-Clean® sprayhead.
- 3/8" O.D. straight, staggered pex supply tubes - 35" (889 mm) and 36" (914 mm) long.
- Standard 3/8" (10 mm) compression gasket fittings.
- Integral double check valves in spout.
- Soap dispenser bottle holds up to 8 oz.
- Maximum 1.80 gpm @ 60 psi, 6.8 L/min @ 414 kPa

- Lifetime limited warranty on parts (other than electronic parts and batteries) and finishes: or, for commercial users, for 5 years from date of purchase.
- 5 year limited warranty on electronic parts (other than batteries); or, for commercial users, for 1 year from the date of purchase. No warranty is provided on batteries.

- ASME A112.18.1 / CSA B125.1
- ASME A112.18.6



- Verified compliant with .25% weighted average Pb content regulations.

