

Commercial Flushometer ADA Floor-Mounted Toilet – 1.0/1.28/1.6 GPF

FEATURES

- Floor-mounted
- ADA compliant
- Elongated front bowl
- Optional CeFiONtect™ glaze prevents debris from sticking to ceramic surfaces, making them easier to clean
- Clear glazed trapway coating
- 10"-12" rough-in

MODELS

- CT705ULNG
Commercial ADA compliant, floor-mounted toilet with CeFiONtect ceramic glaze
- CT705ULN
Commercial ADA compliant floor-mounted toilet

ADDITIONAL ITEMS

- SC534 seat
- SC134 seat

FLUSH VALVES			
ECOPOWER®		MANUAL	
Exposed		Exposed	
*TET1UA32#CP	1.0 GPF	TMT1LN32#CP	1.28 GPF
*TET1LA32#CP	1.28 GPF	TMT1NNC-32	1.6 GPF
TET1GA32#CP	1.6 GPF		
Exposed 24" Breaker			
*TET6UA32#CP	1.0 GPF		
*TET6LA32#CP	1.28 GPF		
TET6GA32#CP	1.6 GPF		
Concealed 14" x 12"			
*TET2UA32#CP	1.0 GPF		
*TET2LA32#SS	1.28 GPF		
TET2GA32#SS	1.6 GPF		
Concealed 4" x 4"			
*TET3UA32#SS	1.0 GPF		
*TET3LA32#SS	1.28 GPF		
TET3GA32#SS	1.6 GPF		

*WaterSense listed



Flush valve sold separately



COLORS/FINISHES

- Standard
#01 Cotton

PRODUCT SPECIFICATION

The floor-mounted, ADA compliant low consumption siphon jet flushing toilet shall be 1.0, 1.28, or 1.6 GPF (3.8, 4.8, or 6.0 LPF) when paired with a flush valve of corresponding flush volume. Toilet shall have optional CeFiONtect ceramic glaze. Toilet shall be TOTO Model CT705ULN_____.

CODES/STANDARDS

- Meets and exceeds ASME A112.19.2/CSA B45.1
- Certifications: IAPMO(cUPC), State of Massachusetts, City of Los Angeles, and others
- Code compliance: UPC, IPC, NSPC, NPC Canada, and others
- ADA compliant



To complete a WaterSense listed combination, the bowl must be paired with a flush valve which is EPA WaterSense listed.

CT705ULN(G)

Commercial Flushometer ADA Floor-Mounted Toilet – 1.0/1.28/1.6 GPF

SPECIFICATIONS


Water Use	1.0/1.28/1.6 GPF (3.8/4.8/6.0 LPF)
Flush System	Siphon Jet Flushing Action
Water Surface	10-3/4" x 9-1/4"
Water Pressure	Min: 35 psi (Flowing) Max: 80 psi (Static)
Min. Flow Rate	24 GPM
Trap Diameter	1-7/8"
Trap Seal	2-3/8"
Rough-in	12" or 10"
Material	Vitreous China
Warranty	One Year Limited Warranty
Shipping Weight	58 lbs
Shipping Dimensions	26-1/2"L x 9-1/2" W1 x 16-1/4"W2 x 19-1/2"H

INSTALLATION NOTES

Spuds are unique for TOTO product. For replacement spuds, contact TOTO for part number THU073R.

Can be used with exposed or concealed top inlet flush valves.

DIMENSIONS

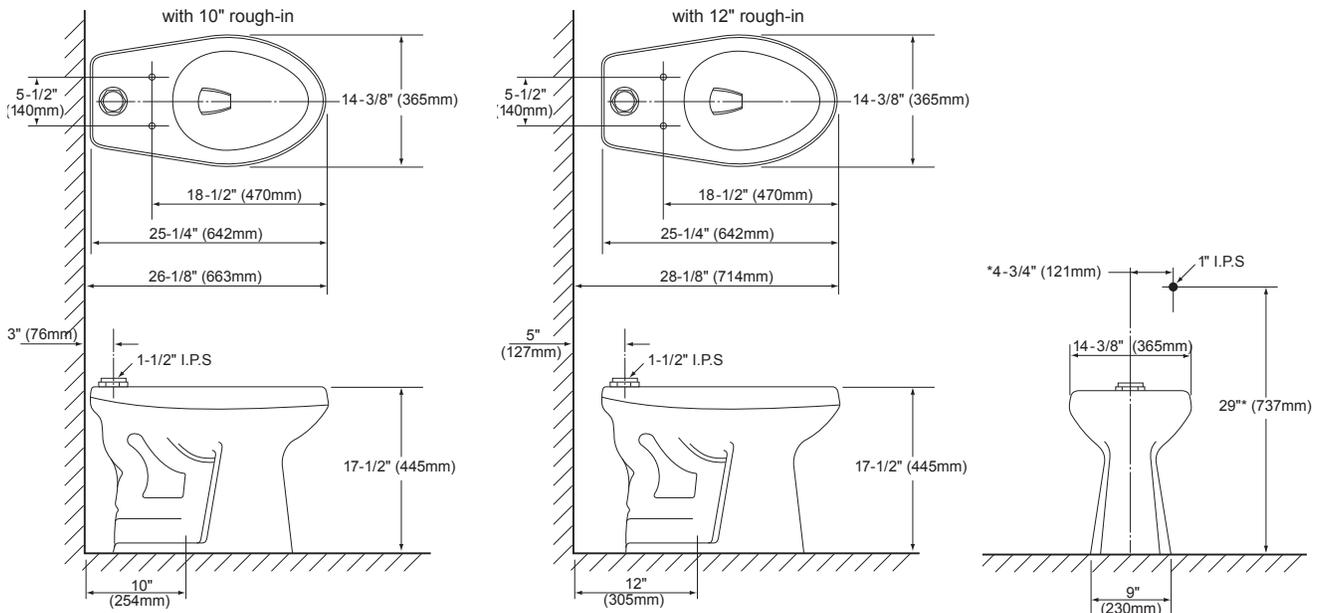

TOTO

These dimensions and specifications are subject to change without notice